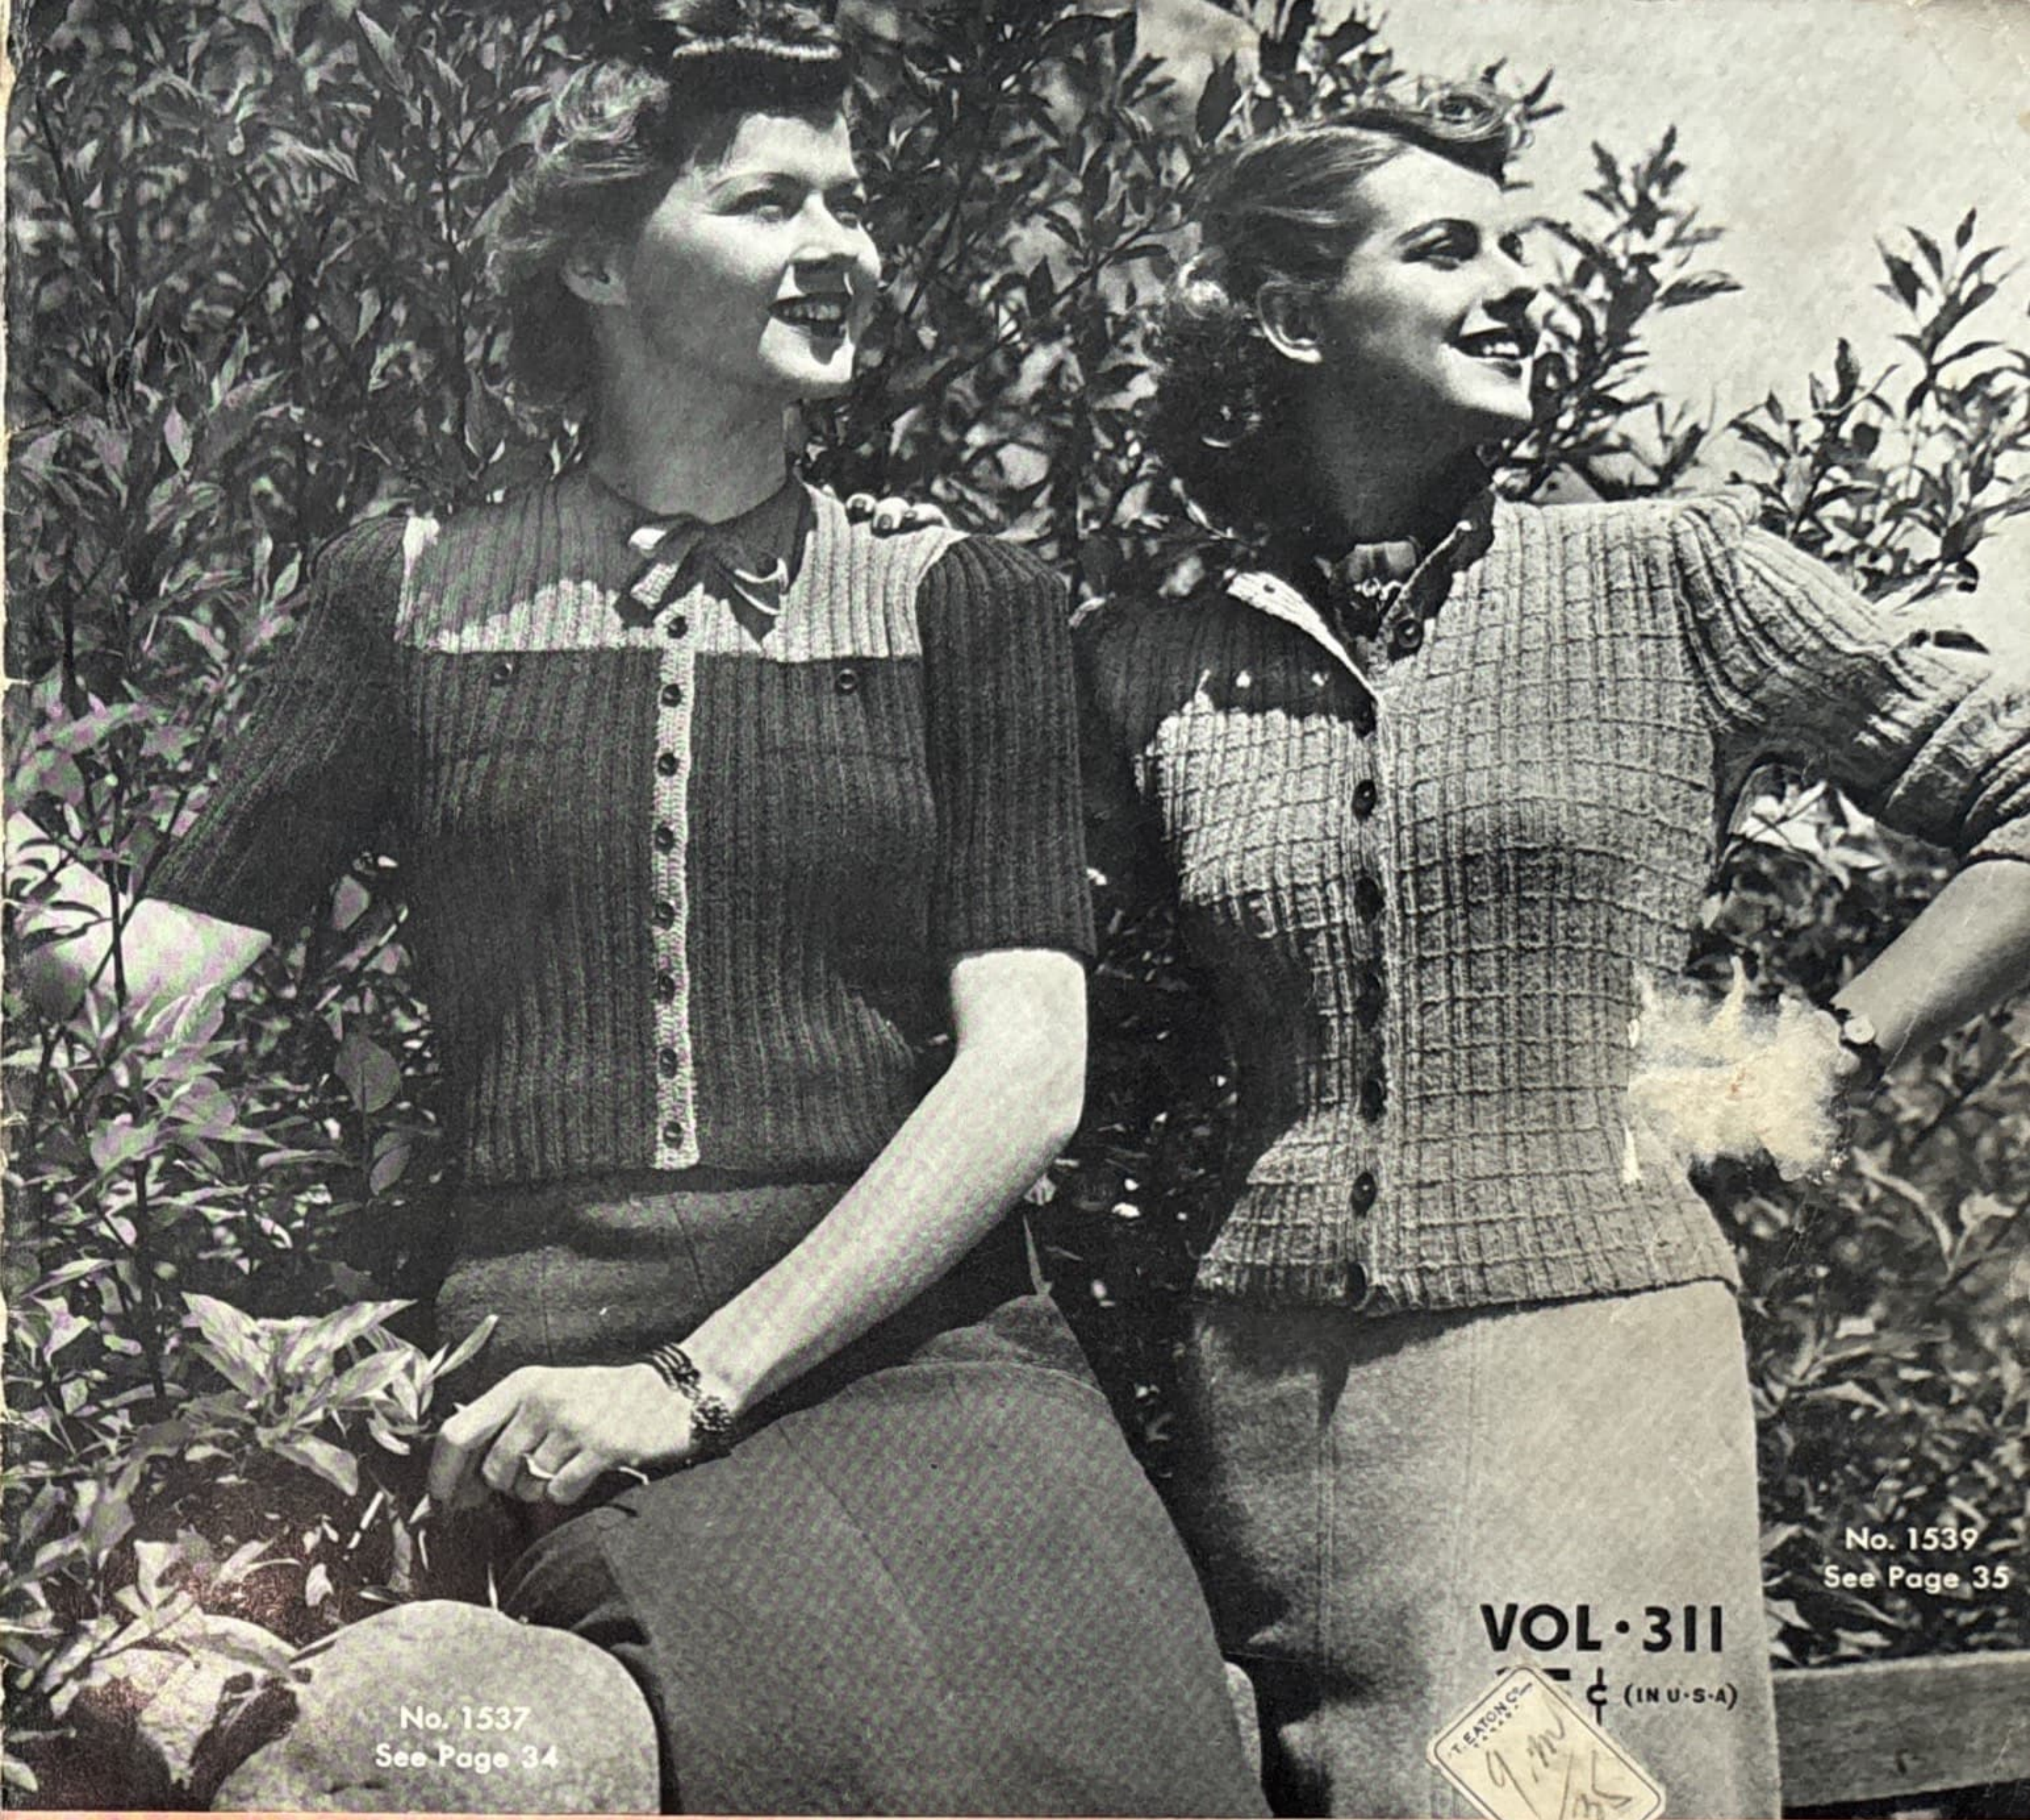

No. 1537
See Page 34

No. 1539
See Page 35

VOL·311
¢ (IN U·S·A)

T. EATON Co.
9 m/35

Hand-knit Smartness

WITH BEAR BRAND AND BUCILLA YARNS

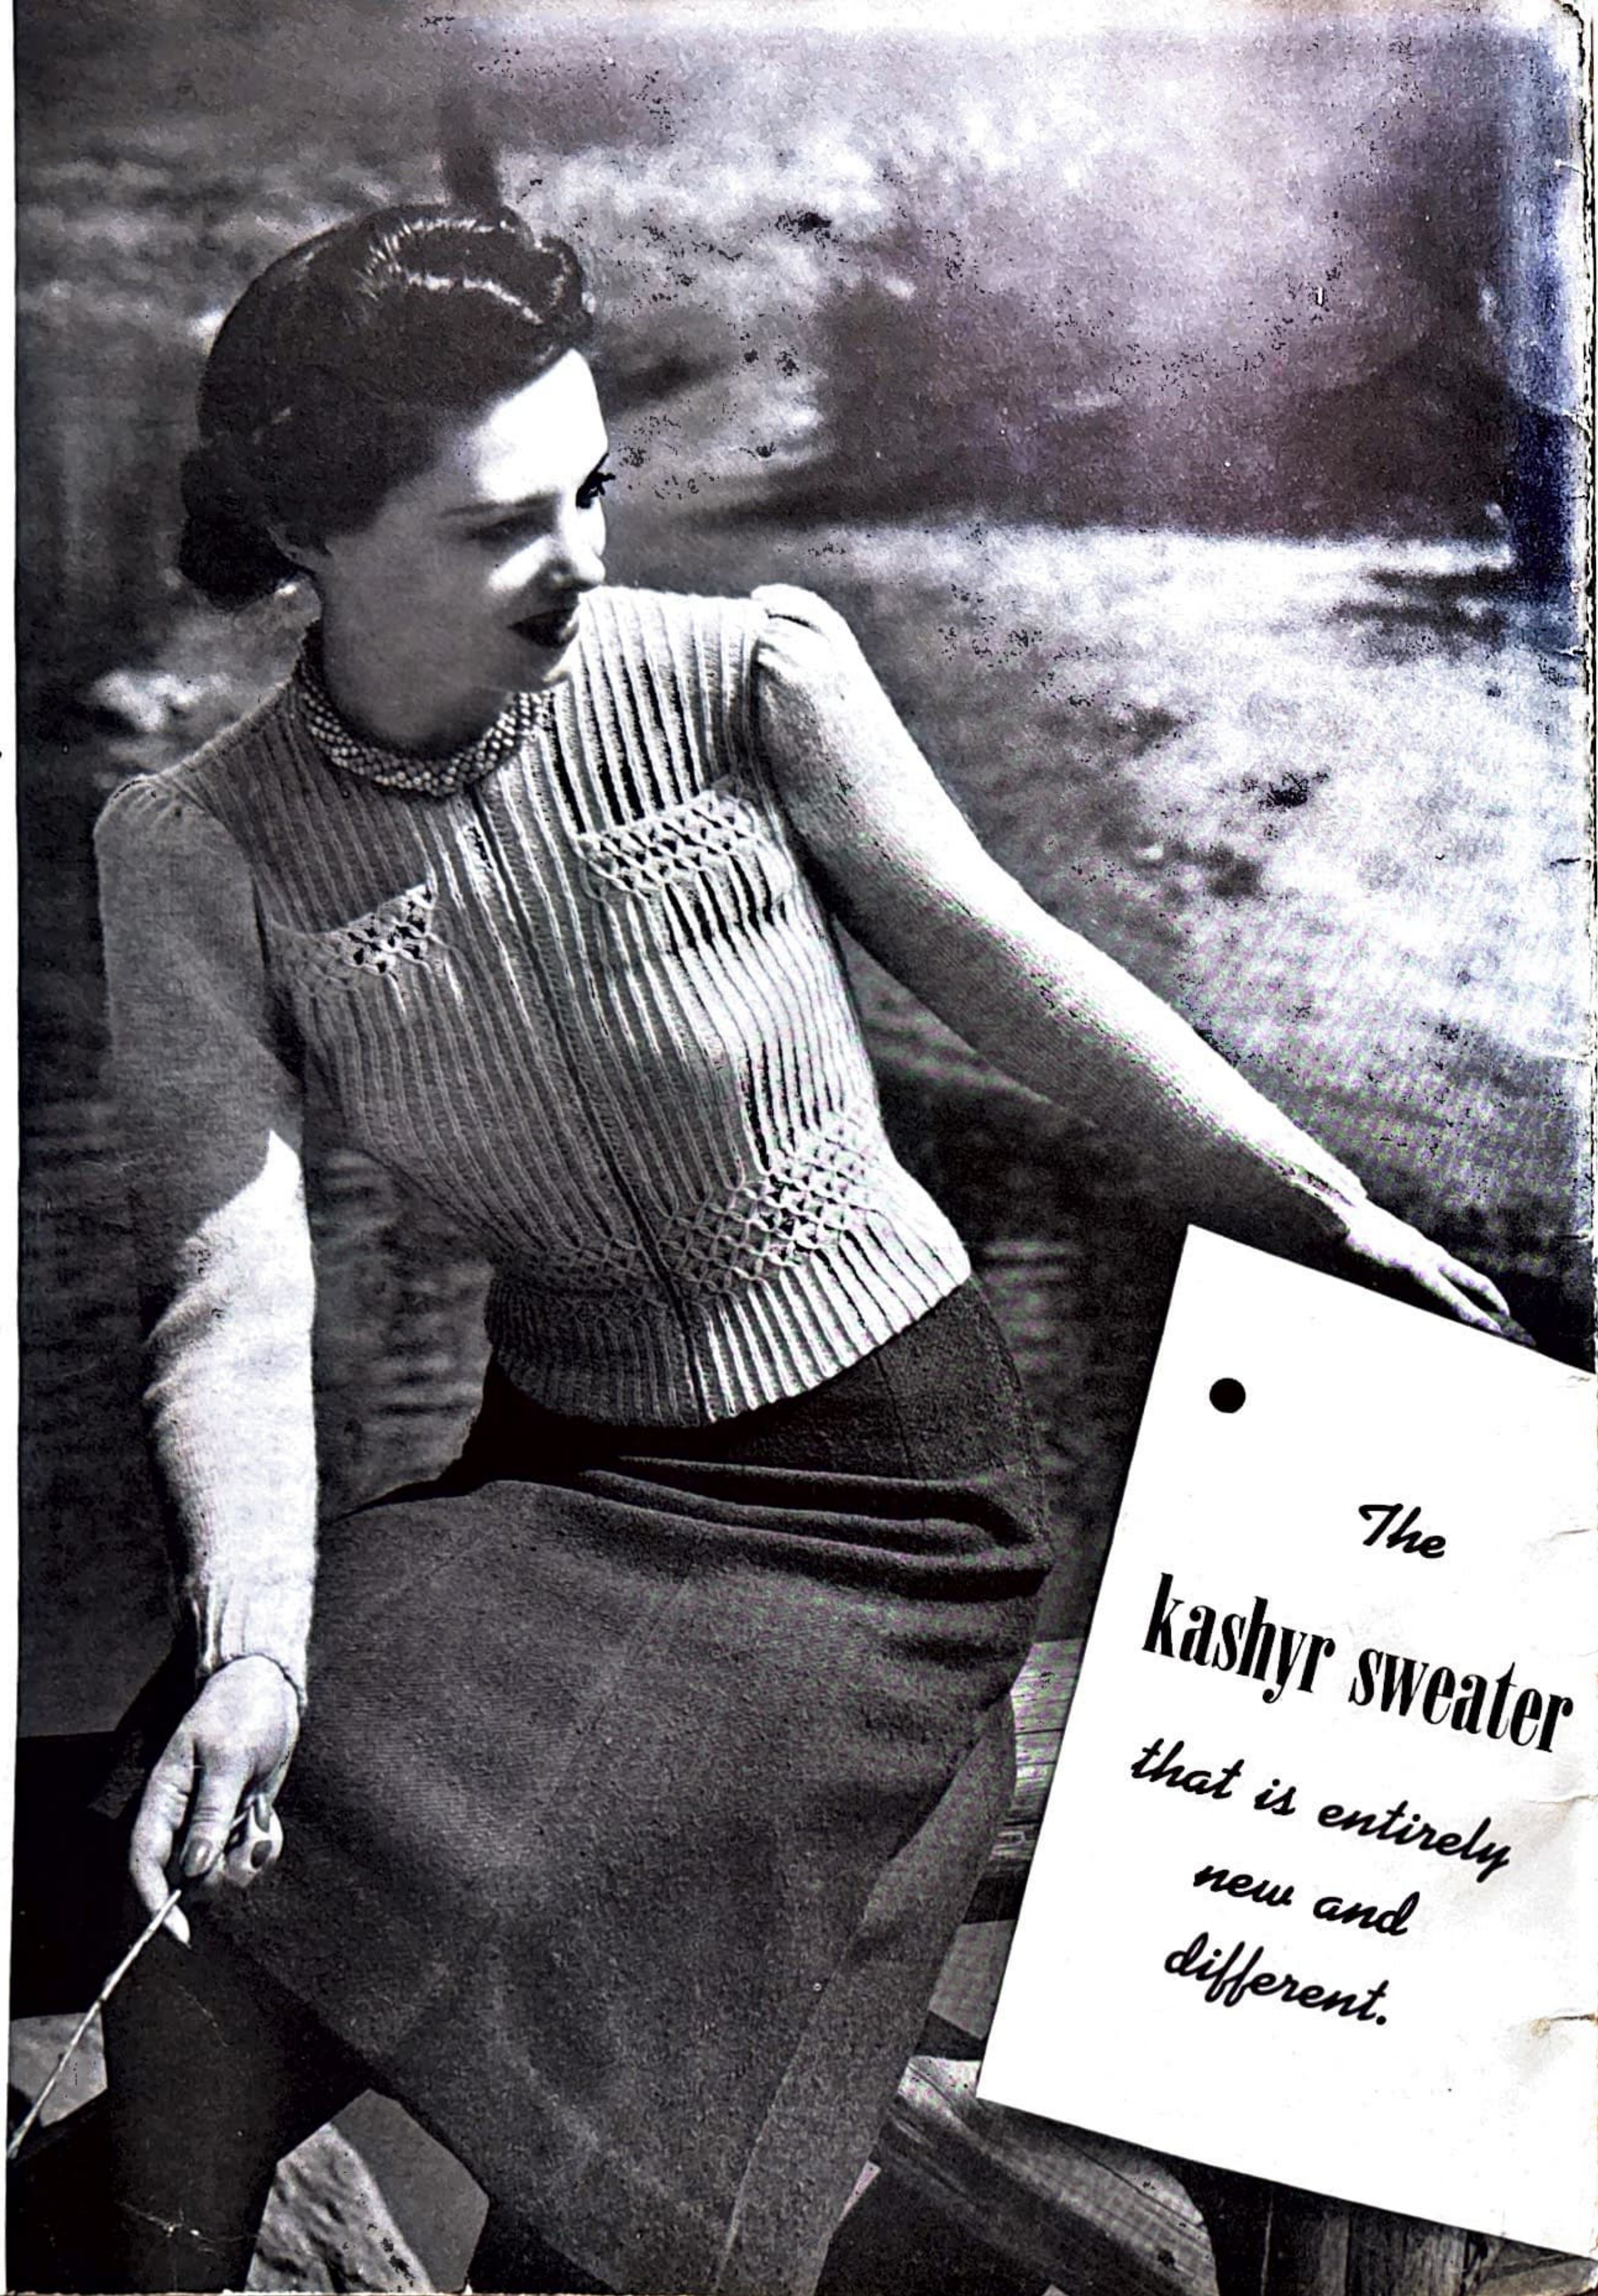

The
kashyr sweater
that is entirely new and different.

No. 1540

Kashyr Sweater No. 1540

Size 16

YARNS—Bear Brand or Bucilla Kashyr Sweater Yarn†, 6 skeins.

NEEDLES—1 pair Bucilla 14-inch White, Article 3846, Size 2.

1 pair Bucilla 14-inch Steel, Article 3499, Size 1.

Bucilla Steel Crochet Hook, Article 4300, Size 3.

TRIMMINGS—Talon Slide Fastener, Style 101, 16 inches long.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT

Width across back at underarm 16 inches.
Width across back at shoulders 13½ inches.
Width across each front at underarm 9¾ inches.
Length from lower edge to underarm 11¼ inches.
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 18 inches.

GAUGE:

White Needles—8 sts = 1 inch　　11 rows = 1 inch

BACK—With steel needles, cast on 129 sts for lower edge.

First row (wrong side)—K 2, * p 1, k 3; repeat from *, ending last repeat k 2.

2nd row—P 2, * k 1, p 3; repeat from *, ending last repeat p 2.

Repeat these 2 rows of ribbing for entire back.

Work even until 2½ inches from lower edge.

Change to white needles. Mark this point for first row of smocking.

Work even until 11¼ inches from lower edge, ending on right side.

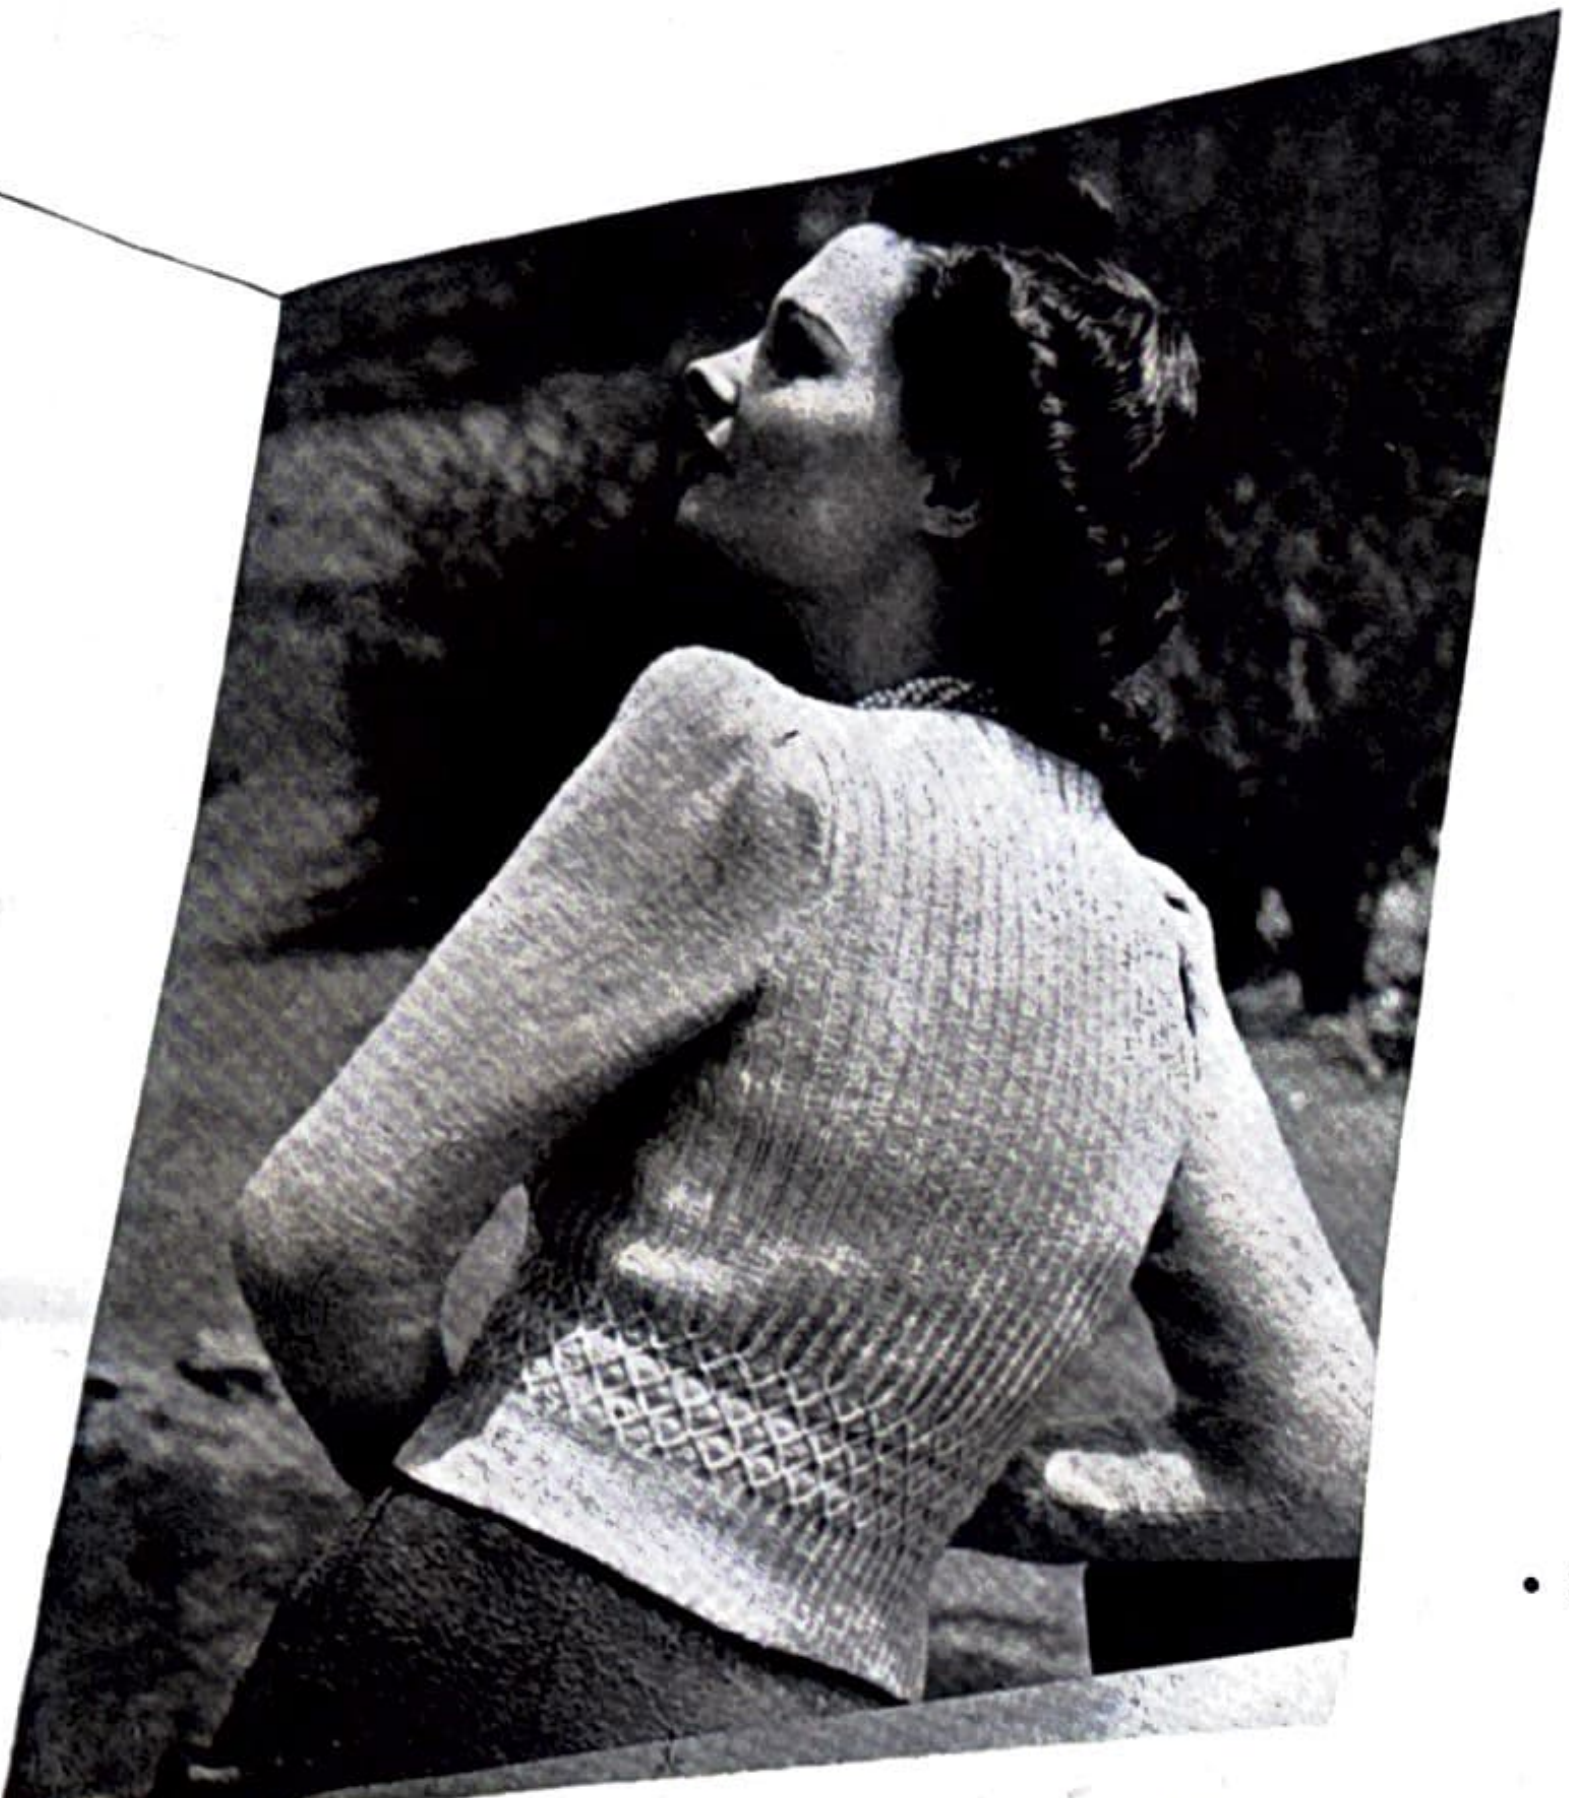

Armholes—Bind off 6 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 5 times (107 sts).

Work even until 6¾ inches above underarm.

Shoulders—Bind off 6 sts at beginning of each of next 12 rows, knitting the k sts and purling the p sts (36 sts for each shoulder).

Bind off remaining 35 sts for back of neck.

POCKET LININGS—With white needles, cast on 35 sts for lower edge.

First row (wrong side)—K 3, * p 1, k 3; repeat from * across row.

2nd row—P 3, * k 1, p 3; repeat from * across row.

Repeat these 2 rows until 3 inches from lower edge, ending on right side.

Break yarn and slip sts on holder.

Make other pocket lining in same way.

RIGHT FRONT—With steel needles, cast on 78 sts for lower edge.

First row (wrong side)—K 2, * p 1, k 3; repeat from * across row.

2nd row—P 3, * k 1, p 3; repeat from *, ending last repeat p 2.

Repeat these 2 rows of ribbing for entire front.

Work even on steel needles for same number of rows as on back (2½ inches).

Change to white needles. Mark this point for first row of smocking.

Work until same number of rows as on back up to underarm, ending on right side at underarm edge.

Armhole and Neck Shaping—Bind off 10 sts at beginning of next row for underarm. Keeping front edge even, decrease 1 st at armhole edge every 2nd row 5 times (63 sts).

Work even until 3 inches above underarm, ending at front edge.

Next row—Work 12 sts, bind off next 43 sts for pocket opening, work across row.

Next row—Work 8 sts, slip 35 sts of pocket lining to left hand needle, with right side of lining to wrong side of front and work ribbed pattern across these sts, work across remaining 12 sts (55 sts).

NOTE: Extra fullness of pocket opening is held in by smocking.

Work even until 4¾ inches above underarm, ending at front edge.

Bind off 11 sts at beginning of next row for neck edge. Keeping armhole edge even, decrease 1 st at neck edge every 2nd row 8 times (36 sts).

Work even until 6¾ inches above underarm.

Shoulder—Keeping front edge even, bind off 6 sts at armhole edge every 2nd row 6 times. Fasten off.

LEFT FRONT—With steel needles, cast on 78 sts for lower edge.

First row (wrong side)—K 3, * p 1, k 3; repeat from *, ending last repeat k 2.

2nd row—P 2, * k 1, p 3; repeat from * across row.

Work to correspond to right front up to pocket opening, binding off for underarm at beginning of a row worked from right side and ending on wrong side at armhole edge.

Next row—Work 8 sts, bind off next 43 sts for pocket opening, work across row.

Finish to correspond to right front.

SLEEVES—With steel needles, cast on 57 sts for lower edge. Work ribbing as on back for 2½ inches, ending on wrong side.

(*Continued on Page* 37)

Copyright 1939, in U. S. A. and Canada, Bernhard Ulmann Co., Inc.

Flare Rib Frock No. 1536

Size 16

YARNS — Bear Brand or Bucilla Tricolaine†, 20 skeins.

NEEDLES—Bucilla Sure-Fit 27-inch Circular Steel, Article 3496, Size 2.
Bucilla Steel Crochet Hook, Article 4300, Size 2.

TRIMMINGS—6 Buttons ¾ inch diameter.
Leather Belt 3¾ inches wide.

IMPORTANT—Check your gauge first, see page 51.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT
Width at lower edge 67 inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 30 inches.
Length 27 inches (blocked).

GAUGE: 15 sts = 2 inches 11 rounds = 1 inch

Cast on 504 sts for lower edge. Join, being careful sts do not twist on needle. Mark end of rounds as an aid in counting.
First round—* K 9, p 9, repeat from * around. Repeat first round 17 times, forming ribbing.
First decrease round—* K 9, p 4, p 2 tog, p 3, repeat from * around (476 sts).
Next round—* K 9, p 8, repeat from * around. Repeat last round 17 times.
2nd decrease round—* K 4, k 2 tog, k 3, p 8, repeat from * around (448 sts).
Next round—* K 8, p 8, repeat from * around. Repeat last round 17 times.
3rd decrease round—* K 8, p 3, p 2 tog, p 3, repeat from * around (420 sts).
Next round—* K 8, p 7, repeat from * around. Repeat last round 17 times.
4th decrease round—* K 3, k 2 tog, k 3, p 7, repeat from * around (392 sts).
Continue in this way, decreasing 28 sts in a round every 19th round twice more, decreasing 1 st at center of alternate ribs and having 1 st less in each decreased rib after each successive decrease round (336 sts).
Work even until 13 inches above lower edge.
7th decrease round—* K 6, p 2, p 2 tog, p 2, k 6, p 6, repeat from * around (322 sts).
Next round—* K 6, p 5, k 6, p 6, repeat from * around. Repeat last round until 15 inches above lower edge.
8th decrease round—* K 6, p 5, k 6, p 2, p 2 tog, p 2 (308 sts).
Next round—* K 6, p 5, repeat from * around. Repeat last round until 17 inches.
9th decrease round—* K 2, k 2 tog, k 2, p 5, k 6, p 5, repeat from * around (294 sts).
Next round—* K 5, p 5, k 6, p 5, repeat from * around. Repeat last round until 19 inches, or 8 inches shorter than desired finished length.
10th decrease round—* K 5, p 5, k 2, k 2 tog, k 2, p 5, repeat from * around (280 sts at hipline).
Work even until skirt measures 21 inches.
11th decrease round—Decrease 1 st in center of every 2nd p rib (266 sts).
Work even until skirt measures 22 inches.
12th decrease round—Decrease 1 st in each p rib not decreased in 11th decrease round (252 sts).
Continue to decrease 14 sts in a round every inch twice more, decreasing in k ribs as in p ribs (224 sts).
Next round—* K 4, p 4, repeat from * around. Repeat last round until skirt measures 26 inches.
Bind off, knitting the k and purling the p sts.

FINISHING—Working from right side, work 1 row s c on lower edge of skirt, keeping work flat; join. Ch 1, turn, work 1 s c in each st of row below; join. Fasten off.
Steam, stretching skirt to 27 inches in length, see page 51.

WAIST

MEASUREMENTS FOR FINISHED GARMENT
Width across back at underarm 16¾ inches.
Width across back at shoulders 13 inches.
Width across each front at underarm 10¼ inches, including edge.
Length from lower edge to underarm 8 inches.
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 18 inches.

GAUGE: 15 sts = 2 inches 11 rows = 1 inch

Entire waist is worked back and forth on circular needle.
BACK—Cast on 102 sts for lower edge. P 1 row.
Increase row (right side)—K 8, * increase 1 st in next st, k 11, repeat from *, ending last repeat k 9 (110 sts).
Work stockinette st (p 1 row, k 1 row), increasing 1 st each side every ¾ inch 8 times (126 sts).
Work even until 8 inches from lower edge, ending with a k row.

Armholes—Bind off 5 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 9 times (98 sts). Work even until 6¾ inches above underarm.

Shoulders—Bind off 3 sts at beginning of each of next 2 rows, then 5 sts at beginning of each of next 12 rows (33 sts for each shoulder). Break yarn. Slip remaining 32 sts on holder for collar.

LEFT FRONT—Cast on 64 sts for lower edge. P 1 row.
Increase row (right side)—K 9, * increase 1 st in next st, k 14; repeat from *, ending last repeat k 9 (68 sts).
Work stockinette st, increasing 1 st at underarm edge (*beginning* of k rows) every ¾ inch 8 times (76 sts).
P 1 row.

Yoke—**First row** (right side)—K 71, p 5 (front edge).
2nd row—K 5, p 71. Repeat first 2 rows twice.
7th row—K 63, p 4, k 4, p 5.

(*Continued on Page* 37)

The
flare rib
frock

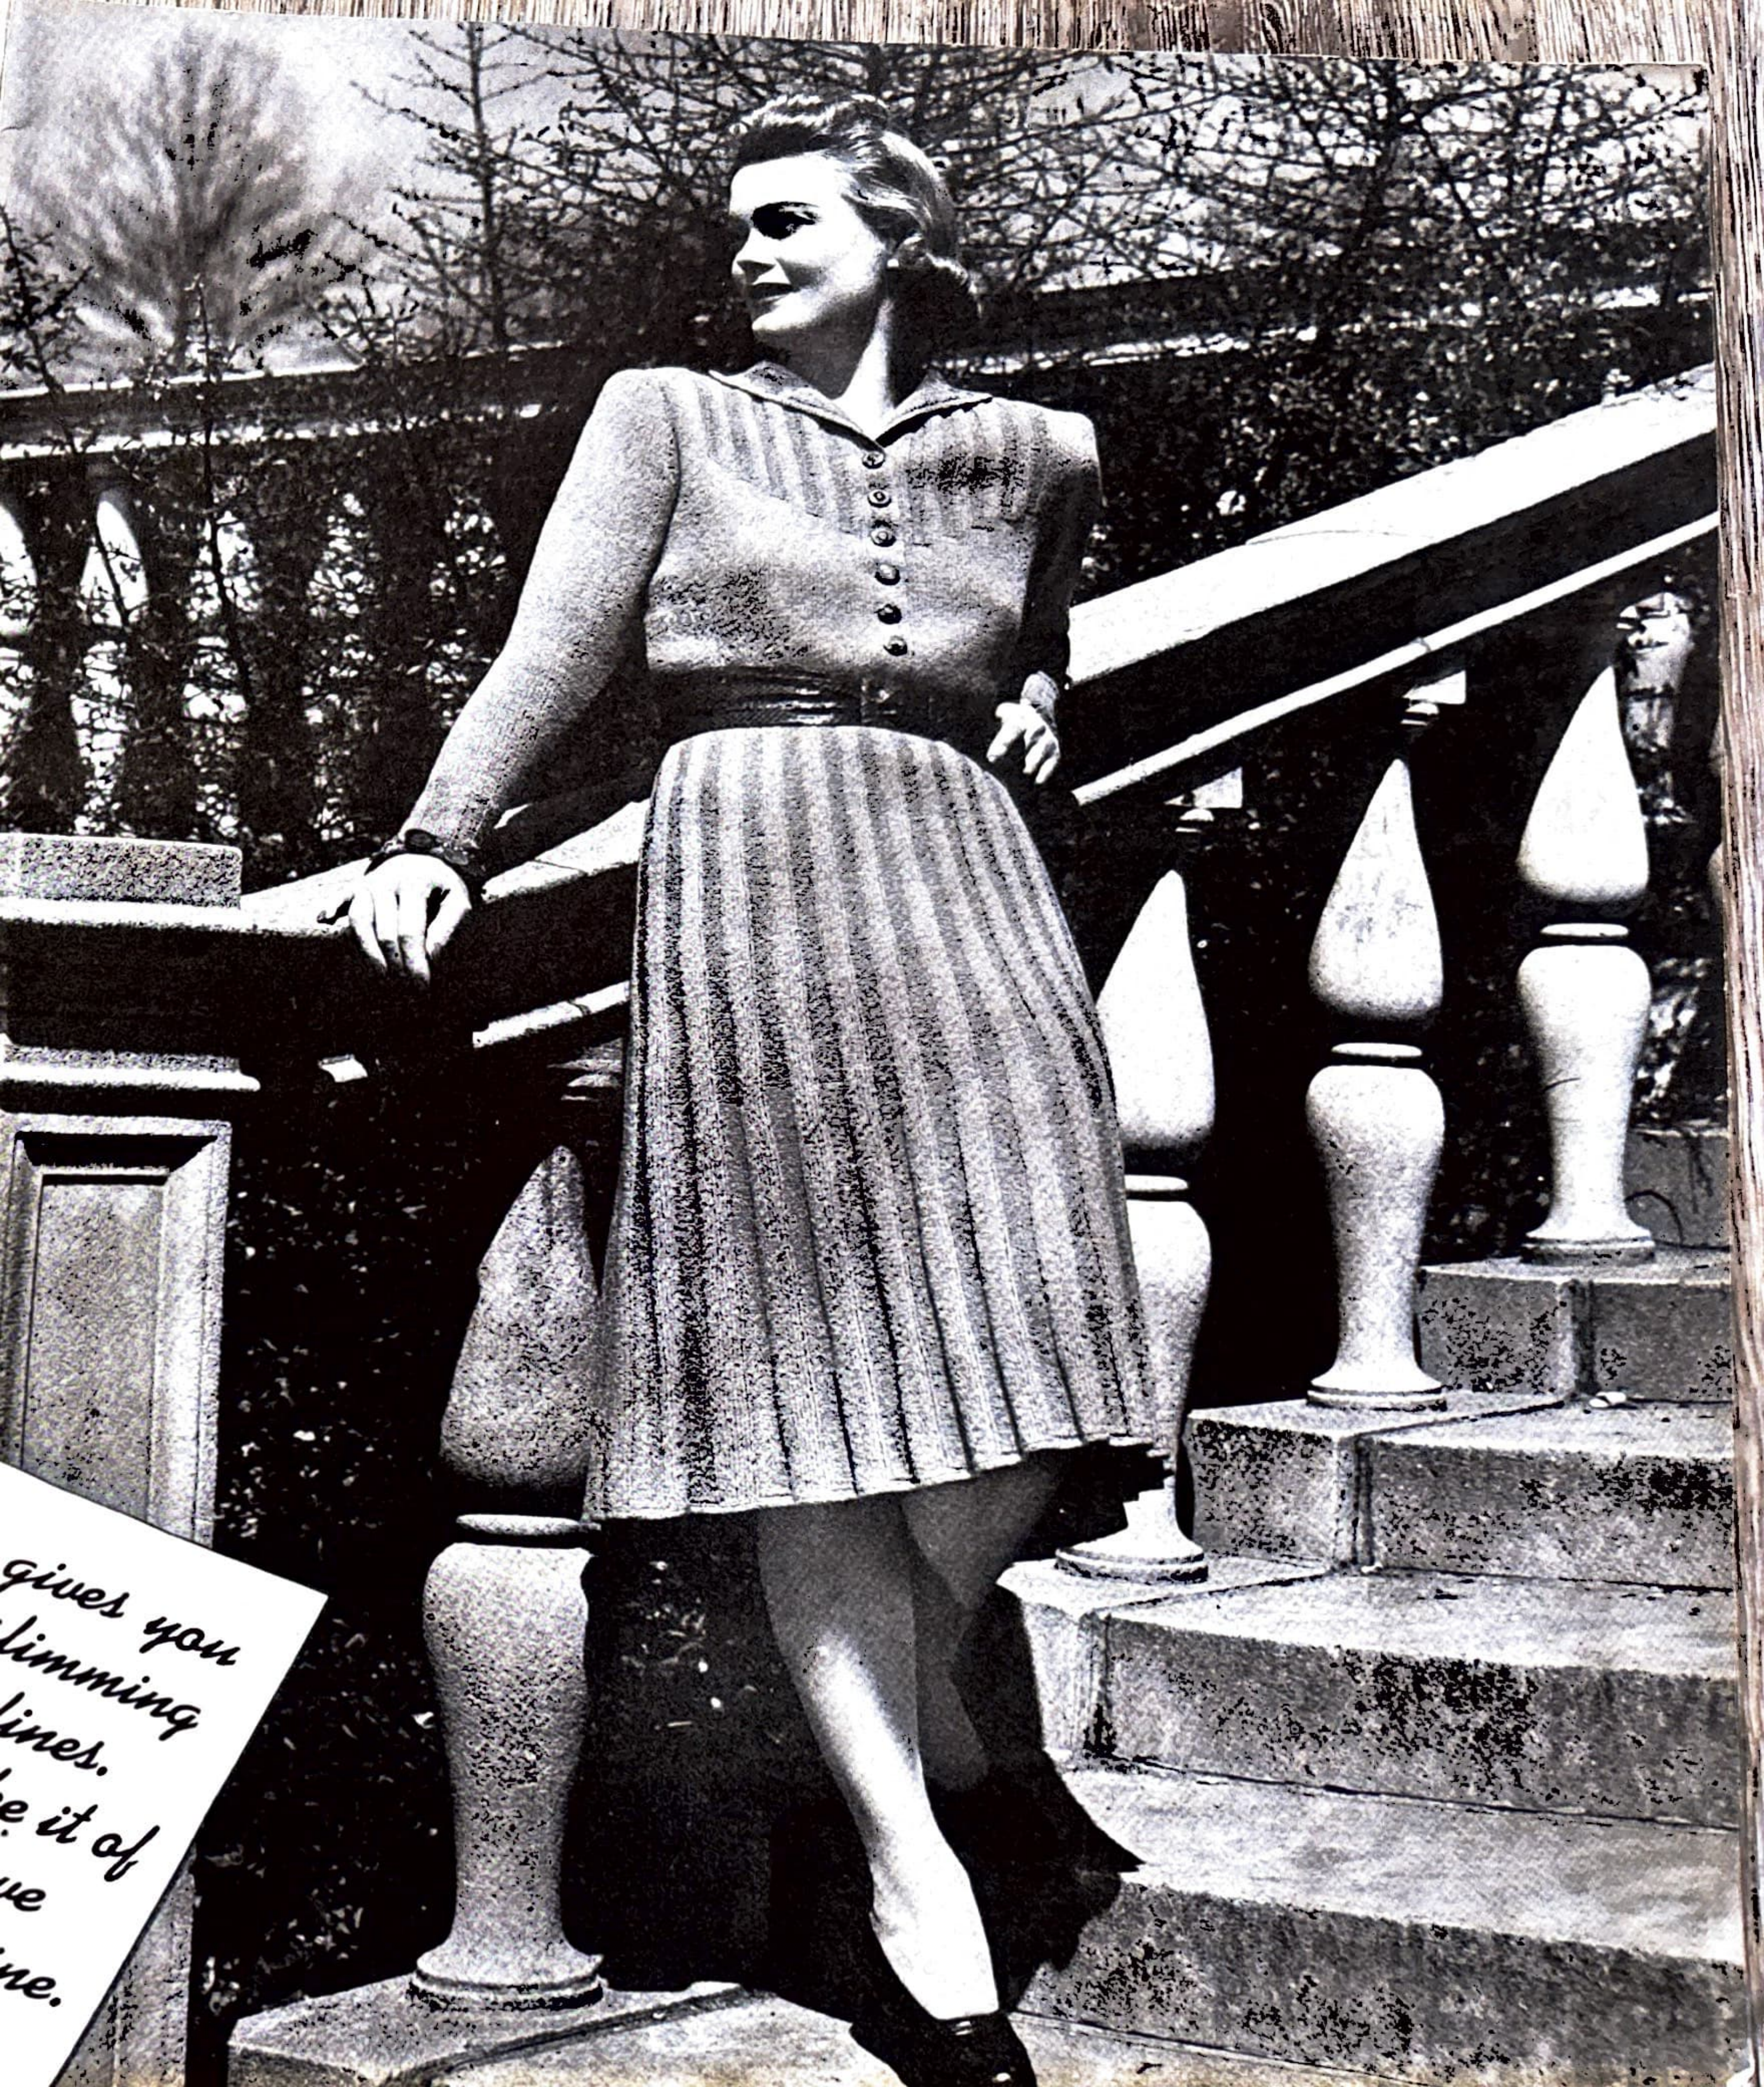

gives you
limming
lines.
e it of
ve
ne.

Cloister Slipon No. 1542

Size 16

YARNS—Bear Brand or Bucilla Kashyr Sweater Yarn†, 6 skeins.

NEEDLES—1 pair Bucilla 14-inch White, Article 3846, Size 2.
1 pair Bucilla 14-inch Steel, Article 3499, Size 1.
Bucilla Steel Crochet Hook, Article 4300, Size 3.

TRIMMINGS—7 Buttons ⅜ inch diameter.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT
Bust 35½ inches.
Width across back at underarm 17 inches.
Width across back at shoulders 12½ inches.
Width across front at underarm 18½ inches.
Length from lower edge to underarm 11 inches.
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 18 inches.

GAUGE: Size 2 needles

Stockinette St	— 8 sts=1 inch	11 rows=1 inch
Pattern St	— 8 sts=1 inch	12 rows=1 inch

BACK—With steel needles cast on 104 sts for lower edge.

Ribbing—First row—* K 2, p 2; repeat from * to end. Repeat first row until 4 inches from lower edge.
Increase row—Work ribbing, increasing 1 st in first st, then in every 4th st 24 times, then in last st (130 sts). This completes ribbing.
Change to white needles and work stockinette st (k 1 row, p 1 row) increasing 1 st each side every 2 inches 3 times (136 sts).
Work even until 11 inches from lower edge.

Armholes—Bind off 9 sts at beginning of each of next 2 rows for underarm.
Decrease 1 st each side every 2nd row 9 times (100 sts).
Work even until 2 inches above underarm, ending with a p row.
Begin yoke and divide for back opening as follows:

Right Side of Yoke—First row (right side)—* P 3, k 1 *; repeat between *'s 11 times, p 2, cast on 3 sts for underlap; slip remaining 50 sts to a strand of yarn to be held for left side.
2nd row—K 5, * p 1, k 3 *; repeat between *'s to end.
3rd row—Repeat between *'s of first row 12 times, p 5.
4th row—P all sts.
5th row—K all sts.
6th row—Same as 4th row.
7th row—Same as 3rd row.

(*Continued on Page* 38)

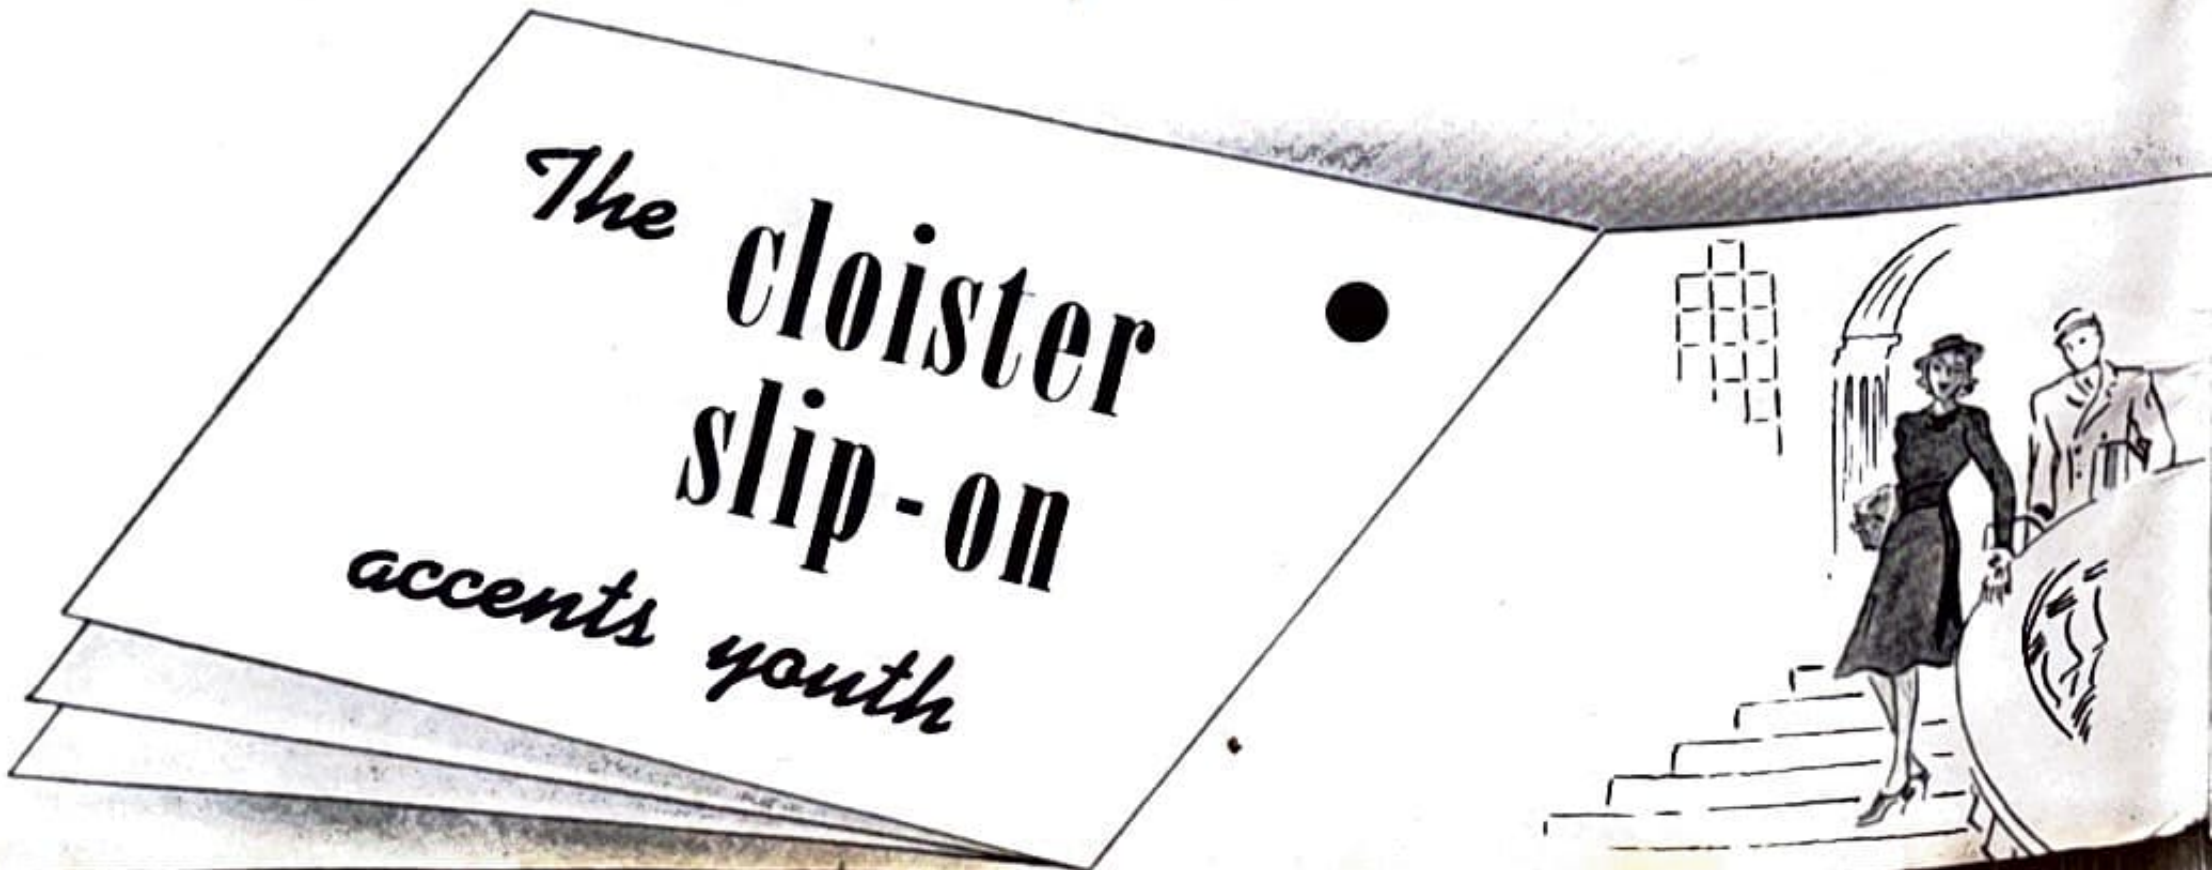
The cloister slip-on accents youth

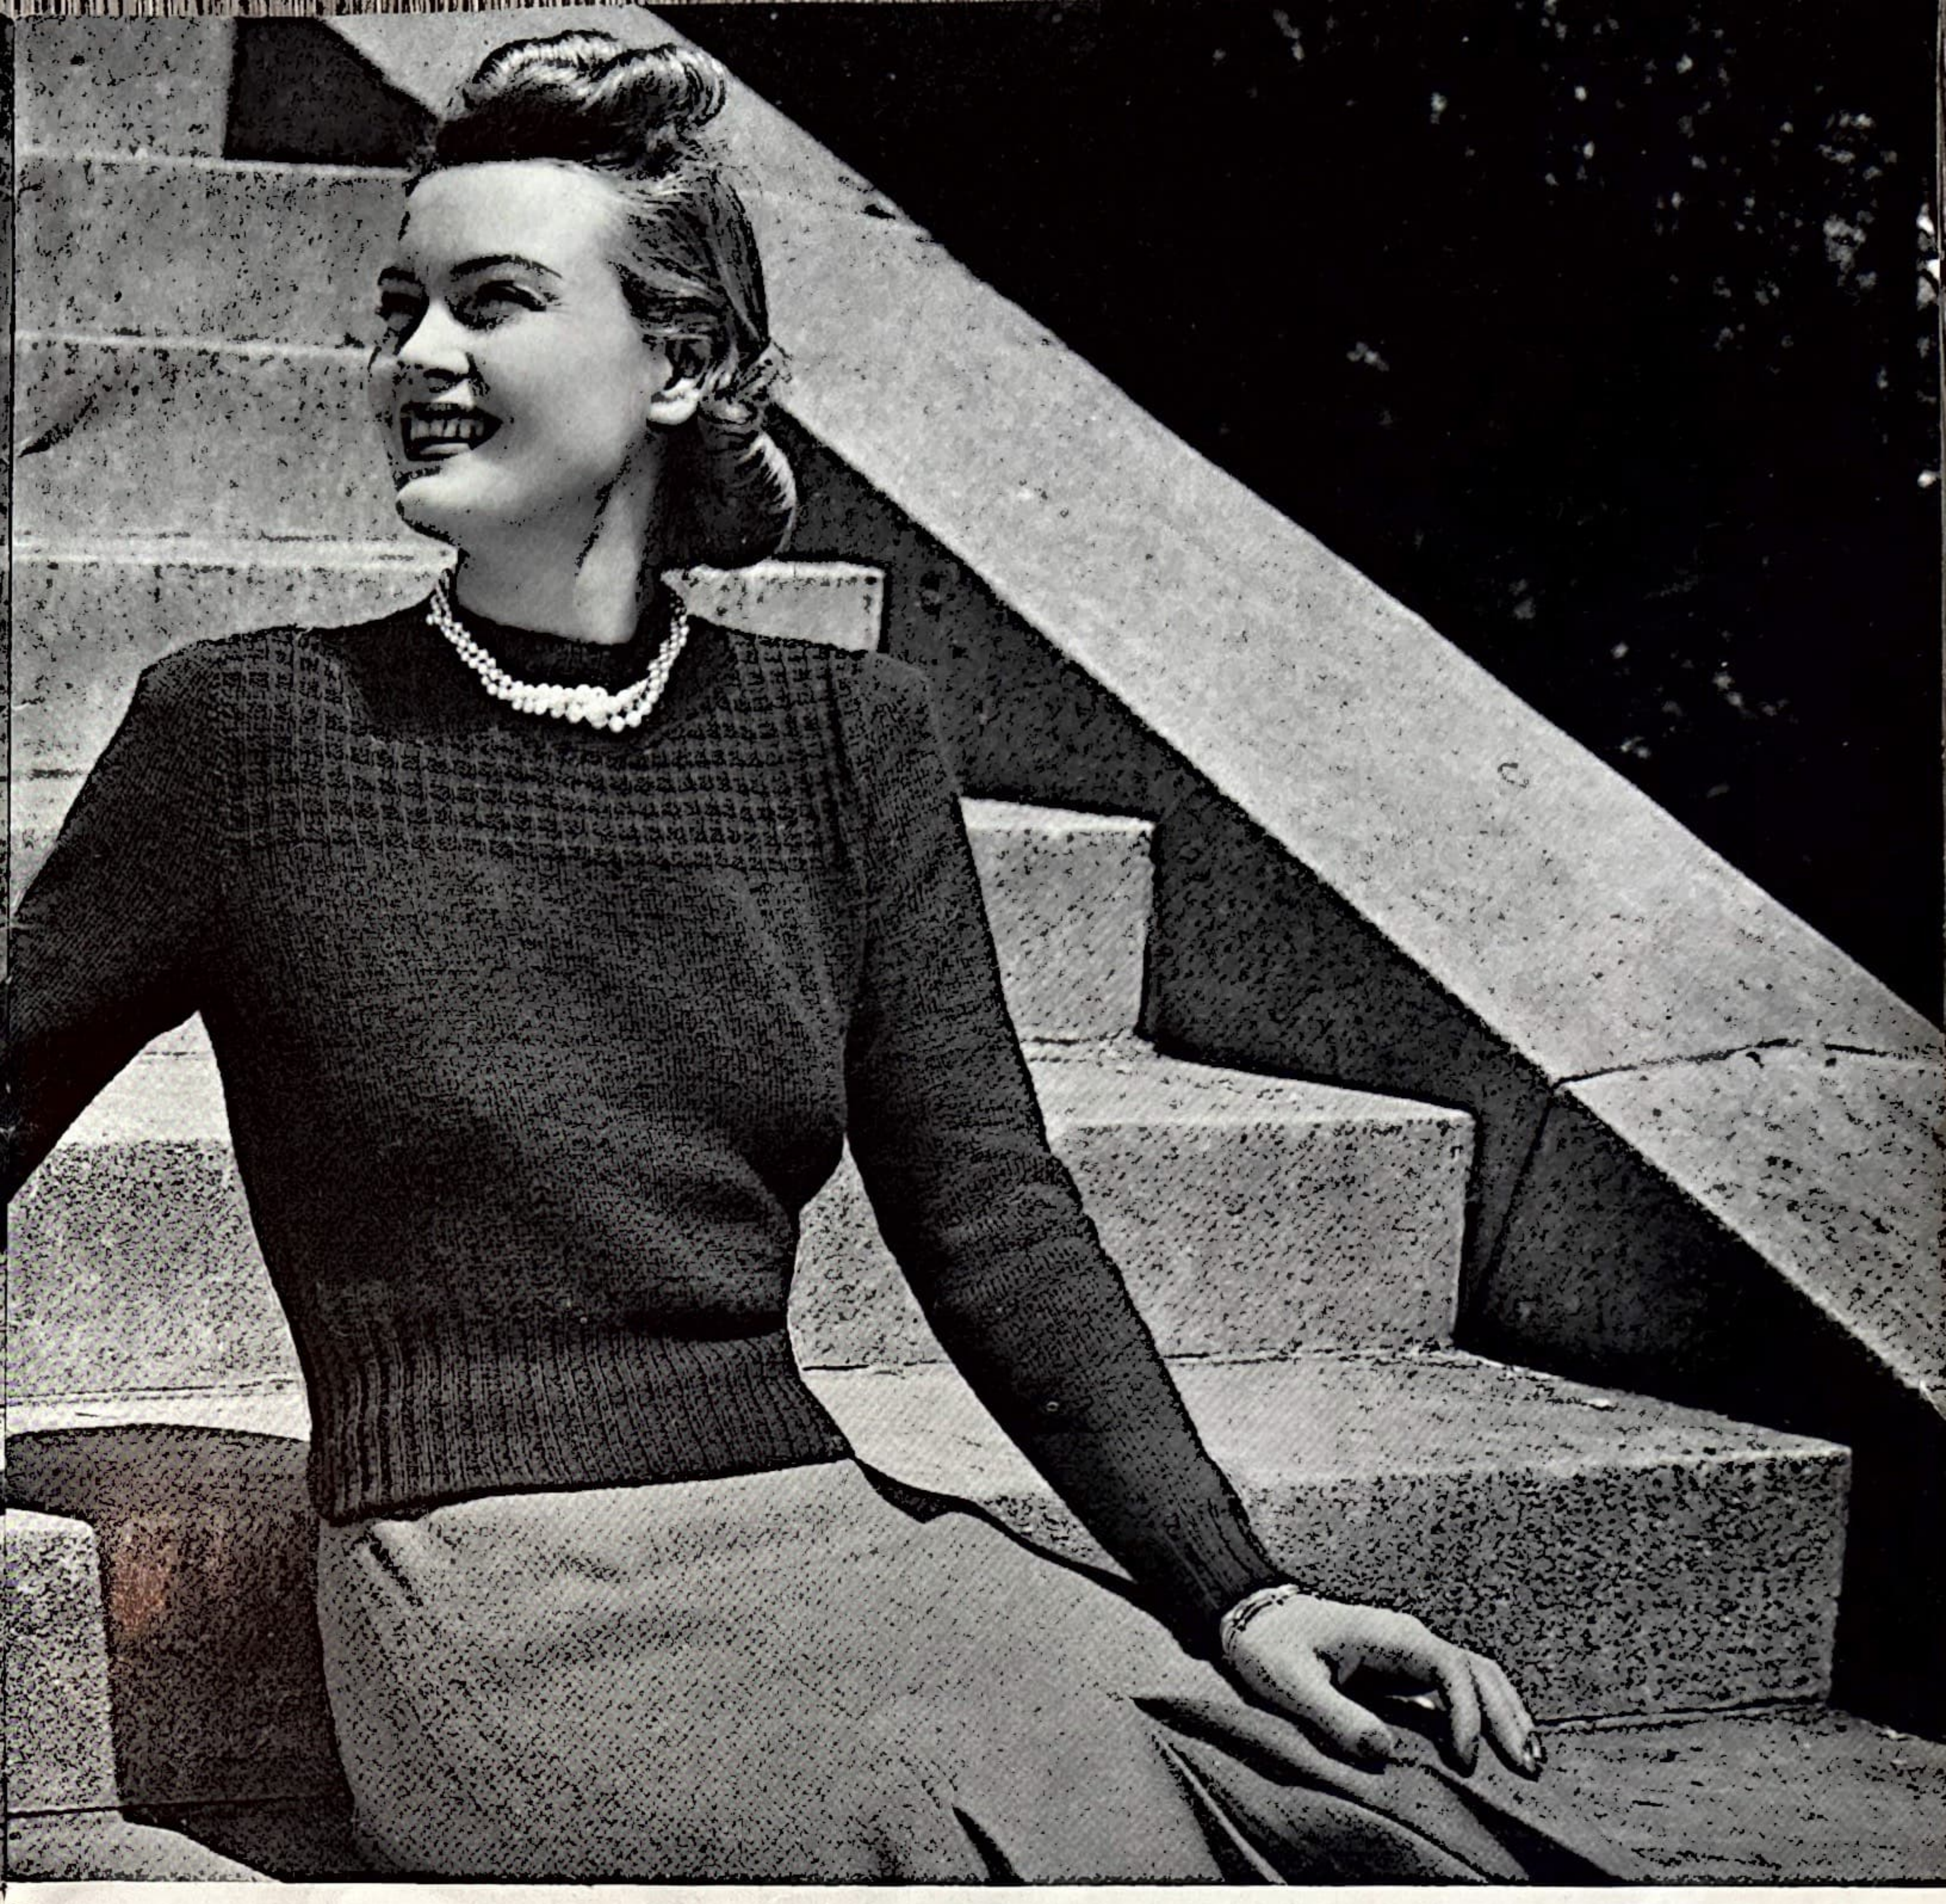

No. 1542

Today hand knit fashions are an integral part of a woman's wardrobe. Choose them for sports, travel or dress occasions and you're certain of sartorial success!

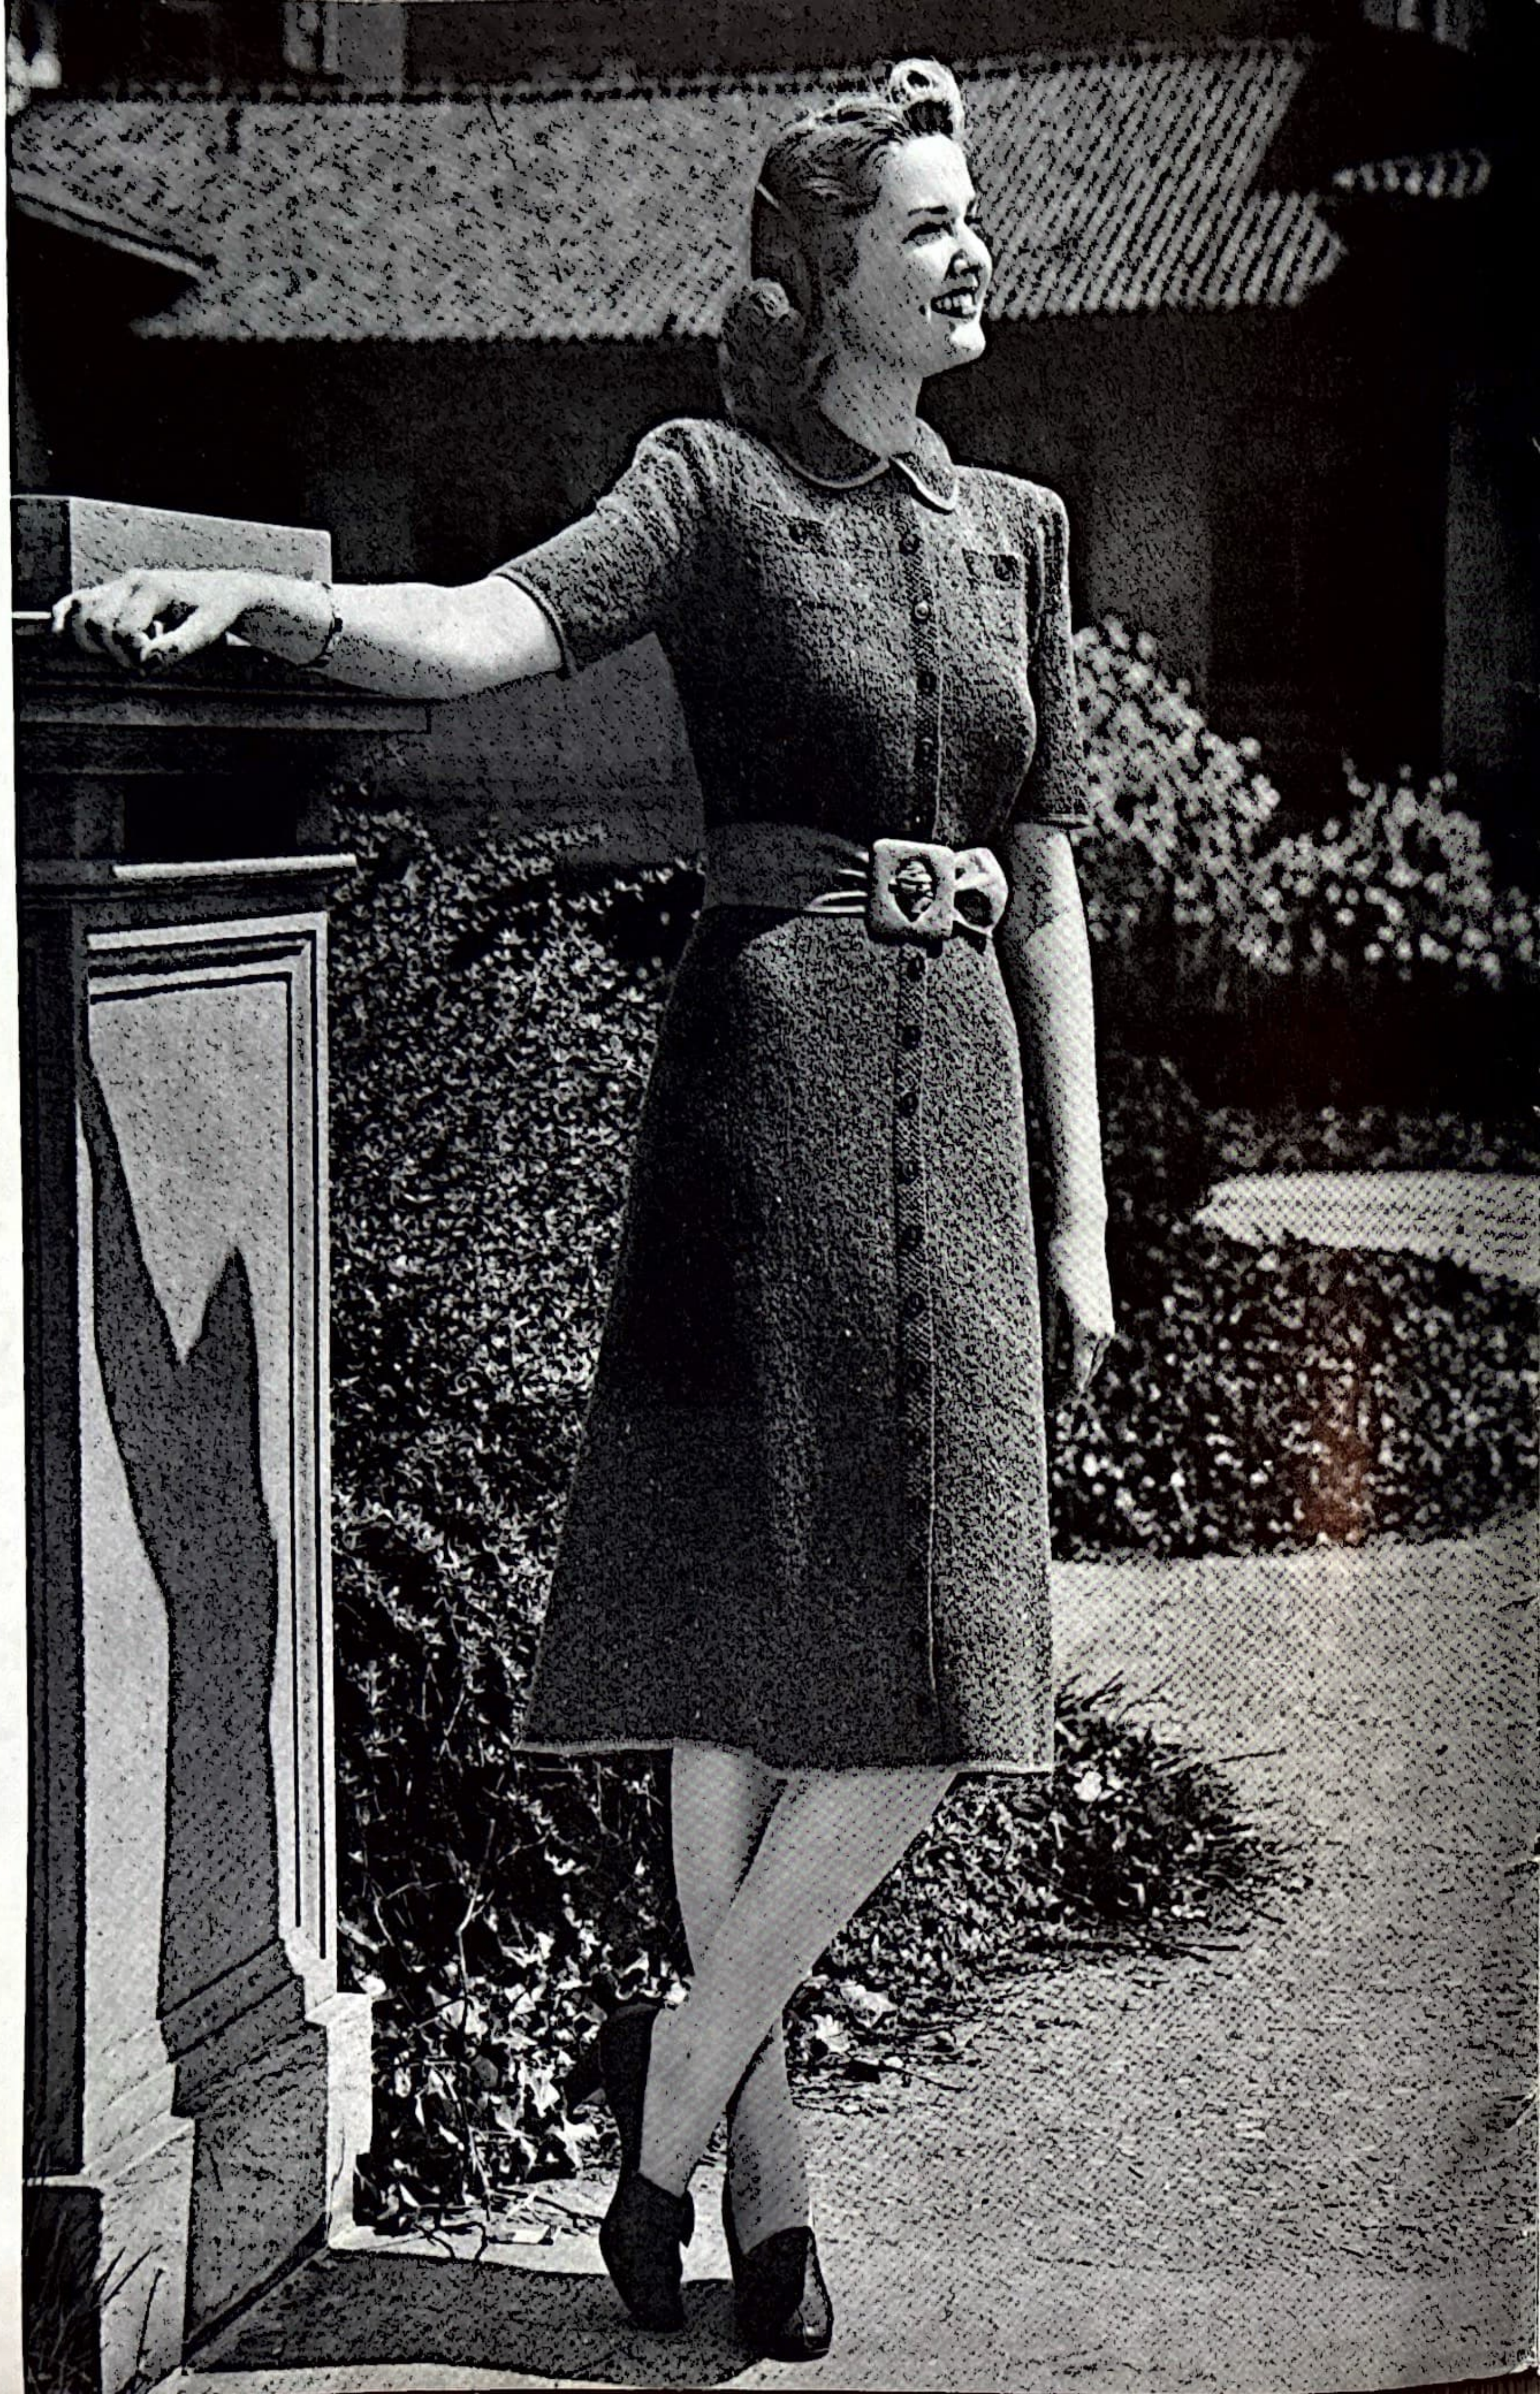

No. 1538

The innocent charm of a
classic dress
knitted of Tweedmoor

Classic Dress No. 1538

Size 16

YARNS — Bear Brand or Bucilla Tweedmoor†, 7 skeins.
Bear Brand or Bucilla Shetland Floss, 1 ball.

NEEDLES—Bucilla Sure-Fit 27-inch Circular Steel, Article 3496, Size 3.
Bucilla Steel Crochet Hook, Article 4300, Size 2.

TRIMMINGS—20 Buttons ⅝ inch diameter.
Leather Belt 2¾ inches wide.

IMPORTANT—Check your gauge first, see page 51.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 49½ inches around.
Hipline (7 inches below Waistline) 36½ inches.
Waistline 28 inches.
Length 28 inches (blocked).

GAUGE: 13 sts = 2 inches 19 rounds = 2 inches

With Tweedmoor, cast on 322 sts for lower edge. Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting. K 5 inches.

First decrease round—* K 21, k 2 tog, repeat from * around (308 sts). K until 8 inches from lower edge.

2nd decrease round — * K 20, k 2 tog, repeat from * around (294 sts).

Continue in this way, decreasing 14 sts in a round every 3 inches 3 times more, having 1 st less between decreases after each successive decrease round.

Work 6th decrease round when skirt measures 20 inches, or 8 inches shorter than desired finished length (238 sts at hipline).

Work a decrease round every 2 inches twice, then every inch twice (182 sts).

K until skirt measures 27 inches. Bind off.

FINISHING—With Shetland Floss and working from right side, work 1 row s c on lower edge of skirt, keeping edge flat; join. Ch 1, turn, work 1 s c in each st of row below; join. Fasten off.

SEED STITCH BAND — With Tweedmoor cast on 7 sts. Work back and forth on circular needle. First row—K 1, * p 1, k 1, repeat from * across row. Repeat first row until band is same length as skirt (27 inches). Bind off.

Steam skirt and band, stretching both to 28 inches in length, see page 51.

Sew band on skirt after finishing waist.

WAIST

MEASUREMENTS FOR FINISHED GARMENT

Width across back at underarm 16½ inches.
Width across back at shoulders 13 inches.
Width across each front at underarm 10 inches.
Length from waistline to underarm 8 inches.
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 5¼ inches.

GAUGE: 13 sts = 2 inches 19 rows = 2 inches

Entire waist is worked back and forth on circular needle.

BACK—With Tweedmoor, cast on 81 sts for lower edge. P 1 row.

Increase row (right side)—K 9, * increase 1 st in next st, k 8; repeat from * to end of row (89 sts).

Work stockinette st (p 1 row, k 1 row), increasing 1 st each side every 6th row 9 times (107 sts).

Work even until 8 inches from lower edge.

Armholes—Bind off 5 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 6 times (85 sts).

Work even until 6½ inches above underarm.

Shoulders—Bind off 4 sts at beginning of each of next 14 rows (28 sts for each shoulder). Bind off remaining 29 sts for back of neck.

POCKET LININGS—With Tweedmoor, cast on 21 sts for lower edge. Work stockinette st for 3 inches, ending with a k row. Break yarn and slip sts to holder. Make 2nd pocket lining in same way.

RIGHT FRONT—Cast on 54 sts for lower edge.

First row (wrong side)—P 47; k 1, p 1, k 1, p 1, k 1, p 1, k 1 (7 sts in seed st border).

2nd row (increase row)—K 1, p 1, k 1, p 1, k 1, p 1, k 1; k 3, * increase 1 st in next st, k 10, repeat from * to end (58 sts).

Work seed st border on 7 sts at front edge (as in first 2 rows) up to neck edge, working remaining sts in stockinette st.

Work 5 rows even, ending at front edge.

Increase 1 st at end of next row and repeat increase at underarm edge on 6th row above first increase (60 sts).

Work 3 rows even, ending at front edge (work should now measure about 1¾ inches from lower edge).

Next (buttonhole) row—Work 2 sts, bind off next 3 sts for buttonhole, work to end of row.

On the following row cast on 3 sts over the bound-off sts.

Repeat buttonhole at front edge every 2 inches (having 18 rows between buttonholes) until there are 6 buttonholes in all, continuing to increase at underarm edge every 6th row until there are 9 increases at underarm edge (67 sts). Work even until same length as back to underarm, ending at underarm edge.

(Continued on Page 39)

The Speedway Sweater
knits up like a flash in downy soft Kwiltee.

Speedway Sweater No. 1545

Size 16

YARNS—Bear Brand or Bucilla Kwiltee†, 6 skeins.

NEEDLES — 1 pair Bucilla 14-inch Cedarwood, Article 3860, Size 13.
Bucilla 6-inch White Crochet Hook, Article 3840, Size 9.

TRIMMINGS—6 Ball Buttons ¾ inch diameter.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT
Width across back at underarm 17½ inches.
Width across back at shoulders 12¾ inches.
Width across each front at underarm 9¾ inches (including band).
Length from lower edge to underarm 11½ inches.
Sleeves—Width below underarm 14 inches.
Length from lower edge to underarm 5¼ inches.

GAUGE: 13 sts=4 inches 5 rows=1 inch

Pattern is a multiple of 4 plus 1.

BACK—Waistband—Cast on 43 sts for lower edge.
First row (right side)—P 1, * k 1, p 1, repeat from * across row.
2nd row—K 1, * p 1, k 1, repeat from * across row. Repeat these 2 rows of ribbing until waistband measures 4 inches, ending on wrong side.
Increase row—Increase 1 st in first st, k 1, p 1, increase 1 st in next st, p 1, * increase 1 st in next st, p 1, k 1, p 1, increase 1 st in next st, p 1, repeat from * 5 times, k 1, p 1 (57 sts).

Ribbed Pattern—First row (wrong side)—K 1, * p 2, k 2, repeat from * across row.
2nd row—P 1, * k 2, p 2, repeat from * across row. Repeat these 2 rows of pattern for remainder of back. Work even until 11½ inches from lower edge, ending on right side.

Armholes—Bind off 3 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 5 times, being careful to keep pattern while decreasing (41 sts).
Work even until 7 inches above underarm.

Shoulders—Bind off 3 sts at beginning of each of next 2 rows, then 5 sts at beginning of each of next 4 rows (13 sts for each shoulder). Bind off remaining 15 sts for back of neck.

RIGHT FRONT—Waistband — Cast on 22 sts for lower edge.
First row (right side)—* K 1, p 1, repeat from * across row. Repeat this row until same number of rows as on back waistband, ending on wrong side.
Increase row—K 1, p 1, k 1, * p 1, increase 1 st in next st, p 1, increase 1 st in next st, p 1, k 1, repeat from * twice more, increase 1 st in last st (29 sts).
Work ribbed pattern as on back for remainder of front. Work even until same number of rows as on back up to underarm, ending on right side.

Armhole—Bind off 3 sts at beginning of next row for underarm.
Decrease 1 st at armhole edge every 2nd row 5 times (21 sts). Work even until 5 inches above underarm, ending on wrong side at front edge.

Neck and Shoulder Shaping—Bind off 3 sts at beginning of next row for neck edge. Keeping armhole edge even, decrease 1 st at neck edge every 2nd row until 7 inches above underarm, ending at armhole edge. Bind off 3 sts at armhole edge once, then 5 sts at armhole edge twice, continuing to decrease at neck edge as before until there are 5 decreases in all, then work even. Fasten off.

LEFT FRONT—Waistband—Cast on 22 sts for lower edge.
First row (right side)—* P 1, k 1, repeat from * across row.
Repeat this row until same number of rows as on right front waistband, ending on wrong side.
Increase row—Increase 1 st in first st, * k 1, p 1, increase 1 st in next st, p 1, increase 1 st in next st, p 1, repeat from * twice more, k 1, p 1, k 1 (29 sts).
Finish to correspond to right front, shaping for underarm and shoulders at beginning of a row worked from the right side and for neck edge at beginning of a row worked from wrong side.

SLEEVES—Cuff—Cast on 33 sts for lower edge. Work ribbing as on back waistband for 1¼ inches, ending on wrong side.
Increase row—Increase 1 st in first st, k 1, * p 1, increase 1 st in next st, p 1, increase 1 st in next st, p 1, k 1, repeat from * 4 times, increase 1 st in last st (45 sts).
Work ribbed pattern as on back for remainder of sleeve.
Work even until 5¼ inches from lower edge.
Bind off 3 sts at beginning of each of next 2 rows for underarm.
Decrease 1 st each side every 2nd row 6 times.
Work even until 4 inches above underarm.
Decrease 1 st each side of next row and repeat decreases every 2nd row twice more.
Bind off 2 sts at beginning of each of next 4 rows.
Bind off remaining 13 sts.
Work other sleeve in same way.

FINISHING—Sew seams. Sew sleeves to armholes, with sleeve seam at center underarm, holding in extra fullness at top.

BUTTON BAND—Join yarn on left front at neck edge. Working from right side, work 50 s c to lower edge (about 3 s c in every 5 rows).
2nd row—Ch 1, turn, work 1 s c in each st of row below. Fasten off.

BUTTONHOLE BAND—Join yarn on right front at lower edge, leaving a 12-inch end. Working from right side, work 50 s c to neck edge.
2nd row—Ch 1, turn, work 1 s c in first st, * ch 2, skip

(*Continued on Page 40*)

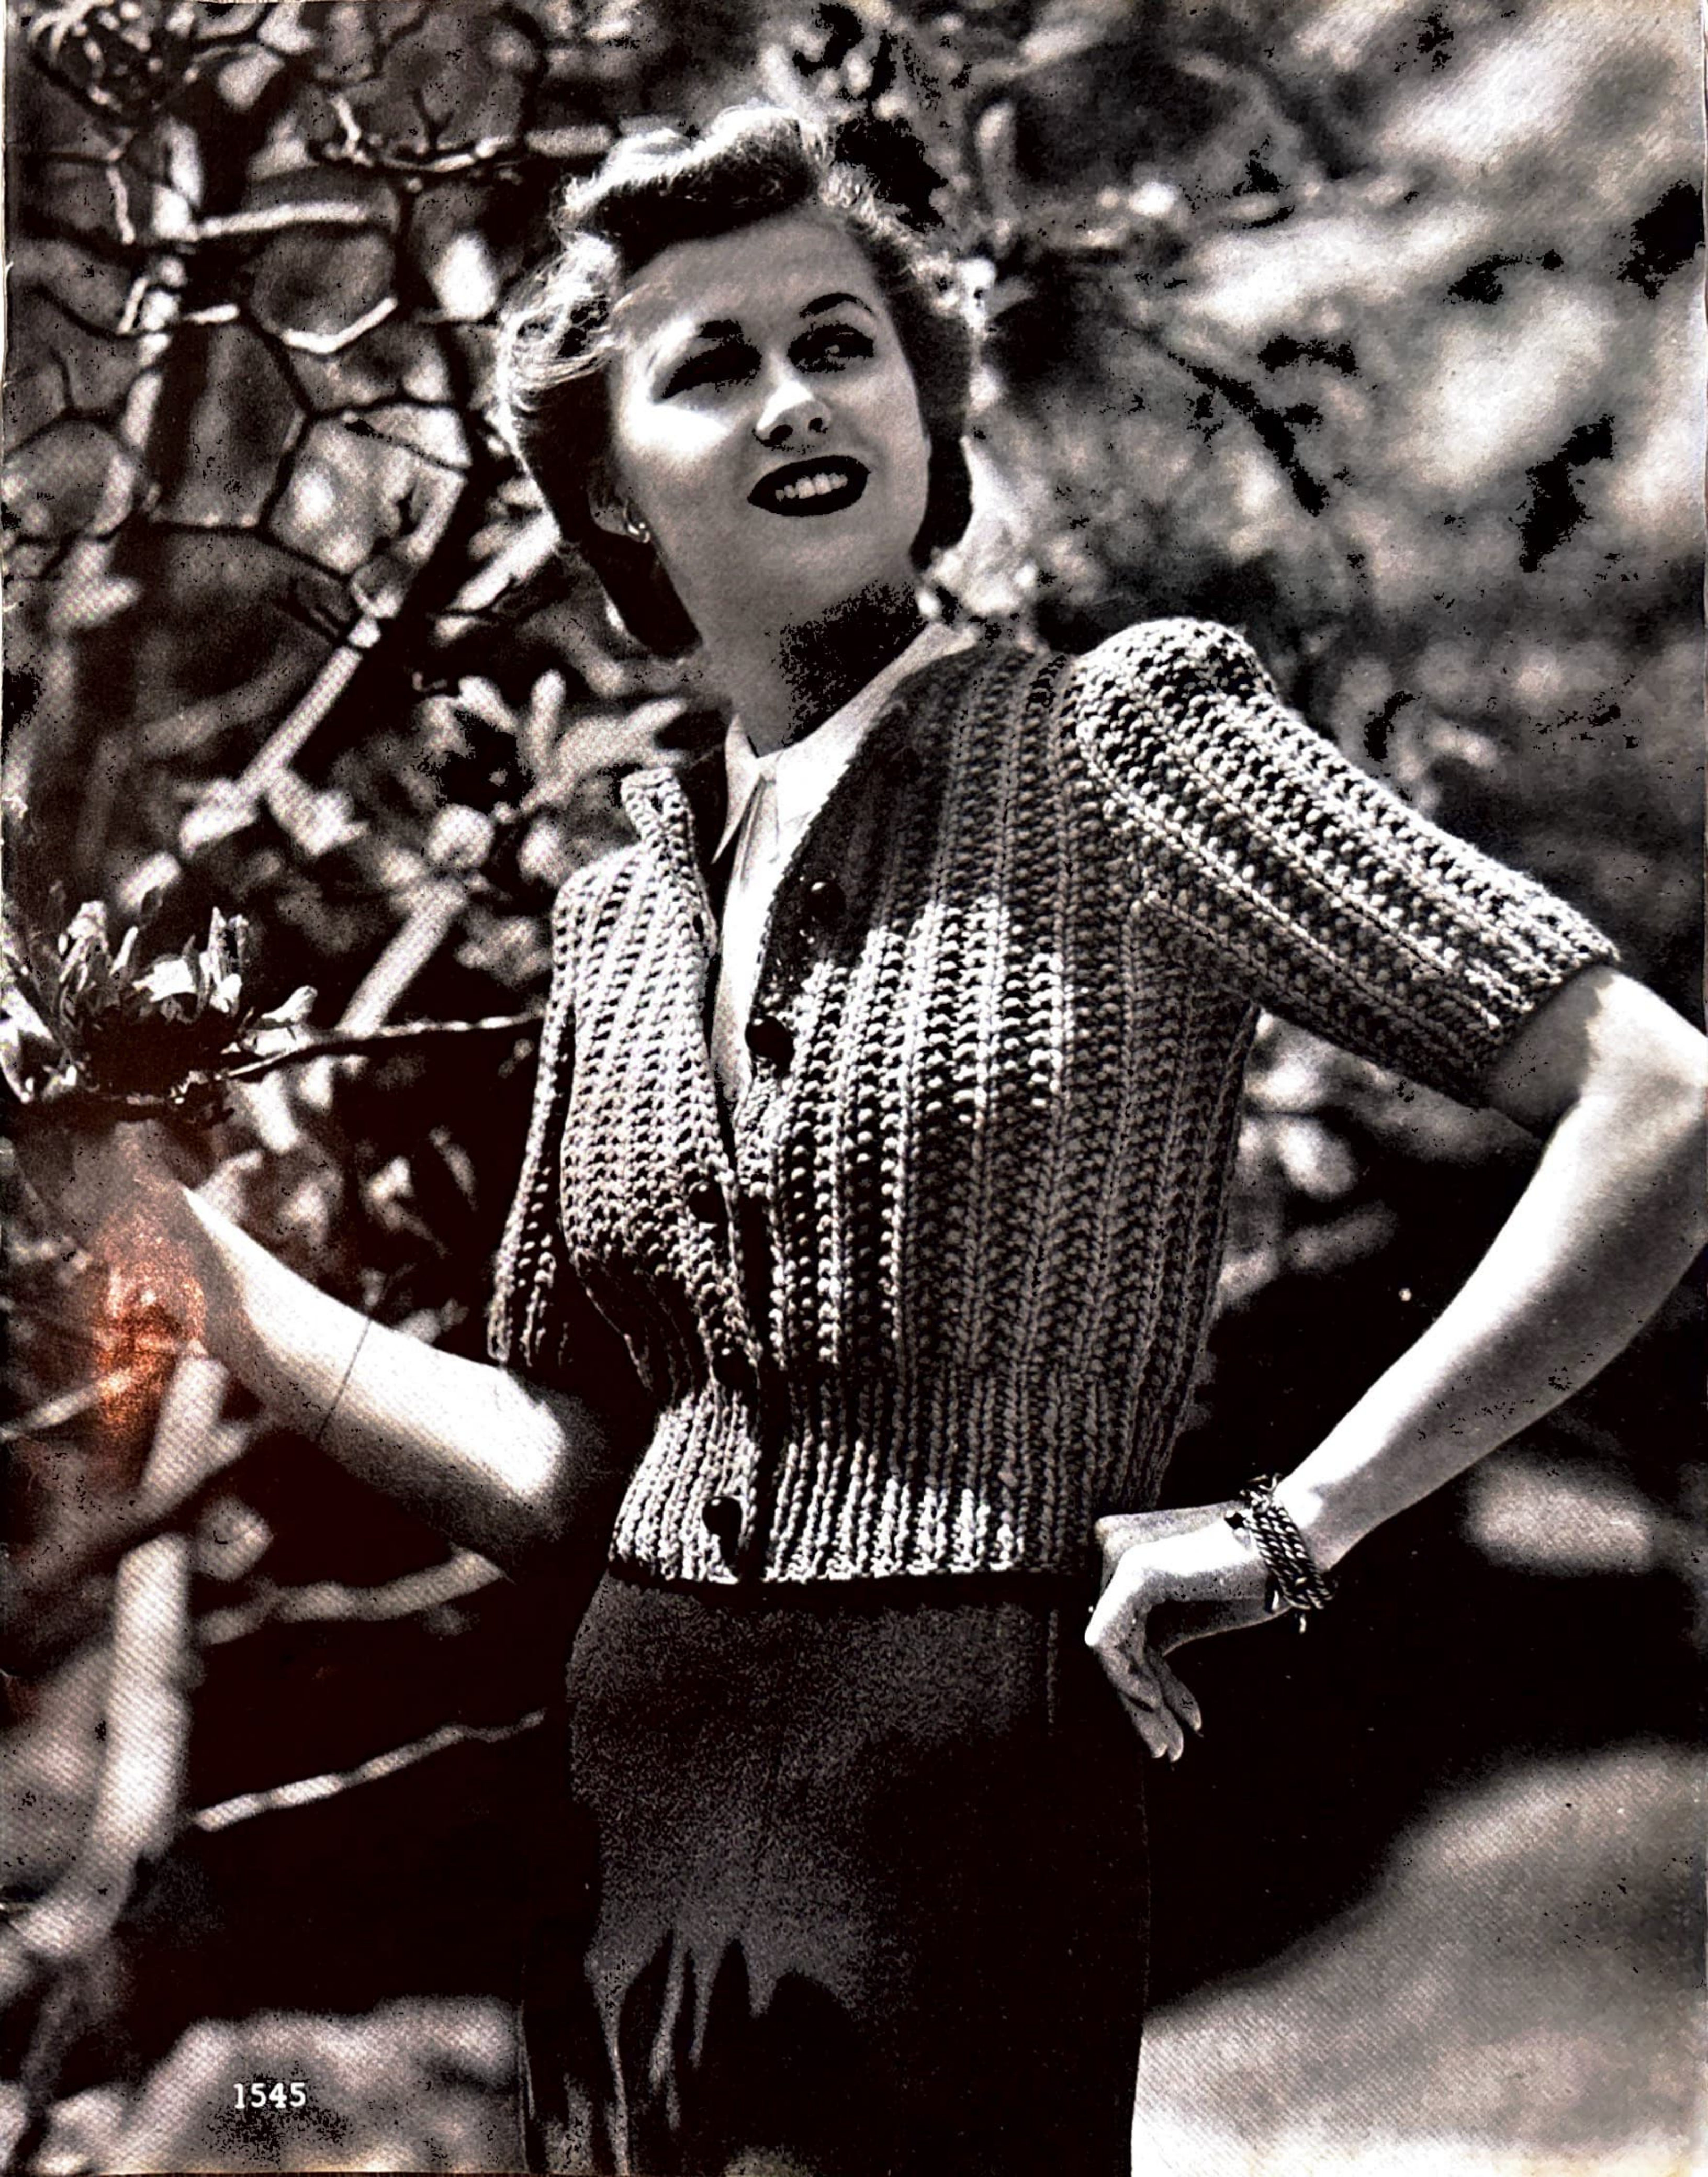

1545

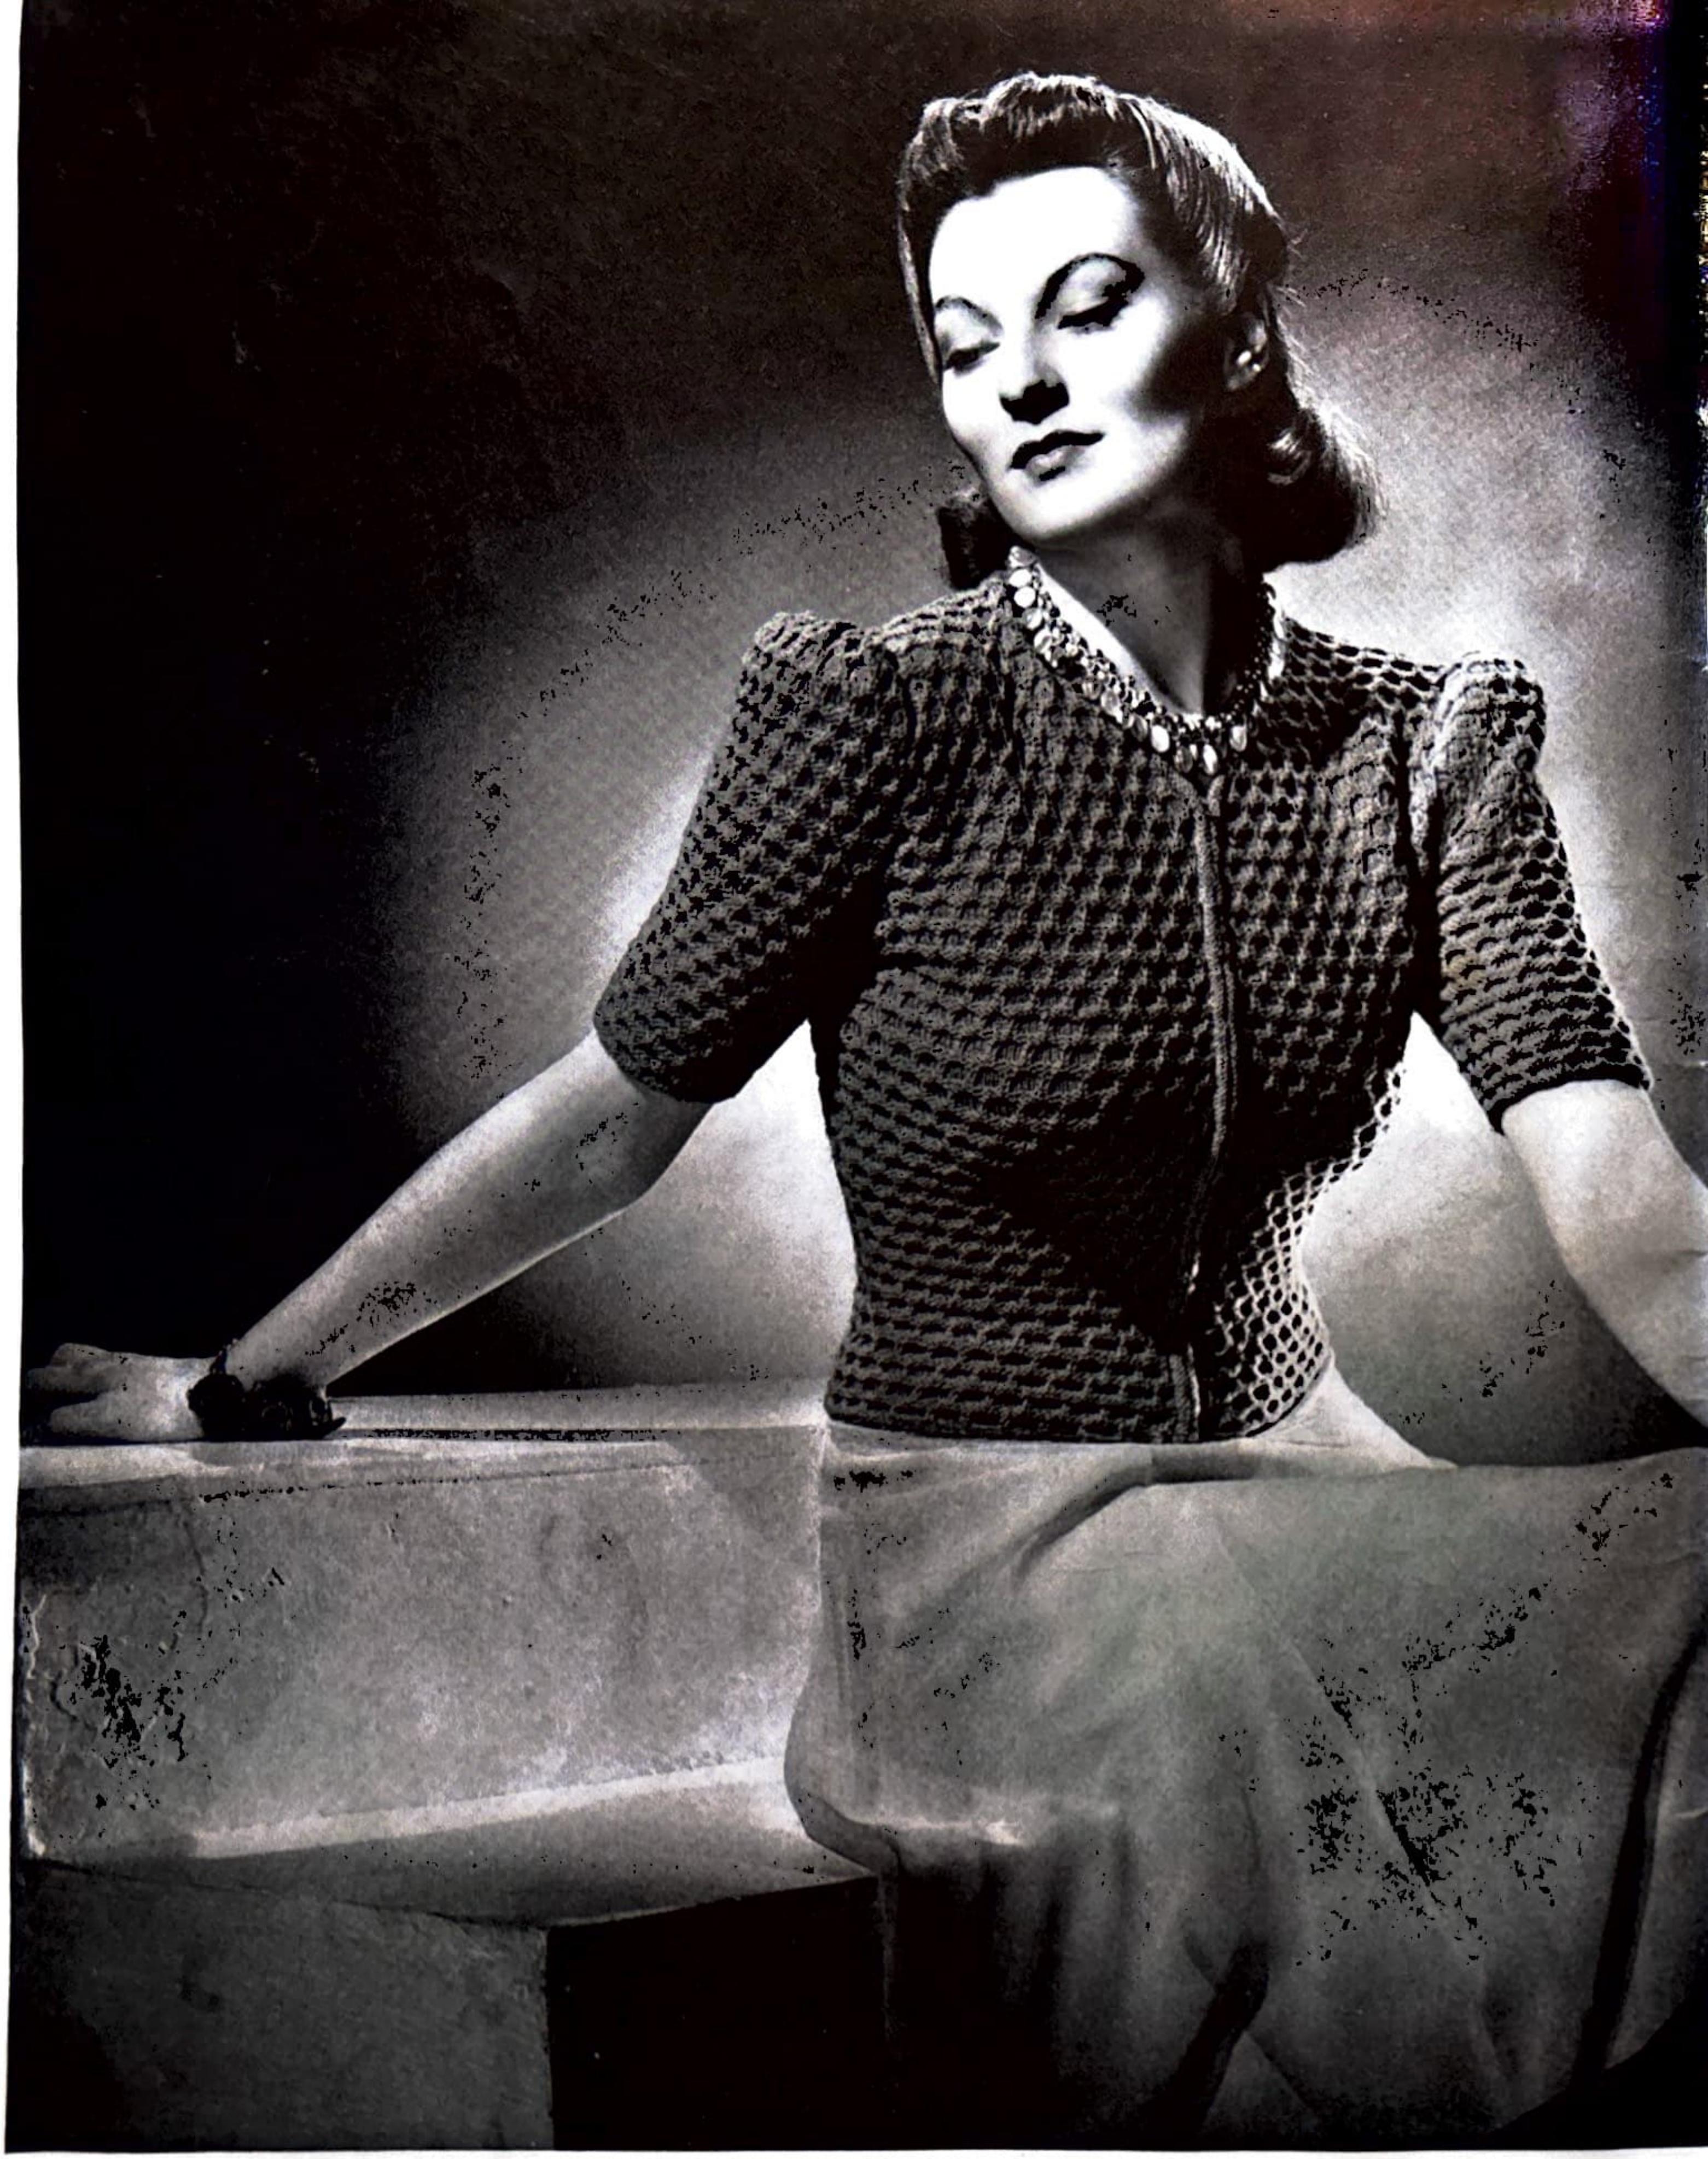

No. 1533

• *Charm your public by day or night in this*

Waffle-knit Cardigan

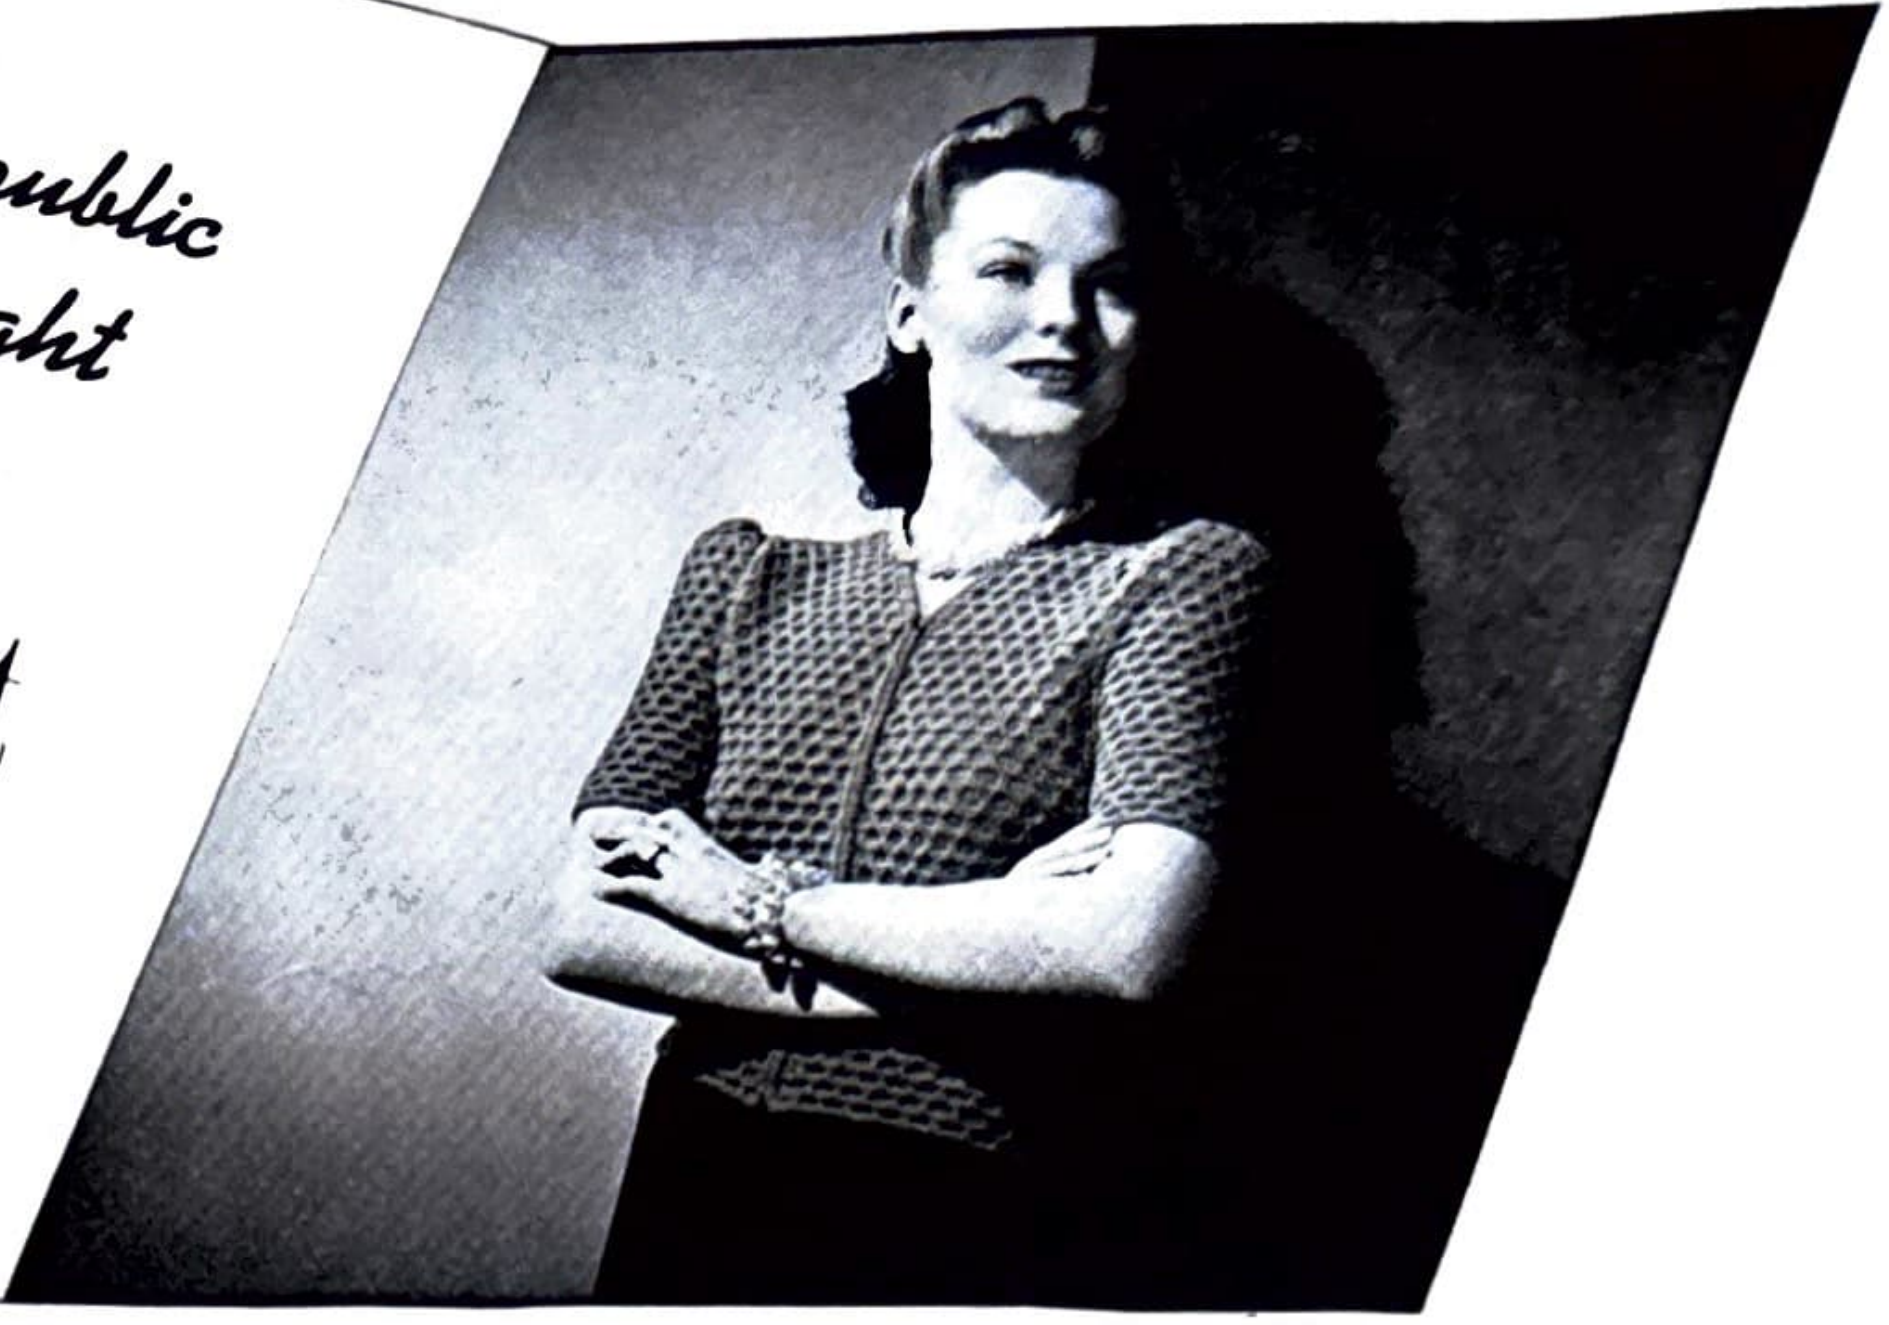

Waffle-Knit Cardigan No. 1533

Size 16

YARNS — Bear Brand or Bucilla Caledonian Zephyr†, 4 balls.

NEEDLES — 1 pair Bucilla 14-inch White, Article 3846, Size 2.
1 pair Bucilla 14-inch Steel, Article 3499, Size 1.

TRIMMINGS—1 Talon Slide Fastener, Style 101, 14 inches long.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT
Width across back at underarm 17 inches.
Width across back at shoulders 13 inches.
Width across each front at underarm 9¼ inches (including border).
Length from lower edge to underarm 11 inches.
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 5 inches.

GAUGE: 9 sts=1 inch 18 rows=1 inch

Pattern is a multiple of 6 plus 4.

BACK—With white needles, cast on 130 sts for lower edge. K 1 row (wrong side).

Pattern—First row (right side)—Purl. **2nd row**—Knit. **3rd row**—Purl (these 3 rows form ridge).
4th row (wrong side)—P 4, * slip next 2 sts as if to p keeping yarn at *front* of work, p 4; repeat from * across row.
5th row—K 4, * slip next 2 sts as if to p keeping yarn at *back* of work, k 4; repeat from * across row.
Repeat 4th and 5th row twice more.
10th row—Knit all sts. **11th row**—Purl.
12th row—Knit (these 3 rows form ridge).
13th row (right side)—K 1, * slip 2 sts keeping yarn at *back* of work, k 4; repeat from *, ending last repeat k 1.
14th row—P 1, * slip 2 sts keeping yarn at *front* of work, p 4; repeat from *, ending last repeat p 1.
Repeat the 13th and 14th row twice more, ending on wrong side with 18th pattern row.
These 18 rows form one complete repeat of pattern. Work pattern in this way for entire jacket.

Decrease 1 st each side of next row and repeat decreases every 18th row twice more (124 sts). Be careful to keep pattern while decreasing and increasing.
Work 2 rows even.
Change to steel needles and work 6 rows even.
Increase 1 st each side of next row and repeat increases every 9th row twice more. Change to white needles.
Repeat increases every 9th row 12 times more (154 sts).
Work even until 11 inches from lower edge, ending on wrong side with 18th pattern row.

Armholes—Bind off 9 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 9 times (118 sts).
Work even until 6¾ inches above underarm, ending on right side with 13th pattern row.

Shoulders—Bind off 6 sts at beginning of each of next 2 rows, then 3 sts at beginning of each of next 22 rows, ending with first pattern row (39 sts for each shoulder).

Neck Border—K 1 row, p 1 row, k 1 row. Bind off remaining 40 sts for back of neck.

RIGHT FRONT—With white needles, cast on 70 sts for lower edge. K 1 row. Work pattern for 18 rows, ending at front edge.
Decrease 1 st at end of next row (underarm edge) and repeat decrease at underarm edge every 18th row twice more (67 sts).
Work 2 rows even.
Change to steel needles and work 6 rows even.
Increase 1 st at beginning of next row at underarm edge and repeat increase at underarm edge every 9th row twice more. Change to white needles.
Repeat increase at underarm edge every 9th row 12 times more (82 sts).
Work even until same number of patterns as on back up to underarm, ending at underarm edge with first pattern row.

Armhole—Bind off 9 sts at beginning of next row for underarm. Keeping front edge even, decrease 1 st at armhole edge every 2nd row 9 times (64 sts). Work even until 3 inches above underarm, ending at front edge with 2nd pattern row.
Decrease 1 st at beginning of next row for neck edge. Repeat decrease at neck edge every 3rd row, keeping armhole edge even until same number of rows as on back up to shoulder, ending at armhole edge with 13th pattern row.

(Continued on Page 40)

Mystery of darkness in suave chenille

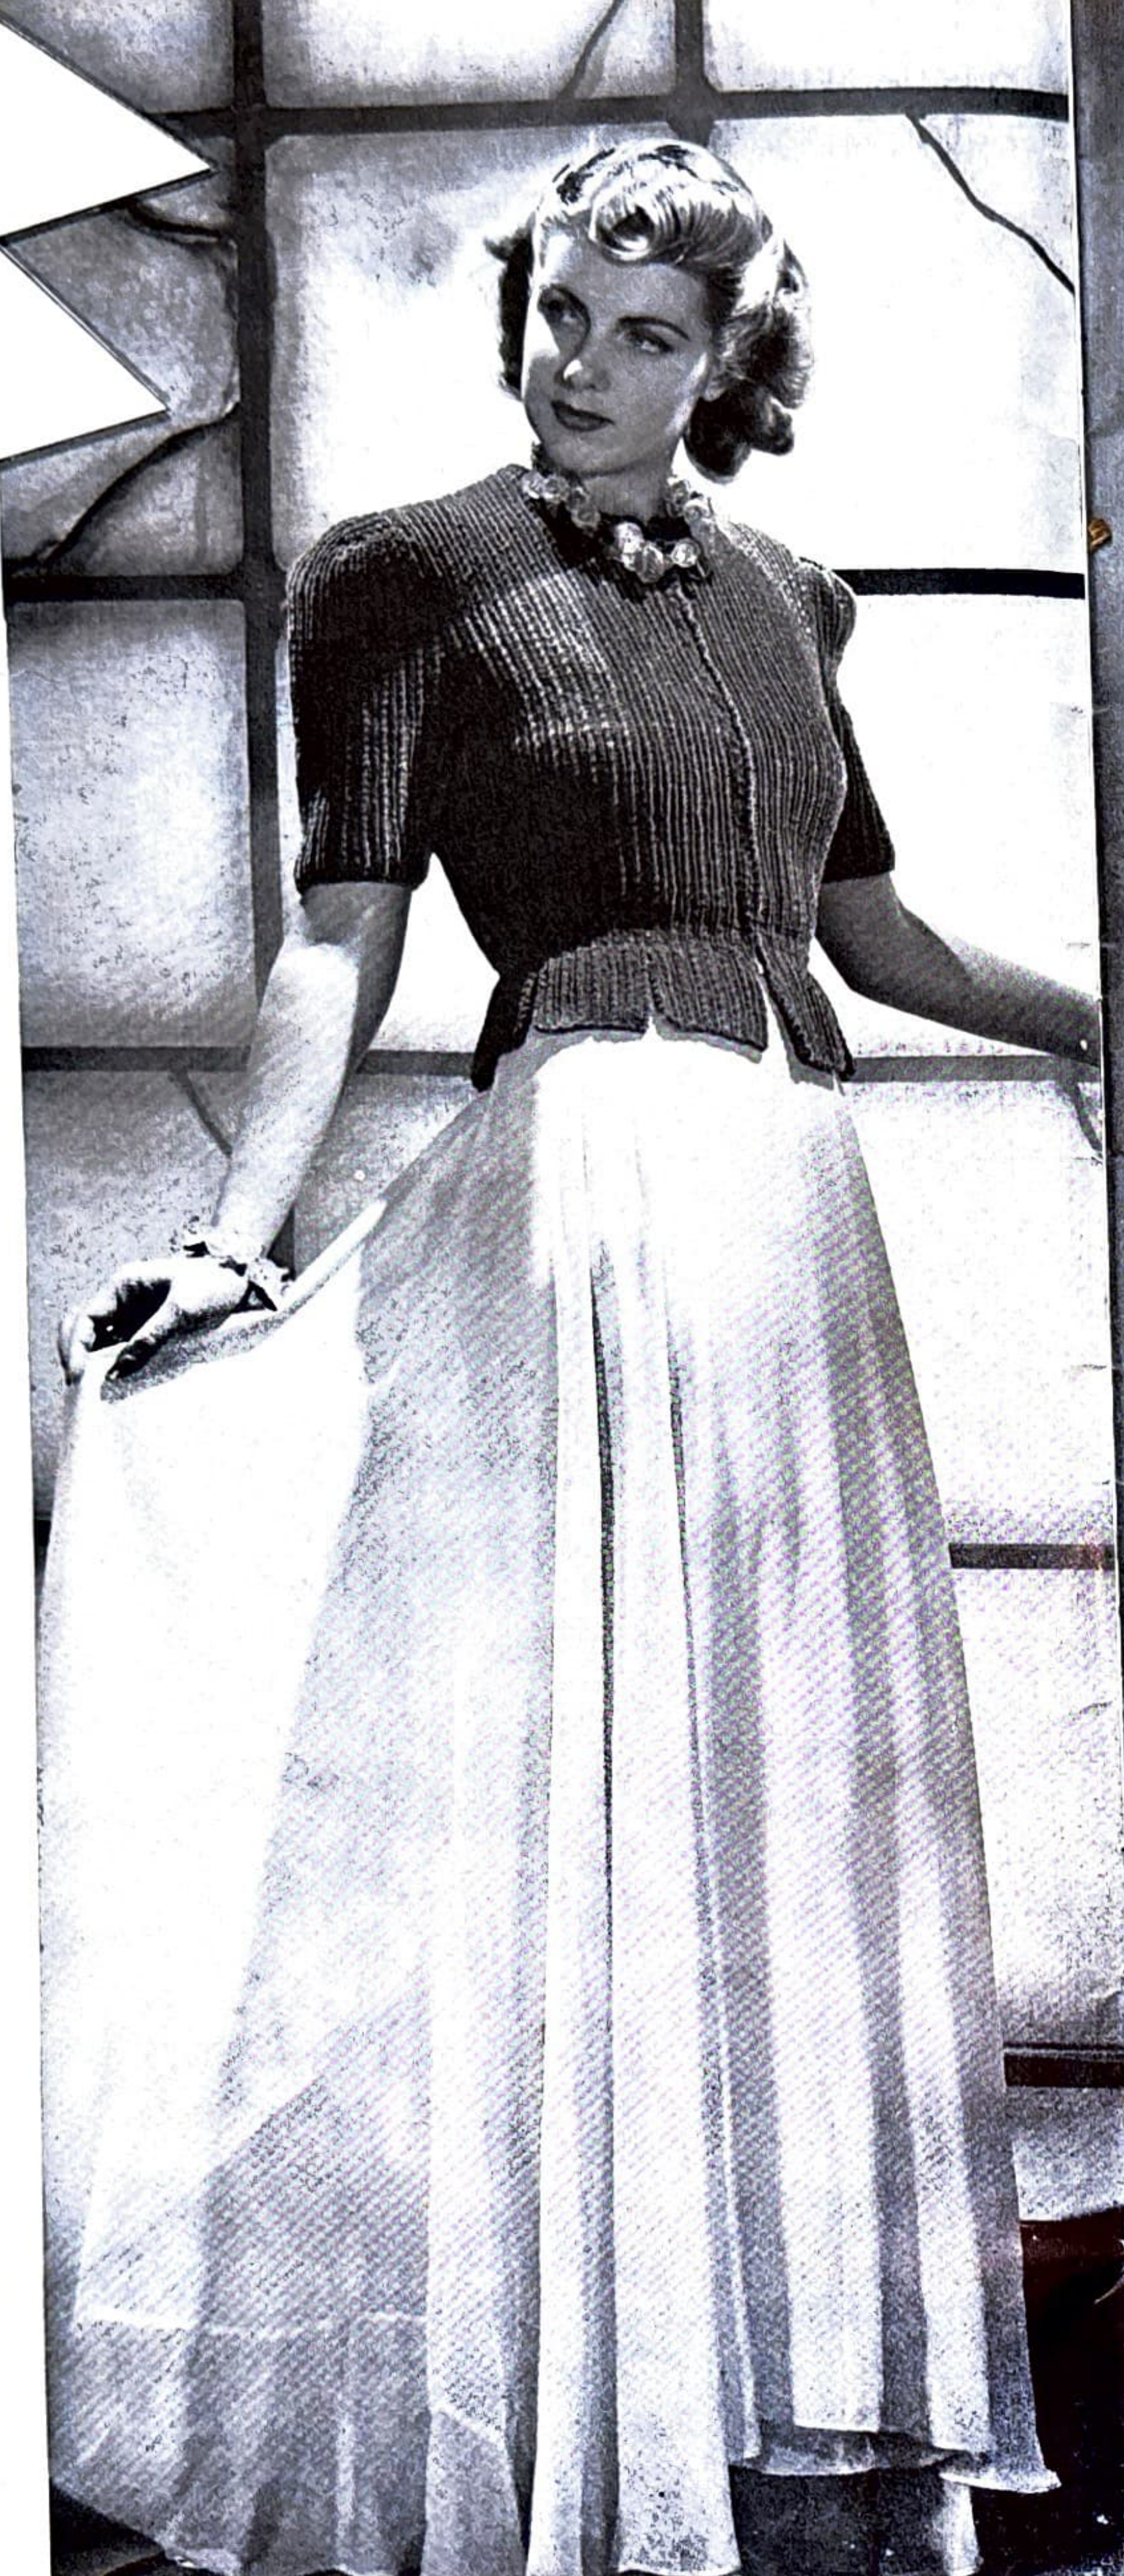

Hooded Domino No. 1543

Size 16

YARNS — Bucilla Water Repellent Chenille, 20 skeins (Jacket 15 skeins; Hood 5 skeins).
Hiawatha Elastic Sewing Thread of "Lastex," 1 spool.

NEEDLES—Bucilla Sure-Fit 27-inch Circular Steel, Article 3496, Size 5.
1 pair Bucilla 14-inch Steel, Article 3499, Size 8 (for Hood).
Bucilla Steel Crochet Hook, Article 4300, Size 00.

TRIMMINGS—1 Talon Slide Fastener, Style 101, 14 inches long for Jacket.
1 Button ½ inch diameter for Hood.

IMPORTANT—Check your gauge first, see page 51.

JACKET

MEASUREMENTS FOR FINISHED GARMENT

Bust 35¼ inches.
Width across back at underarm 16¾ inches.
Width across back at shoulders 13 inches.
Length from lower edge of tabs to underarm 11 inches.
Sleeves—Width below underarm 12¼ inches.
Length from lower edge to underarm 4¾ inches.

GAUGE: 9 sts=2 inches 7 rows=1 inch

NOTE: Entire jacket is worked back and forth on circular needle in ribbing. Nine tabs at lower edge are worked separately and joined at waistline.

TABS—Cast on 15 sts for lower edge of tab.
First row (right side)—P 1, * k 1, p 1, repeat from * across row.
2nd row—K 1, * p 1, k 1, repeat from * across row.
Repeat these 2 rows of ribbing until tab measures 2½ inches from lower edge, ending on wrong side. Break yarn and slip sts on holder.
Make 8 more tabs in same way. Do not break yarn at end of 9th tab; leave on needle, holding right side toward you. Slip 8 tabs onto other end of needle, with right side of each tab toward you.

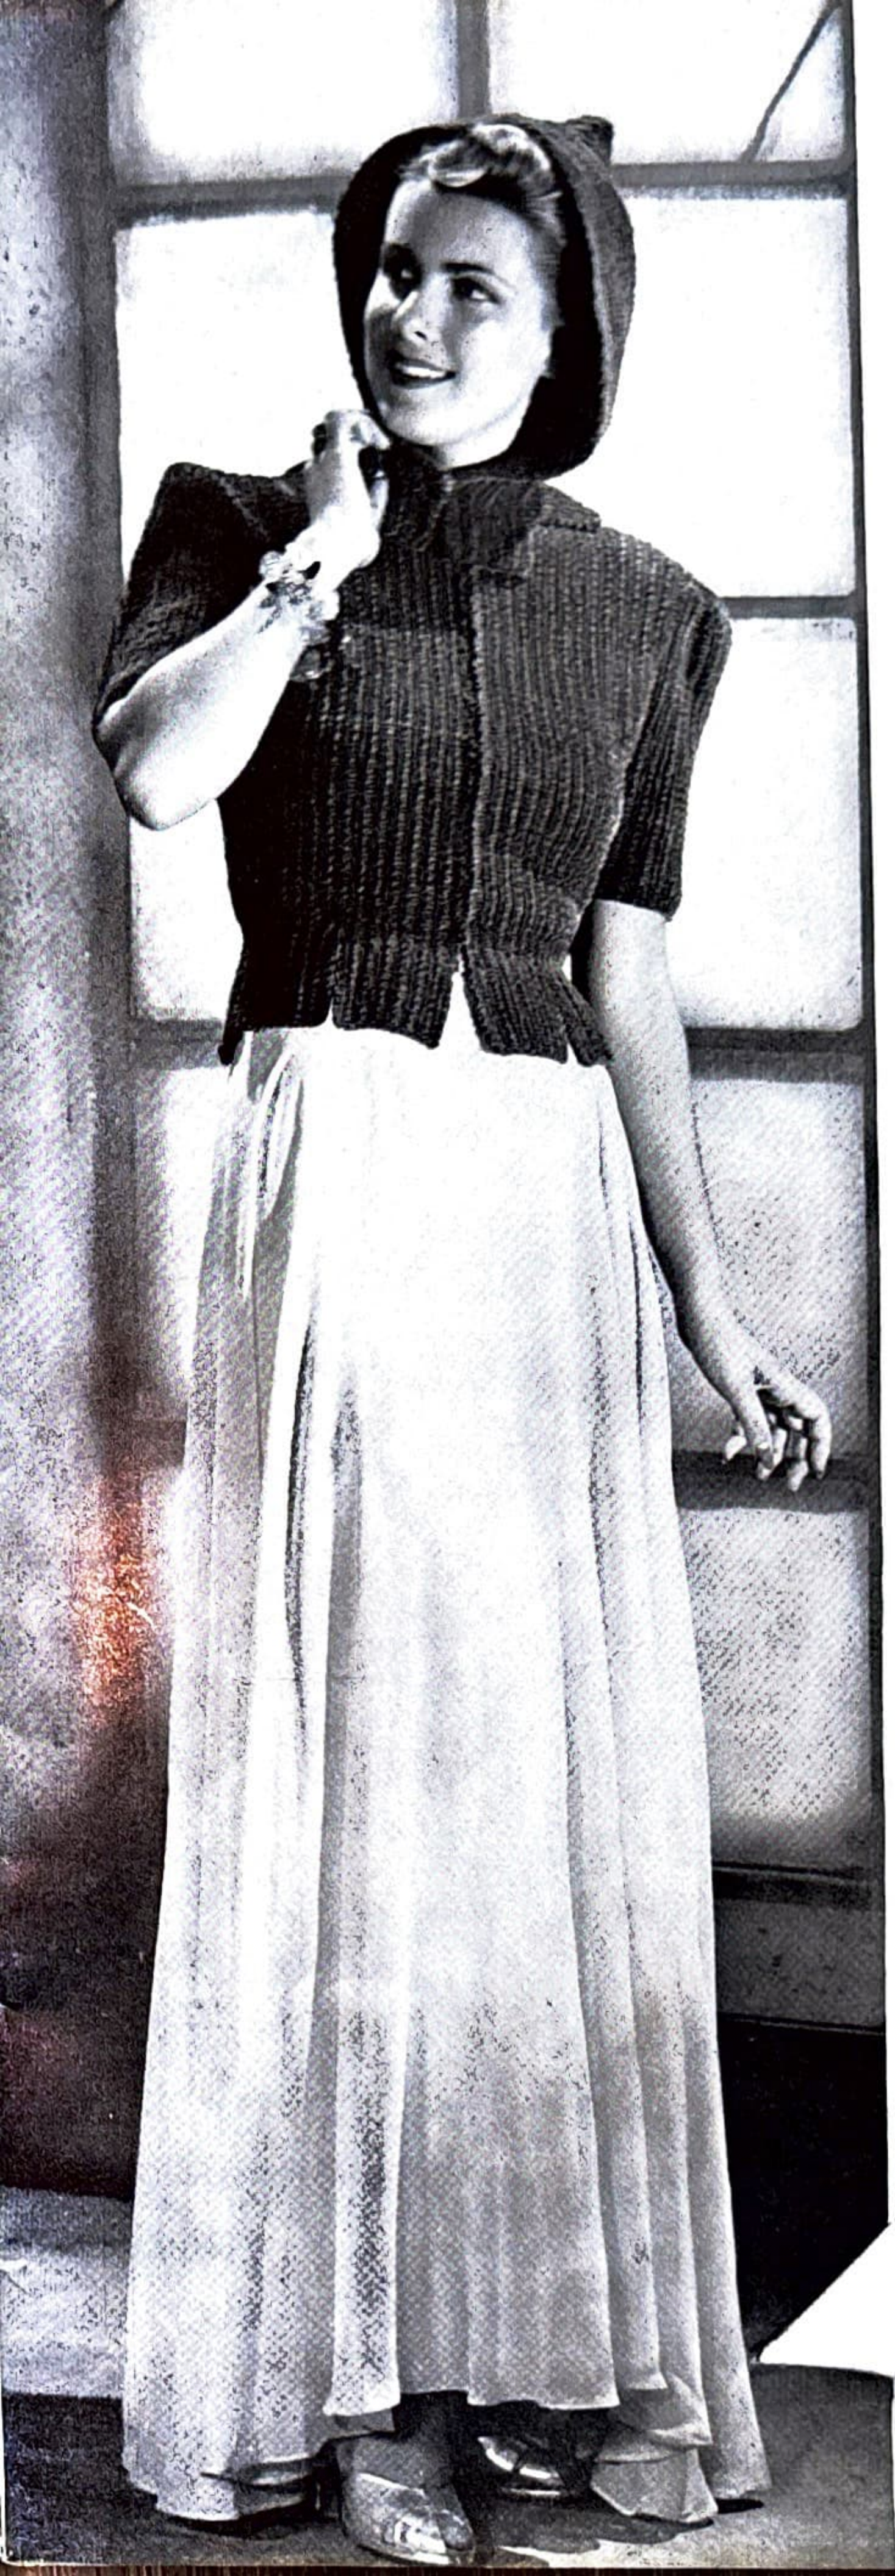

Work across 9 tabs as follows: Work 14 sts of 9th tab, * p 2 tog (last st of 9th tab and first st of next tab), work 13 sts, repeat from *, ending last repeat, work 14 sts of last tab (127 sts).

Work even in ribbing for 11 rows.

First increase row—Work 35 sts, * cast on 1 st on right end of needle, k 1 (underarm seam st), cast on 1 st *, work 55 sts, repeat between *'s once, work 35 sts (131 sts).

Next row—Work 35 sts, p 3, work 55 sts, p 3, work 35 sts.

Next row—Work 35 sts, k 3, work 55 sts, k 3, work 35 sts.

Work ribbing as in these 2 rows for 3 rows more.

2nd increase row—Work 36 sts, repeat between *'s of first increase row once, work 57 sts, repeat between *'s once more, work 36 sts (135 sts).

Next row—K 1, * p 1, k 1, repeat from * across row. Continue in this way to increase 1 st each side of each underarm seam st every 6th row twice more, then every 4th row 4 times (159 sts). Work even until 11 inches from lower edge of tabs, ending on right side.

Next row—Work 37 sts and slip on holder for left front; bind off 9 sts for left underarm; work until 67 sts on needle and slip on holder for back; bind off 9 sts for right underarm, work across remaining sts for right front.

Right Front Armhole and Neck Shaping—Keeping front edge even, decrease 1 st at armhole edge every 2nd row 6 times (31 sts).

Work even until 5¼ inches above underarm, ending at front edge.

Bind off 5 sts at beginning of next row for neck edge. Decrease 1 st at neck edge every 2nd row, keeping armhole edge even until 6¾ inches above underarm, ending at armhole edge.

Shoulder—Bind off 3 sts at beginning of next row (knitting the k sts and purling the p sts), then bind off 4 sts at armhole edge every 2nd row 4 times, continuing to decrease at neck edge as before, until there are 7 decreases in all, then work even (19 sts bound off for shoulder). Fasten off.

Left Front Armhole and Neck Shaping—Take up 37 sts of left front from holder. Join yarn at underarm

(*Continued on Page* 41)

No. 1543

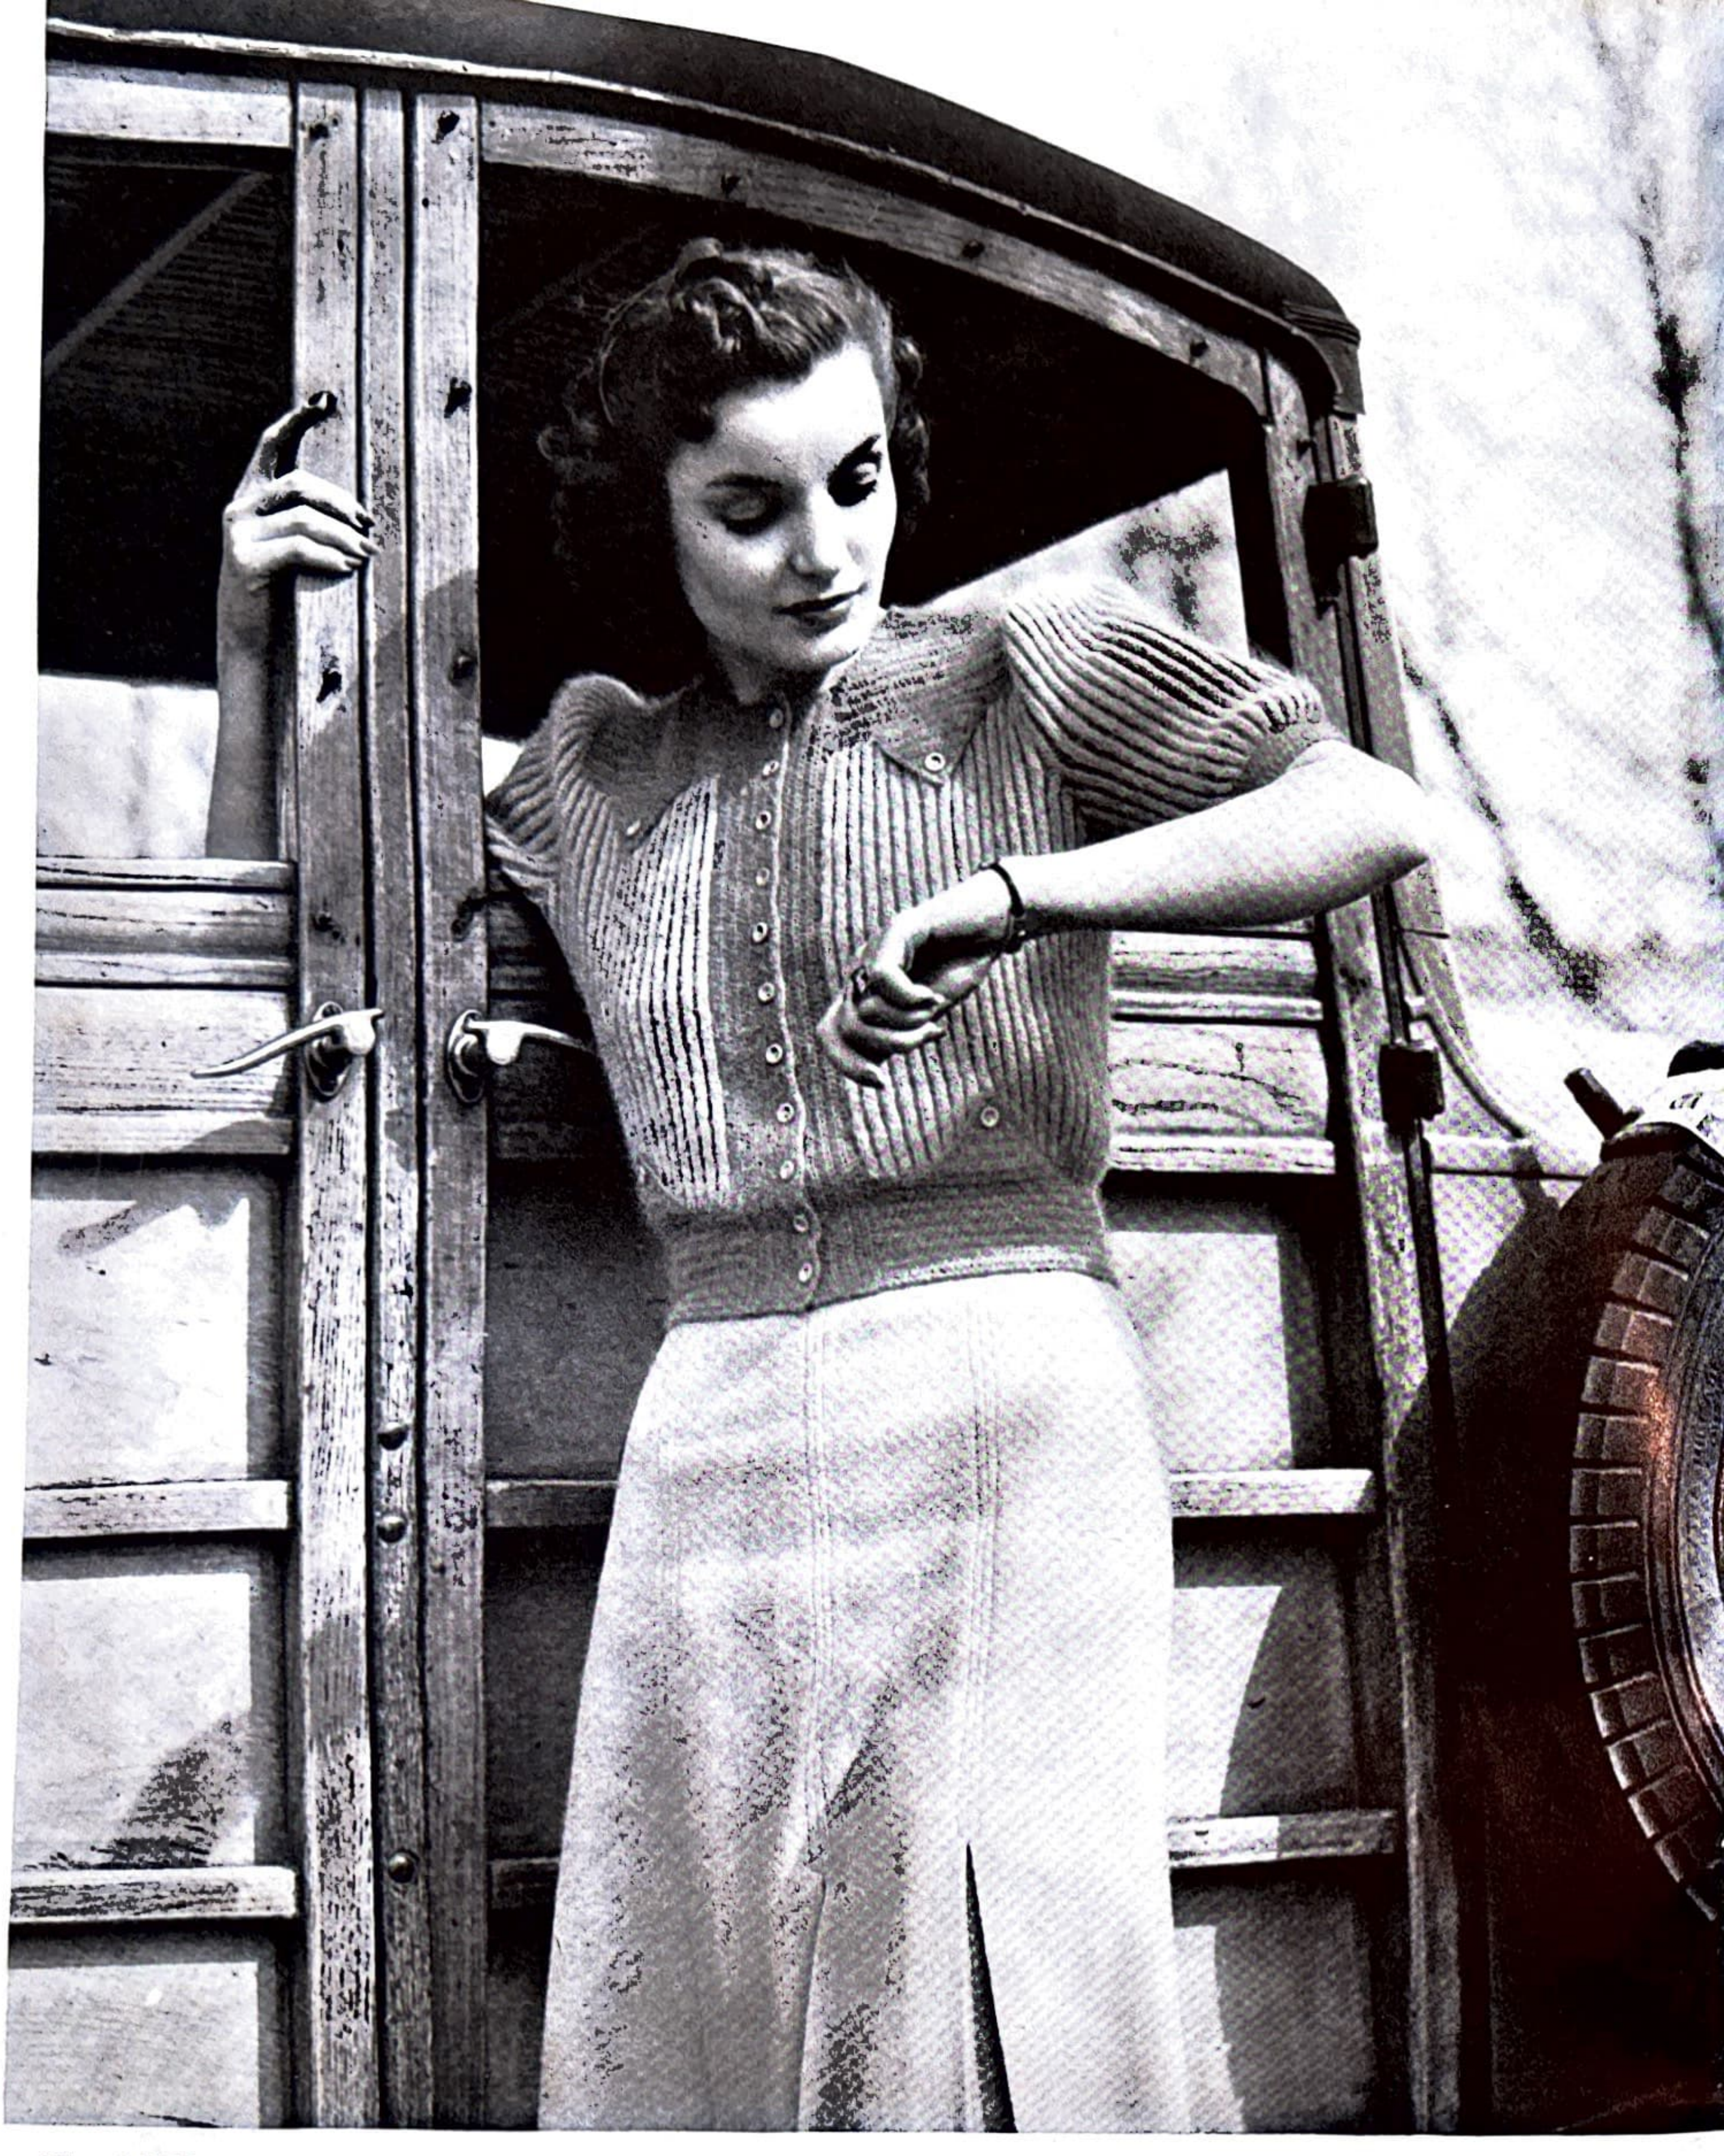

No. 1535

Duotone Cardigan No. 1535

Size 16

YARNS—Bear Brand or Bucilla Sport Angora, 5 balls of each of two Contrasting Colors.

NEEDLES—1 pair Bucilla 14-inch White, Article 3846, Size 2.
Bucilla 6-inch White Crochet Hook, Article 3840, Size 3.
Bucilla Steel Crochet Hook, Article 4300, Size 2.

TRIMMINGS—15 Buttons ½ inch diameter.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT
(with sweater ribbed in)

Width across back at underarm 17 inches.
Width across back at shoulders 13 inches.
Width across each front at underarm 9½ inches (including border).
Length from lower edge of waistband to underarm 11¼ inches.
Sleeves—Width below underarm 12 inches.
Length from lower edge of cuff to underarm 5 inches.

GAUGE:

Quaker St—8 sts=1 inch	18 rows=1 inch
H D C — 6 sts=1 inch	5 rows=1 inch

Sweater is worked lengthwise in "Quaker St", forming ribs which are held in by crochet yoke and waistband. Wide Quaker St ribs are of main color; yoke and narrow stripes between ribs are of contrasting color.

BODY—Left Front—With contrasting color, cast on 88 sts for front edge. P 1 row. Join main color.

Pattern—First row (right side)—With main color, knit.
2nd row—With main color, knit.
3rd row—With main color, purl.
4th row—With main color, knit (always carry yarn not in use loosely along edge of work).
5th row (right side)—With contrasting color, knit.
6th row—With contrasting color, purl.
Repeat these 6 rows of pattern for entire body of sweater.
Work even until work measures 5½ inches from left front edge (ribbed in), ending with 5th pattern row at top edge (there should be 16 main color ribs).

Left Armhole Section—*Bind off 15 sts at beginning of row for armhole edge. Decrease 1 st at armhole edge every 2nd row 9 times, keeping lower edge even (64 sts).
Work 34 rows even for underarm.
Increase 1 st at end of next row at armhole edge and repeat increase every 2nd row 8 times more (73 sts).
Work 1 row even, ending at lower edge with 4th pattern row.

Work 5th pattern row, casting on 15 sts at end of row for armhole edge (88 sts).*

Back —Work even until back measures 13 inches (ribbed in) from armhole edge, ending with 5th pattern row at top edge (there should be 39 main color ribs from armhole edge of left side of back).

Right Armhole Section—Repeat between *'s of left armhole section once (88 sts).

Right Front—Work even until same number of ribs as on left front, ending with 5th pattern row. Bind off with contrasting color.

SLEEVES—With contrasting color, cast on 32 sts. P 1 row.
Work pattern as on front for 14 rows for underarm, ending with 2nd pattern row at lower edge of sleeve.
Increase 1 st at end of next row (armhole edge) and repeat increase every 2nd row 7 times more (40 sts).
Work 1 row even, ending at lower edge with 6th pattern row.
Work first pattern row with main color and cast on 28 sts for edge of top of sleeve (68 sts).
Work 2 rows even.
Increase 1 st at beginning of next row and repeat increase at top of sleeve every 4th row 3 times more, ending with 4th pattern row (72 sts).
Work even until top edge measures 6¾ inches (ribbed in) from last increase, ending with 6th pattern row at lower edge (there should be 20 main color ribs even at top edge—28 main color ribs from beginning). Decrease 1 st at end of next row and repeat decrease every 4th row 3 times more.
Work 2 rows even, ending with 3rd pattern row.
Bind off 28 sts at beginning of next row, work across row.
Decrease 1 st at top edge every 2nd row 8 times, keeping lower edge even (32 sts).
Work 15 rows even, ending with 5th pattern row. Bind off with contrasting color (36 main color ribs).
Work other sleeve in same way.
Note: All crocheted parts of garment are worked with contrasting color.

BACK YOKE—**First row**—Join yarn on top edge of back at corner of right armhole edge. Working from right side with steel hook, ch 1, work 2 s c in top of each of 39 main color ribs to left armhole edge (78 sts). Change to white hook.
2nd row—Ch 2, turn, work 1 h d c in each st of row below.
Repeat 2nd row 15 times more (about 3½ inches above beginning of yoke).

Shoulders—**First row**—Slip st over 4 sts, 1 s c in next st, work h d c to within 5 sts of end, 1 s c in next st (this leaves off 4 sts each side).

(Continued on Page 41)

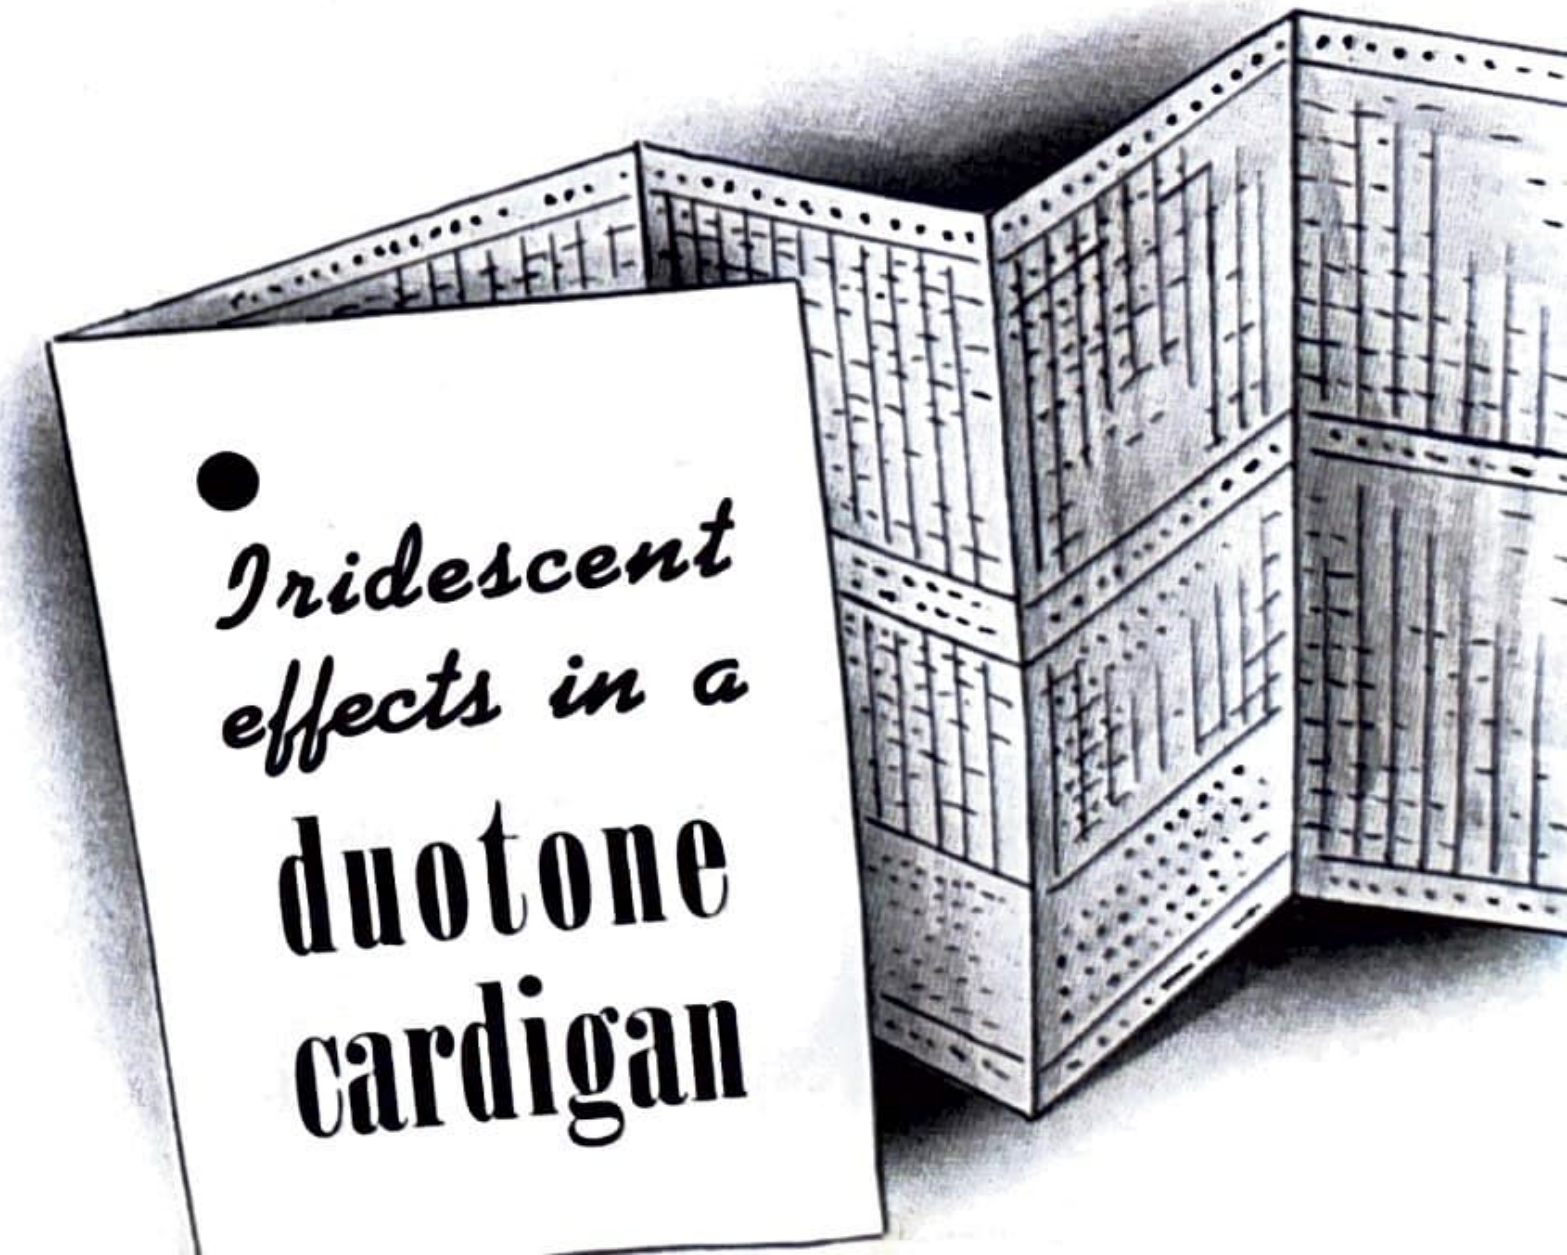

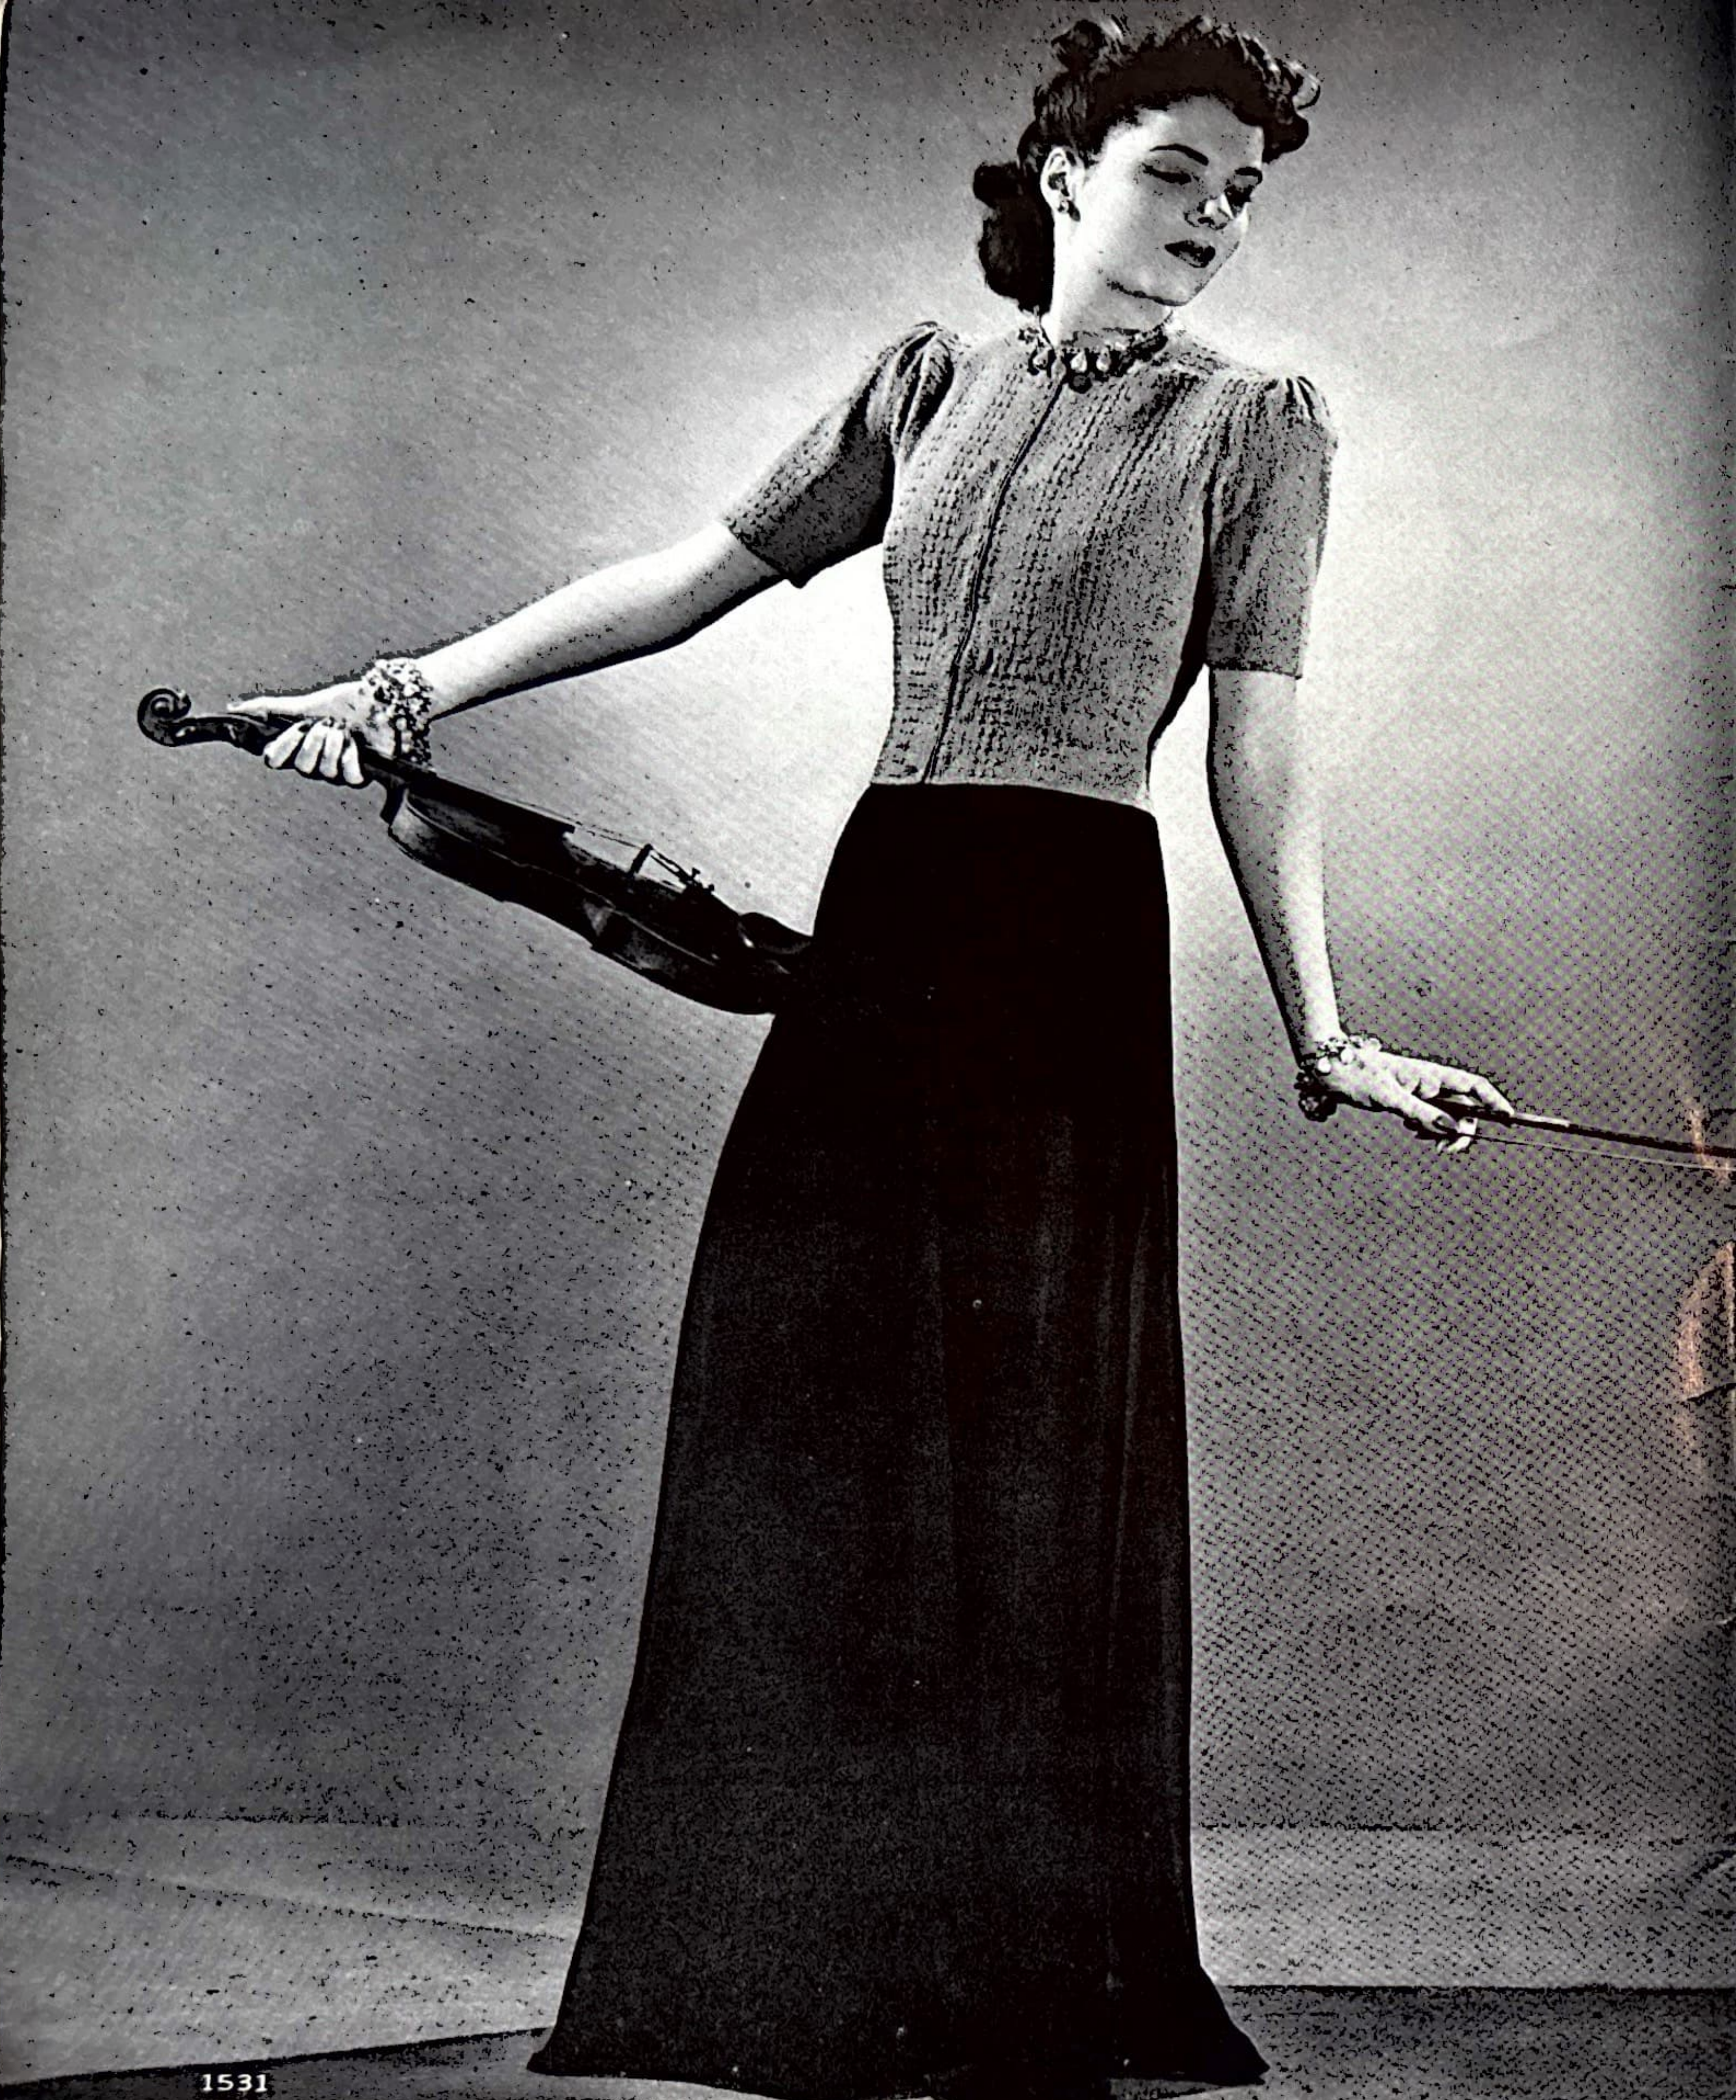

1531

Bead-Studded Cardigan No. 1531

Size 16

YARNS—Bear Brand or Bucilla Angel Crepe†, 7 balls.

NEEDLES — Bucilla 14-inch White, Article 3846, 1 pair each, Sizes 1 and 2.
Bucilla Steel Crochet Hook, Article 4300, Size 2.

TRIMMINGS—Bucilla Gold Beads, Article 4221, 2 bunches.
Talon Slide Fastener, Style 101, 16 inches long.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT
Bust 35 inches.
Width across back at underarm 17 inches.
Width across back at shoulders 12½ inches.
Width of each front at underarm 9 inches.
Length from lower edge to underarm 10 inches.
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 4½ inches.

GAUGE: 8 sts=1 inch 11 rows=1 inch

TO STRING BEADS—Tie one end of the thread on which beads are strung to Angel Crepe, tying in a flat knot. Allow beads to fall from thread onto Angel Crepe. Always string beads before using each ball of yarn, having about 300 beads to a ball.
Entire sweater is worked in beaded stripes.
Pattern is a multiple of 17 at lower edge.

BACK—With size 2 needles and beaded yarn cast on 119 sts for lower edge keeping beads back on the yarn (beads are brought forward as needed).
First row (right side)—K all sts.
2nd row—P 3, † slip down a bead, k 1 st fastening bead on right side of work, p 10, * slip down a bead, k 1, p 2 *, repeat between *'s once †; repeat between †'s 5 times, slip down a bead, k 1, p 10, repeat between *'s once.
K 1 row, p 1 row, k 1 row, p 1 row. These 6 rows form one repeat of pattern.
Continue pattern, decreasing 1 st each side every ¾ inch twice (115 sts). Change to size 1 needles and work even until 2 inches from lower edge. Decrease 1 st in each of the 7 wide stockinette st stripes between beaded stripes by working first 2 sts of stripe together (108 sts). Work in pattern, with 9 instead of 10 sts between beaded stripes, until 2¾ inches from lower edge. Increase 1 st each side; repeat increases every ¾ inch until 4 inches from lower edge. Increase 1 st in each of the 7 wide stockinette st stripes, increasing in first st after beaded stripe. Change to size 2 needles and continue pattern, again having 10 sts in each wide stripe. Continue to increase 1 st each side every ¾ inch until 10 sts in all have been increased each side (135 sts), being careful to carry out beaded stripe when sufficient sts have been increased. Work even until 10 inches from lower edge.

Armholes—Bind off 9 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 8 times (101 sts). Work even until 7 inches above underarm.

Shoulders—Bind off 5 sts at beginning of each of next 8 rows; 4 sts at beginning of each of next 6 rows (32 sts for each shoulder).
Bind off remaining sts for back of neck.

LEFT FRONT—With size 2 needles and beaded yarn, cast on 66 sts for lower edge. K 1 row.
2nd row—P 1, repeat between †'s of 2nd row of back 3 times, slip down a bead, k 1, p 10, slip down a bead, k 1, p 2.
Continue pattern, keeping front edge (end of k rows) even and decreasing 1 st at underarm edge every ¾ inch twice. Change to size 1 needles and work even until 2 inches from lower edge. Decrease 1 st in each of the 4 wide stockinette st stripes as on back. Work until 2¾ inches. Increase 1 st at underarm edge and repeat every ¾ inch until 4 inches from lower edge. Increase 1 st in each of the 4 wide stockinette st stripes. Change to size 2 needles and continue to shape underarm edge as for back until same length as back to underarm, ending at underarm edge (74 sts).

Armhole—Bind off 9 sts at beginning of next row for underarm. Shape armhole as for back (57 sts). Work even until 6 inches above underarm, ending at front edge.

Neck Shaping and Shoulder—Bind off 9 sts as to p at beginning of next row, finish row. Decrease 1 st at neck edge *every* row until 7 inches above underarm. Shape shoulder as for back at beginning of rows worked from armhole edge, at the same time continue to decrease at neck edge every row until 16 sts in all have been decreased, then keep neck edge even.

RIGHT FRONT—With size 2 needles and beaded yarn cast on 66 sts for lower edge. K 1 row.
2nd row—P 3, repeat between †'s of 2nd row of back 3 times, slip down a bead, k 1, p 10, slip down a bead, k 1.

(*Continued on Page* 42)

Scintillate
in your
bead-studded
cardigan

Wear the waistcoat blouse alone or with your suit

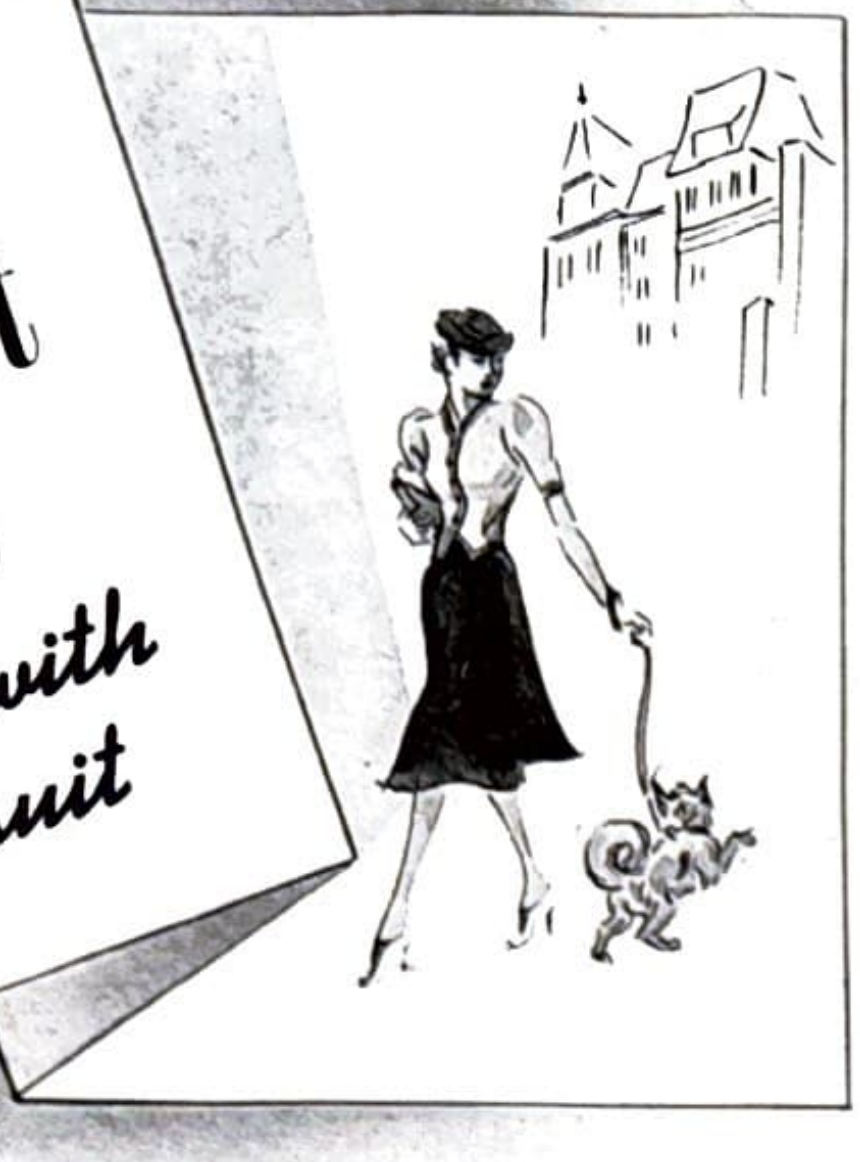

Waistcoat Blouse No. 1541

Size 16

YARNS—Bear Brand or Bucilla Cobble Crepe†, 9 balls Main Color; 1 ball Contrasting Color.

NEEDLES — Bucilla 14-inch Steel, Article 3499, 1 pair each, Sizes 1 and 2.
Bucilla Steel Crochet Hook, Article 4300, Size 2.

TRIMMINGS—6 Buttons ½ inch diameter.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT

Width across back at underarm 16 inches.
Width across back at shoulders 13¼ inches.
Width across each front at underarm 10¼ inches (including crochet edge).
Length from lower edge to underarm 11¼ inches (including crochet edge).
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 5¼ inches (including crochet edge).

GAUGE:

Size 2 needle—7 sts=1 inch 11 rows=1 inch

Entire vest is worked with main color (m c) in ribbing.

BACK—With size 2 needles, cast on 93 sts for lower edge.
First row (right side)—K 3, * p 3, k 3; repeat from * across row.
2nd row—P 3, * k 3, p 3; repeat from * across row.
Repeat these 2 rows until 2½ inches from lower edge, ending on right side.
Change to size 1 needles and work ribbing even for 1 inch for waistline, ending on wrong side.
Change to size 2 needles and increase 1 st each side of next row; repeat increases every 8th row 8 times, working increased sts in ribbing (111 sts).
Work even until 11 inches from lower edge, ending on right side.

Armholes—Bind off 4 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 5 times (93 sts).
Work even until 6¾ inches above underarm.

Shoulders—Bind off 3 sts at beginning of each of next 2 rows, then 4 sts at beginning of each of next 14 rows (31 sts for each shoulder).
Bind off remaining 31 sts for back of neck.

LEFT FRONT—With size 2 needles cast on 1 st for point.
First row (right side)—K in front, back and front of this st (3 sts).
2nd row—P 3, cast on 3 sts (underarm edge).
3rd row—P 3, k 2, increase 1 st in last st (front edge).
4th row—K 1, p 3, k 3, cast on 3 sts.
5th row—K 3, p 3, k 3, increase 1 st in last st.
6th row—K 2, p 3, k 3, p 3, cast on 3 sts.
Continue to work ribbing in this way, casting on 3 sts at underarm edge every 2nd row twice more, then 6 sts every 2nd row 4 times and increasing 1 st at front edge every 2nd row 7 times more, working cast-on and increased sts in ribbing (51 sts).
Keeping underarm edge even, repeat increase at front edge as before 9 times more (60 sts).
Work even until 2½ inches from last cast-on row.
Change to size 1 needles and work ribbing for same number of rows as on back for waistline, ending on wrong side.
Change to size 2 needles. Keeping front edge even, increase 1 st at beginning of next row (underarm edge) and repeat increase every 8th row 8 times (69 sts).
Work even until same number of rows as on back to underarm, ending at underarm edge.

Armhole and Neck Shaping—Bind off 10 sts at beginning of next row for underarm. Decrease 1 st at armhole edge every 2nd row 8 times and at the same time decrease 1 st at neck every 4th row 4 times (47 sts).
Keeping armhole edge even, continue to decrease at neck edge as before until 7 inches above underarm.

Shoulder—Shape shoulder as on back, continuing to decrease at neck edge as before until there are 20 decreases in all, then work neck edge even.

RIGHT FRONT—With size 2 needles, cast on 1 st for point.
First row (right side)—K in front, back and front of this st (3 sts).
2nd row—P 3.
3rd row—Increase 1 st in first st (front edge), k 2, cast on 3 sts (underarm edge).
4th row—K 3, p 3, k 1.
5th row—Increase 1 st in first st, k 3, p 3, cast on 3 sts.
6th row—P 3, k 3, p 3, k 2.
Continue to work ribbing in this way, casting on 3 sts at underarm edge every 2nd row 3 times more, then 6 sts every 2nd row 4 times and increasing 1 st at front edge every 2nd row 7 times more, working cast-on and increased sts in ribbing (51 sts).
Keeping underarm edge even, repeat increase at front edge as before 9 times more (60 sts).
Work 3 rows even, ending at front edge.
Buttonhole row—K 3, bind off 2 sts for buttonhole, work across row.
Next row—Work across row, casting on 2 sts over bound-off sts.
Work 3 rows even (underarm should measure 2½ inches from last cast-on row).
Change to size 1 needles and work ribbing even for same number of rows as on back waistline ribbing, ending on wrong side.

(*Continued on Page* 42)

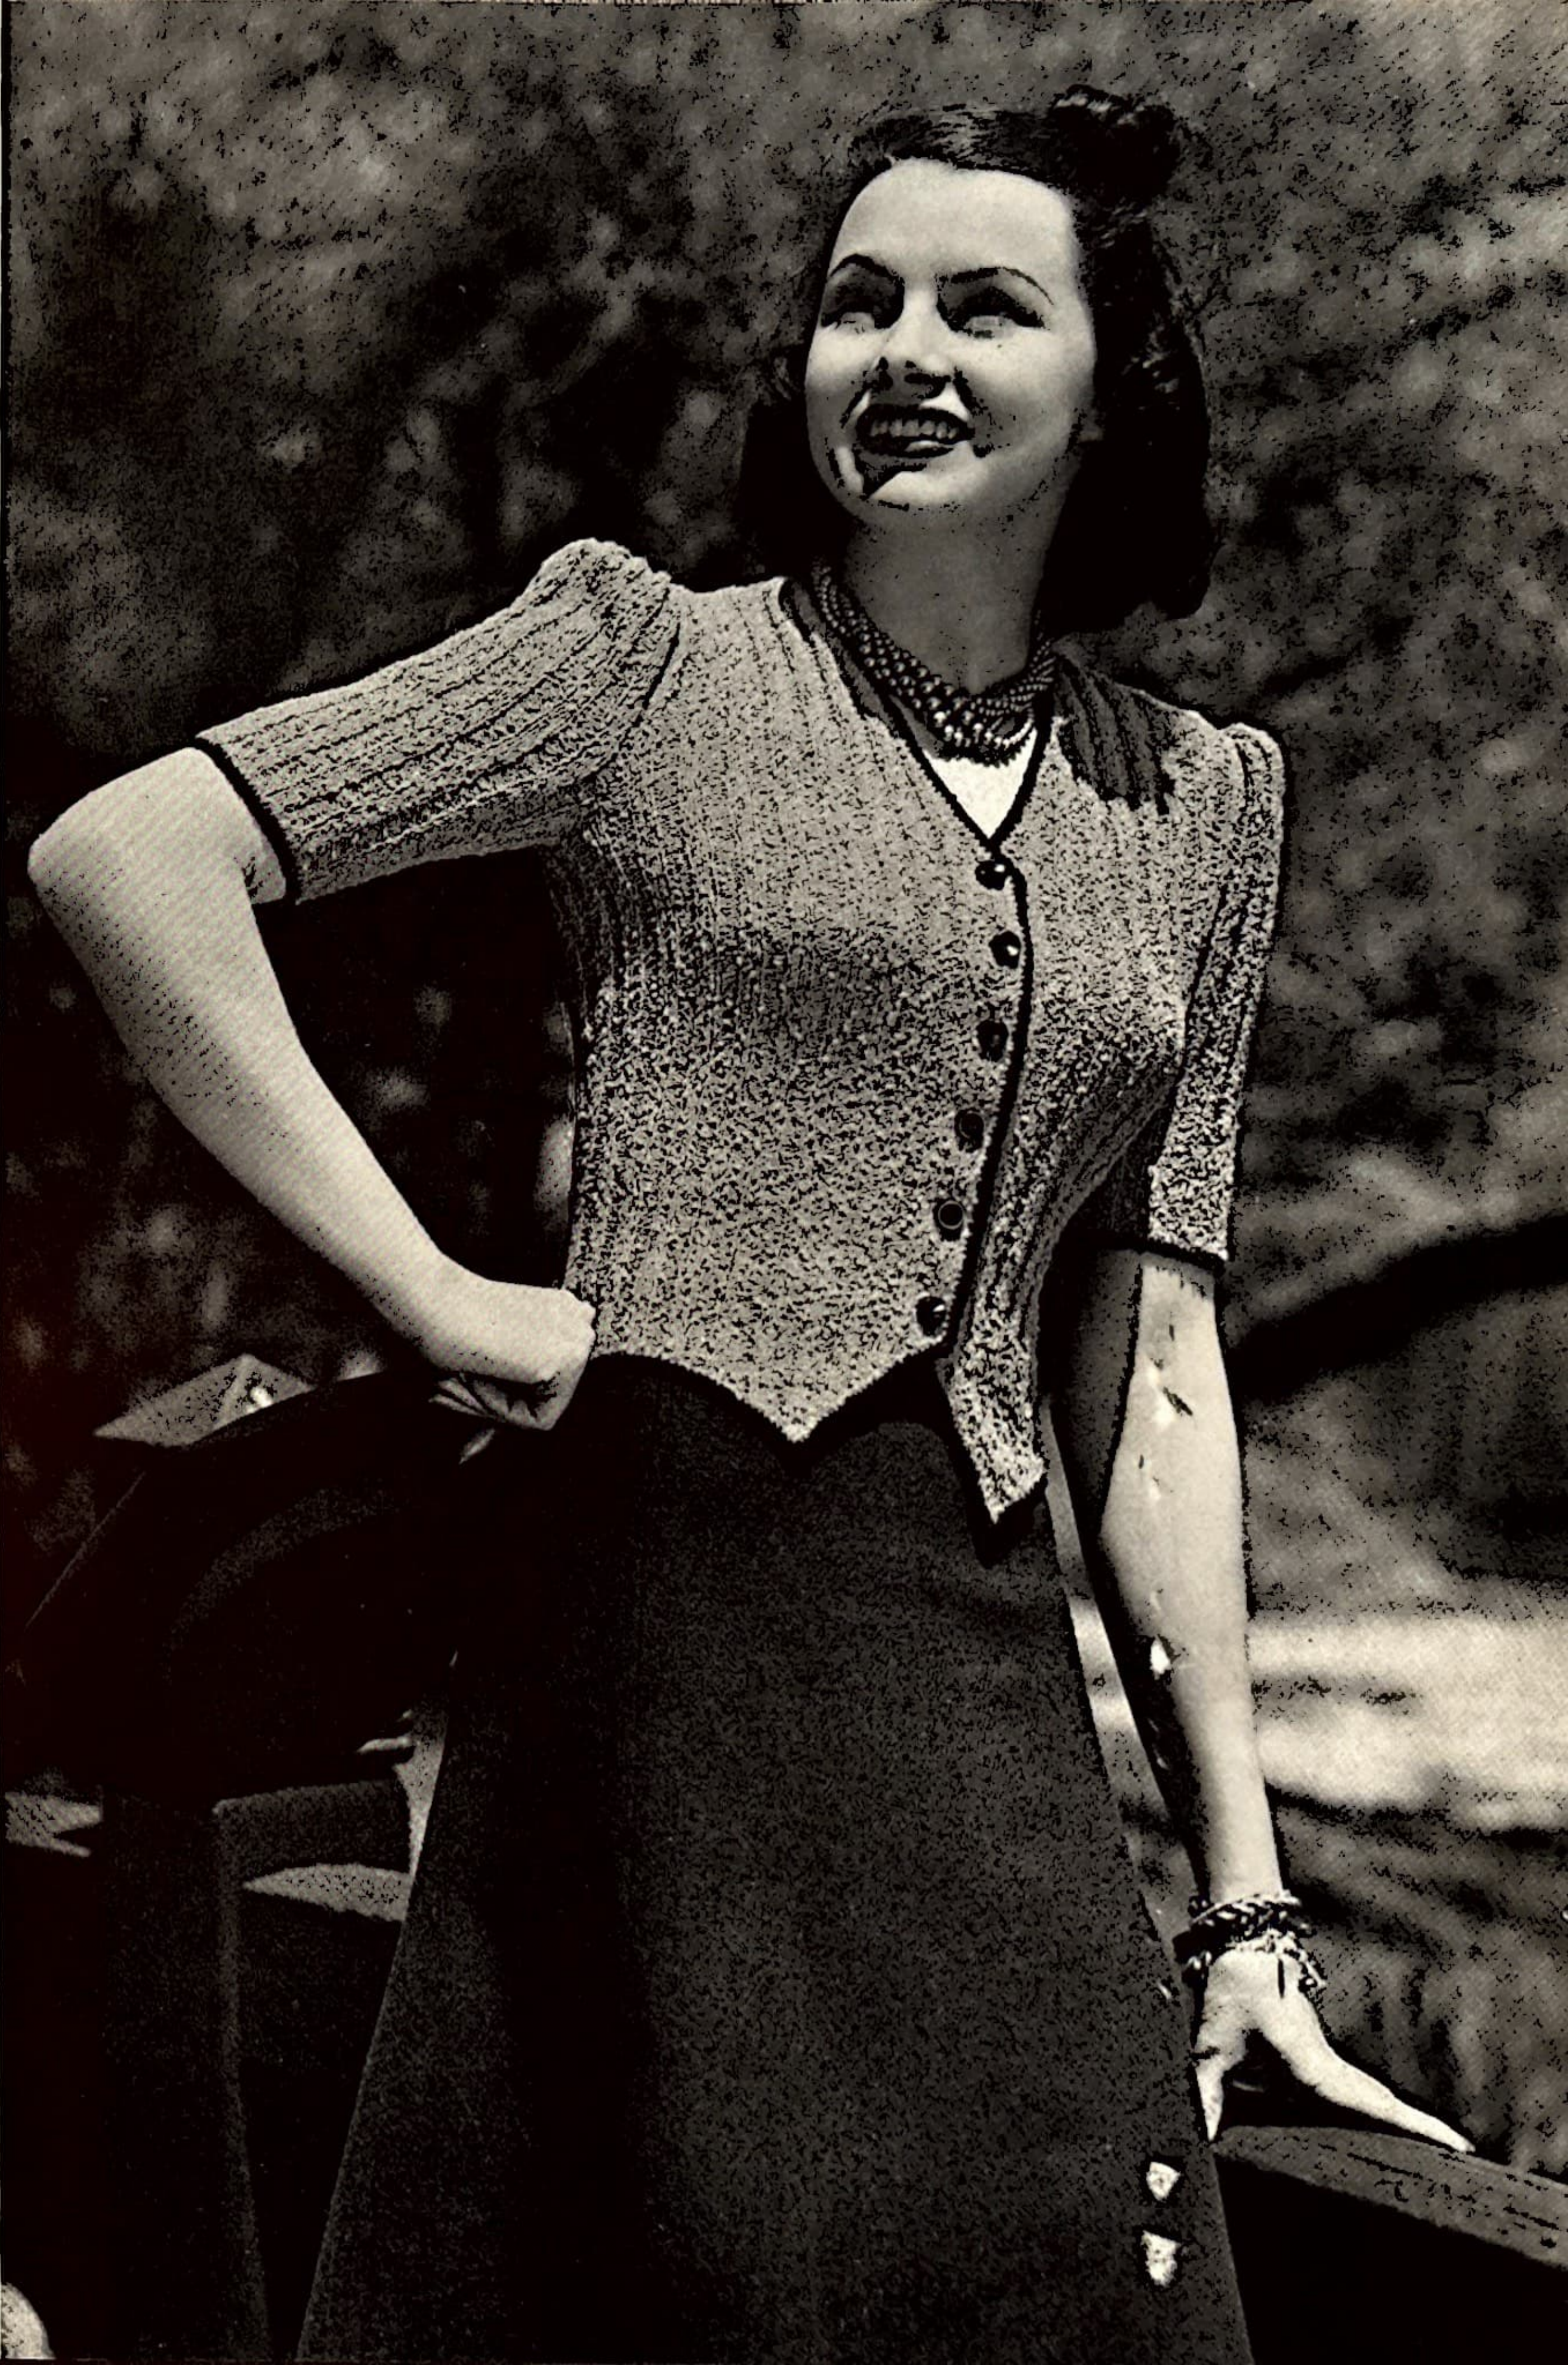

No. 1541

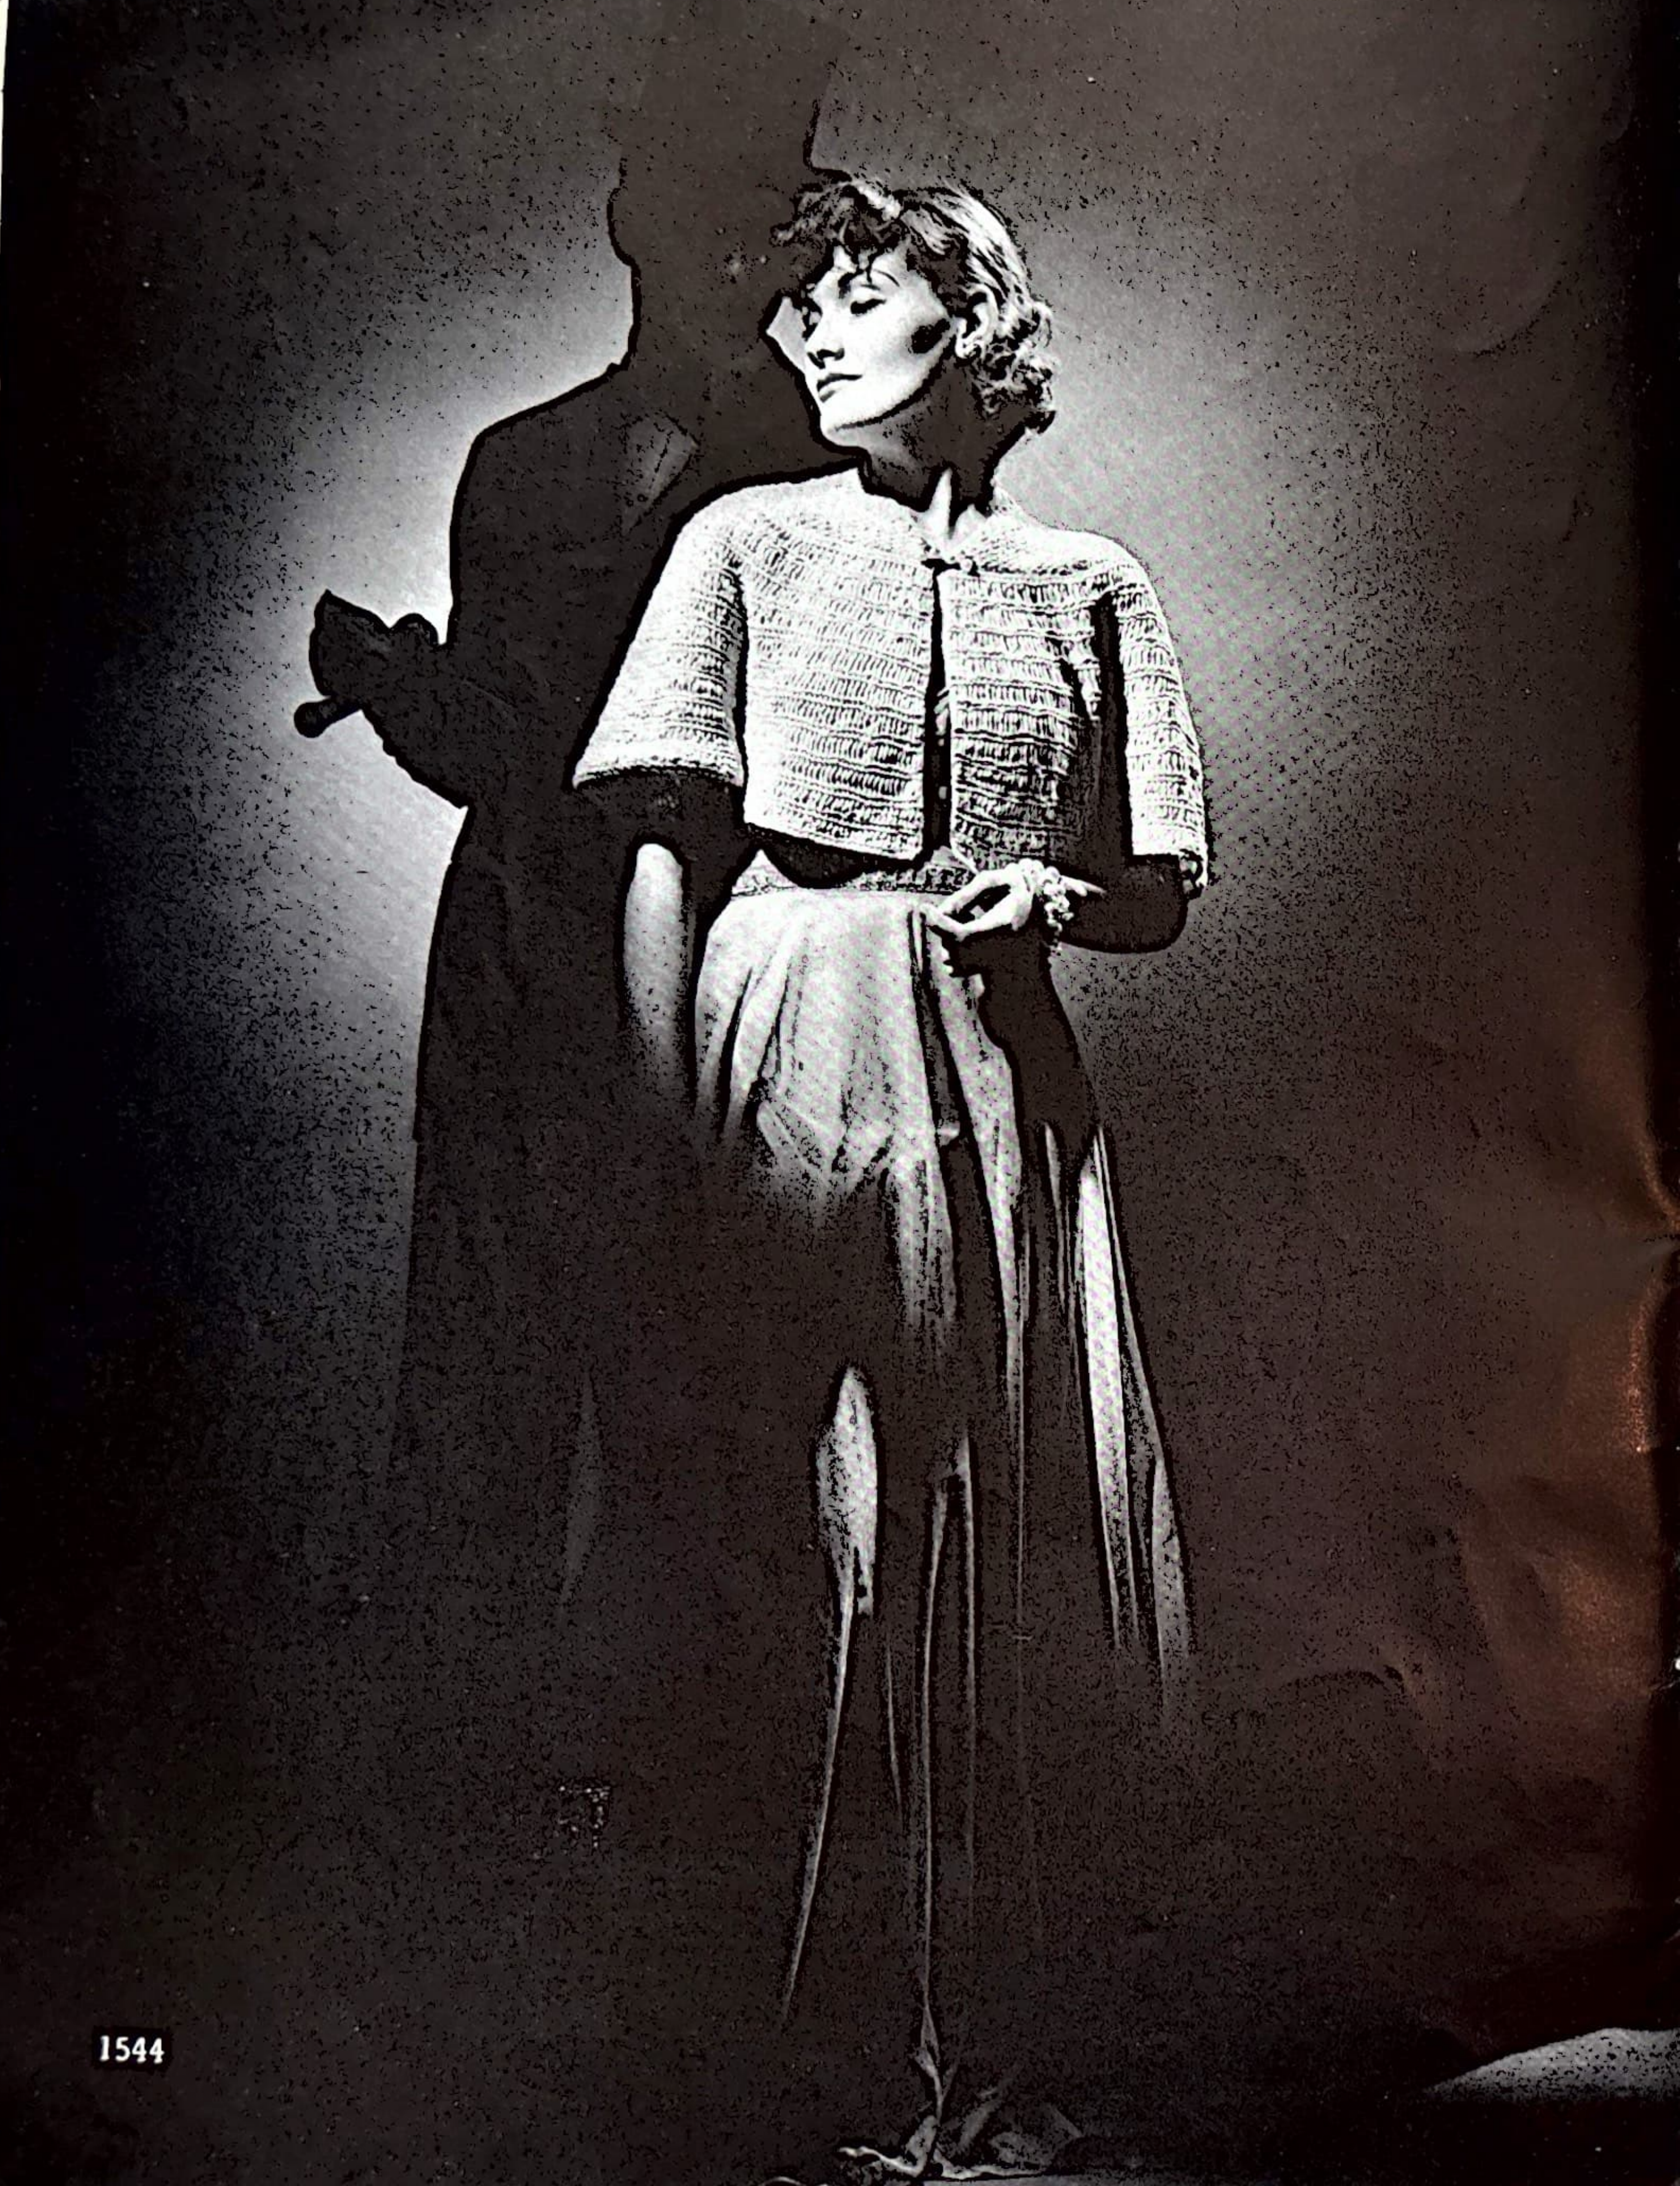

1544

The fragile, adorable french doll bolero of luxurious Chenille

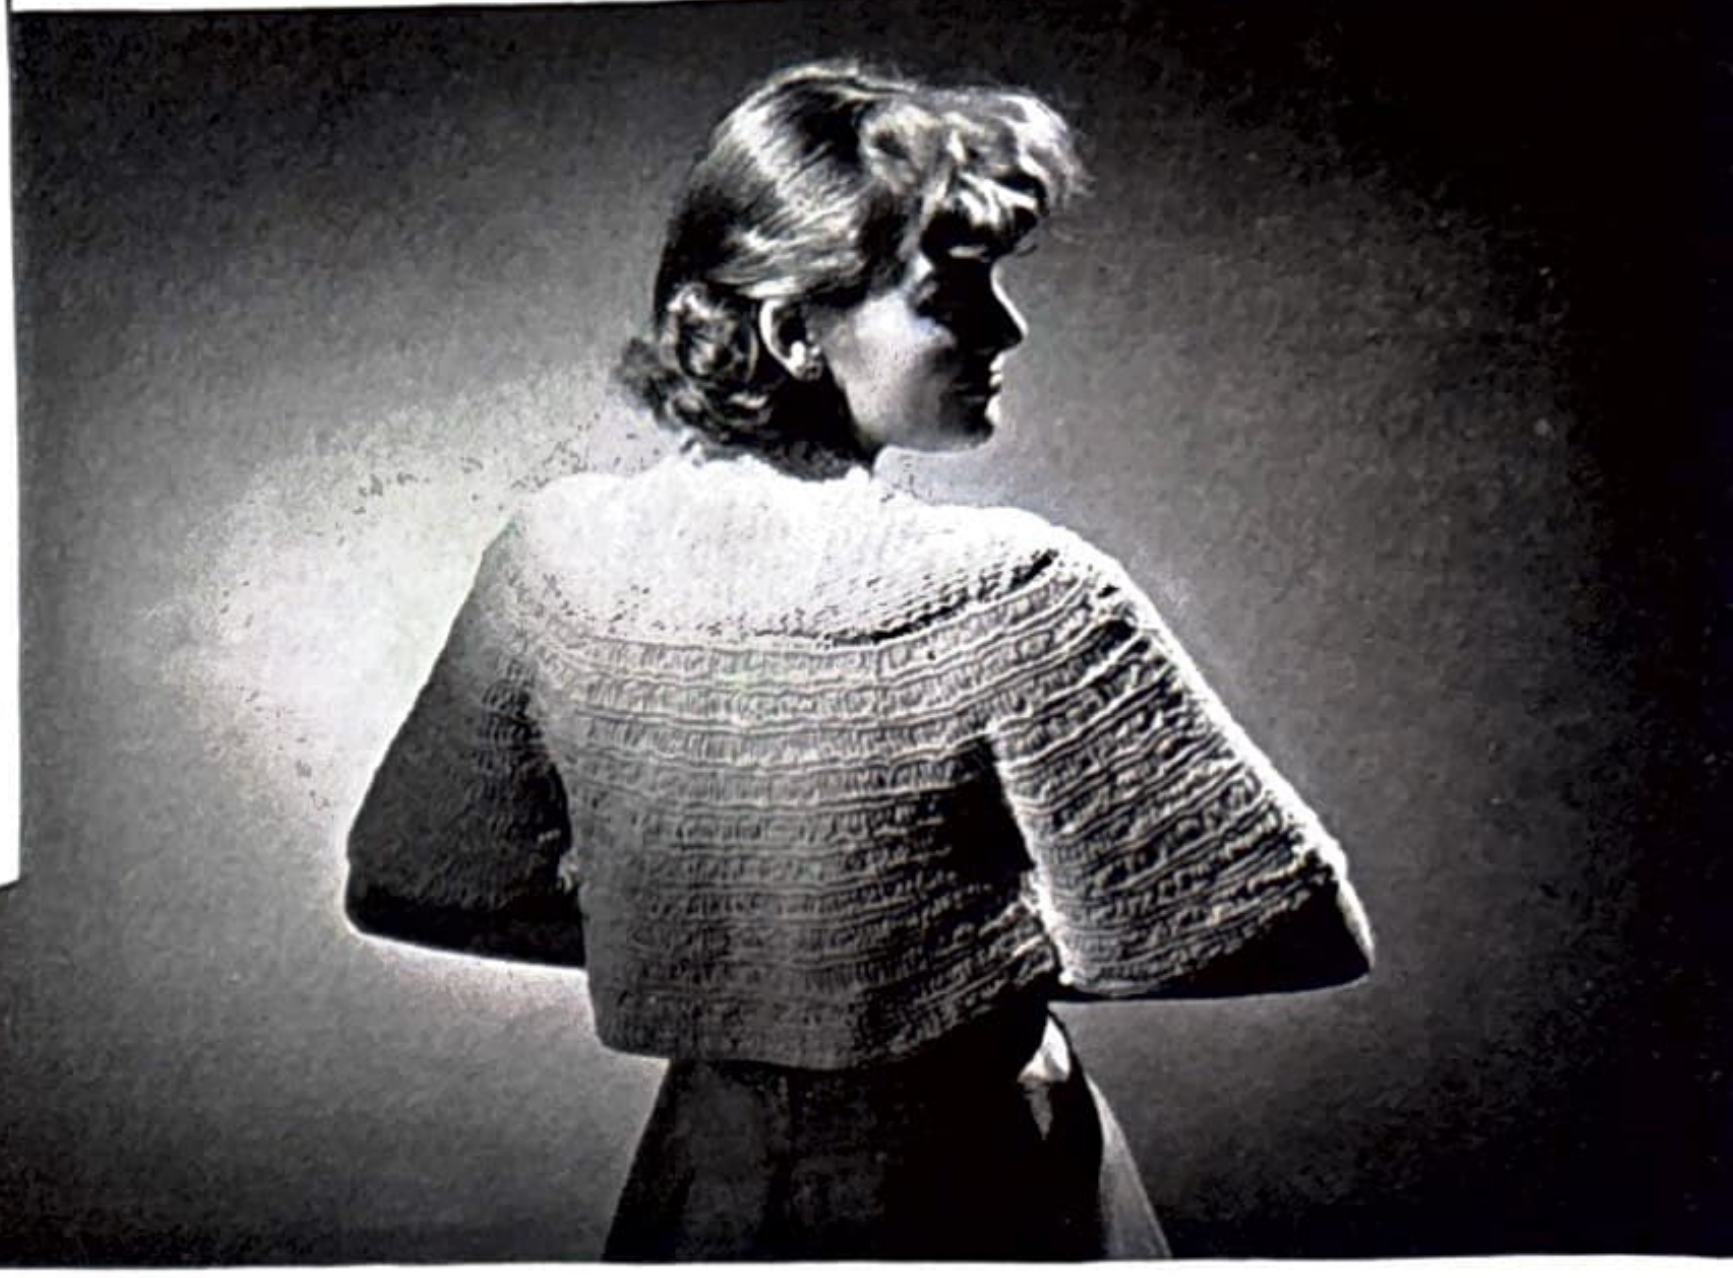

French Doll Bolero No. 1544

Size 16

YARNS — Bucilla Water Repellent Chenille, 14 skeins.

NEEDLES — 1 pair Bucilla 14-inch Aluminum, Article 3499, Size 5.
Bucilla Steel Crochet Hook, Article 4300, Size 00.

TRIMMINGS—1 Pearl Clasp.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT

Width of back at lower edge 20 inches; at yoke edge 12 inches.

Width of each front at lower edge 11 inches; at yoke 6¾ inches.

Width of sleeves at lower edge 17¾ inches; at yoke 8 inches.

Length of back, fronts and sleeves from lower edge to yoke 11 inches.

Yoke is 5 inches from lower edge to neck edge.

GAUGE:

Seed St — 9 sts=2 inches — 15 rows=2 inches
Drop St — 9 sts=2 inches — 4 rows=1 inch

BACK YOKE—Cast on 39 sts for lower edge. Work entire yoke in seed st as follows:

First row (right side)—K 1, * p 1, k 1; repeat from * across row; cast on 4 sts. Repeat this row once (47 sts).

3rd row—K 1, * p 1, k 1; repeat from * across row; cast on 2 sts.

Repeat this row 15 times more (79 sts).

19th row—Work even.

Shoulder Shaping—Bind off 5 sts at beginning of each of next 2 rows, then 3 sts at beginning of each of next 16 rows (29 sts for each shoulder).

Bind off remaining 21 sts for back of neck.

RIGHT FRONT YOKE—Cast on 21 sts for lower edge.

First row (right side)—K 1, * p 1, k 1; repeat from * across row; cast on 4 sts.

2nd row—Work seed st even on 25 sts.

3rd row—Work 2 tog (for neck shaping), work seed st across row; cast on 2 sts (26 sts).

4th row—Work even. Repeat 3rd and 4th row 7 times more (33 sts).

19th row—Work 2 tog, work across row (32 sts).

Shoulder Shaping — **20th row** — Bind off 5 sts for shoulder, work across row. Bind off 3 sts at shoulder edge every 2nd row 8 times, continuing to decrease at neck edge as before 3 times more, then work neck edge even. Fasten off.

Make **LEFT FRONT YOKE** same as right front yoke.

BACK—Cast on 90 sts for lower edge.

Drop St Pattern—**First row** (right side)—Knit.

2nd row—Insert needle in first st, wrap yarn twice around needle and k the st, * insert needle in next st, wrap yarn 3 times around needle and k the st, repeat from * across row. Be careful Chenille does not kink when wrapping around needle.

3rd row—K, dropping extra wraps.

4th row—Knit.

Repeat these 4 rows for entire back.

Work even until 4 inches from lower edge, ending with 4th pattern row.

First decrease row—K 4, * k 2 tog, k 8; repeat from *, ending last repeat k 4 (81 sts).

Work even until 6 inches from lower edge, ending with 4th pattern row.

2nd decrease row—K 4, * k 2 tog, k 7; repeat from *, ending last repeat k 3 (72 sts).

Work even until 8 inches, ending with 4th pattern row.

3rd decrease row—K 3, * k 2 tog, k 6; repeat from *, ending last repeat k 3 (63 sts).

Work even until 10 inches, ending with 4th pattern row.

4th decrease row—K 3, * k 2 tog, k 5; repeat from *, ending last repeat k 2 (54 sts).

Work even until 11 inches from lower edge, ending with first pattern row. Bind off.

FRONTS—Cast on 50 sts for lower edge. Work same as back, decreasing 5 sts in each decrease row instead of 9 sts as on back and having 30 sts left after 4th decrease row.

Make other front in same way.

(Continued on Page 43)

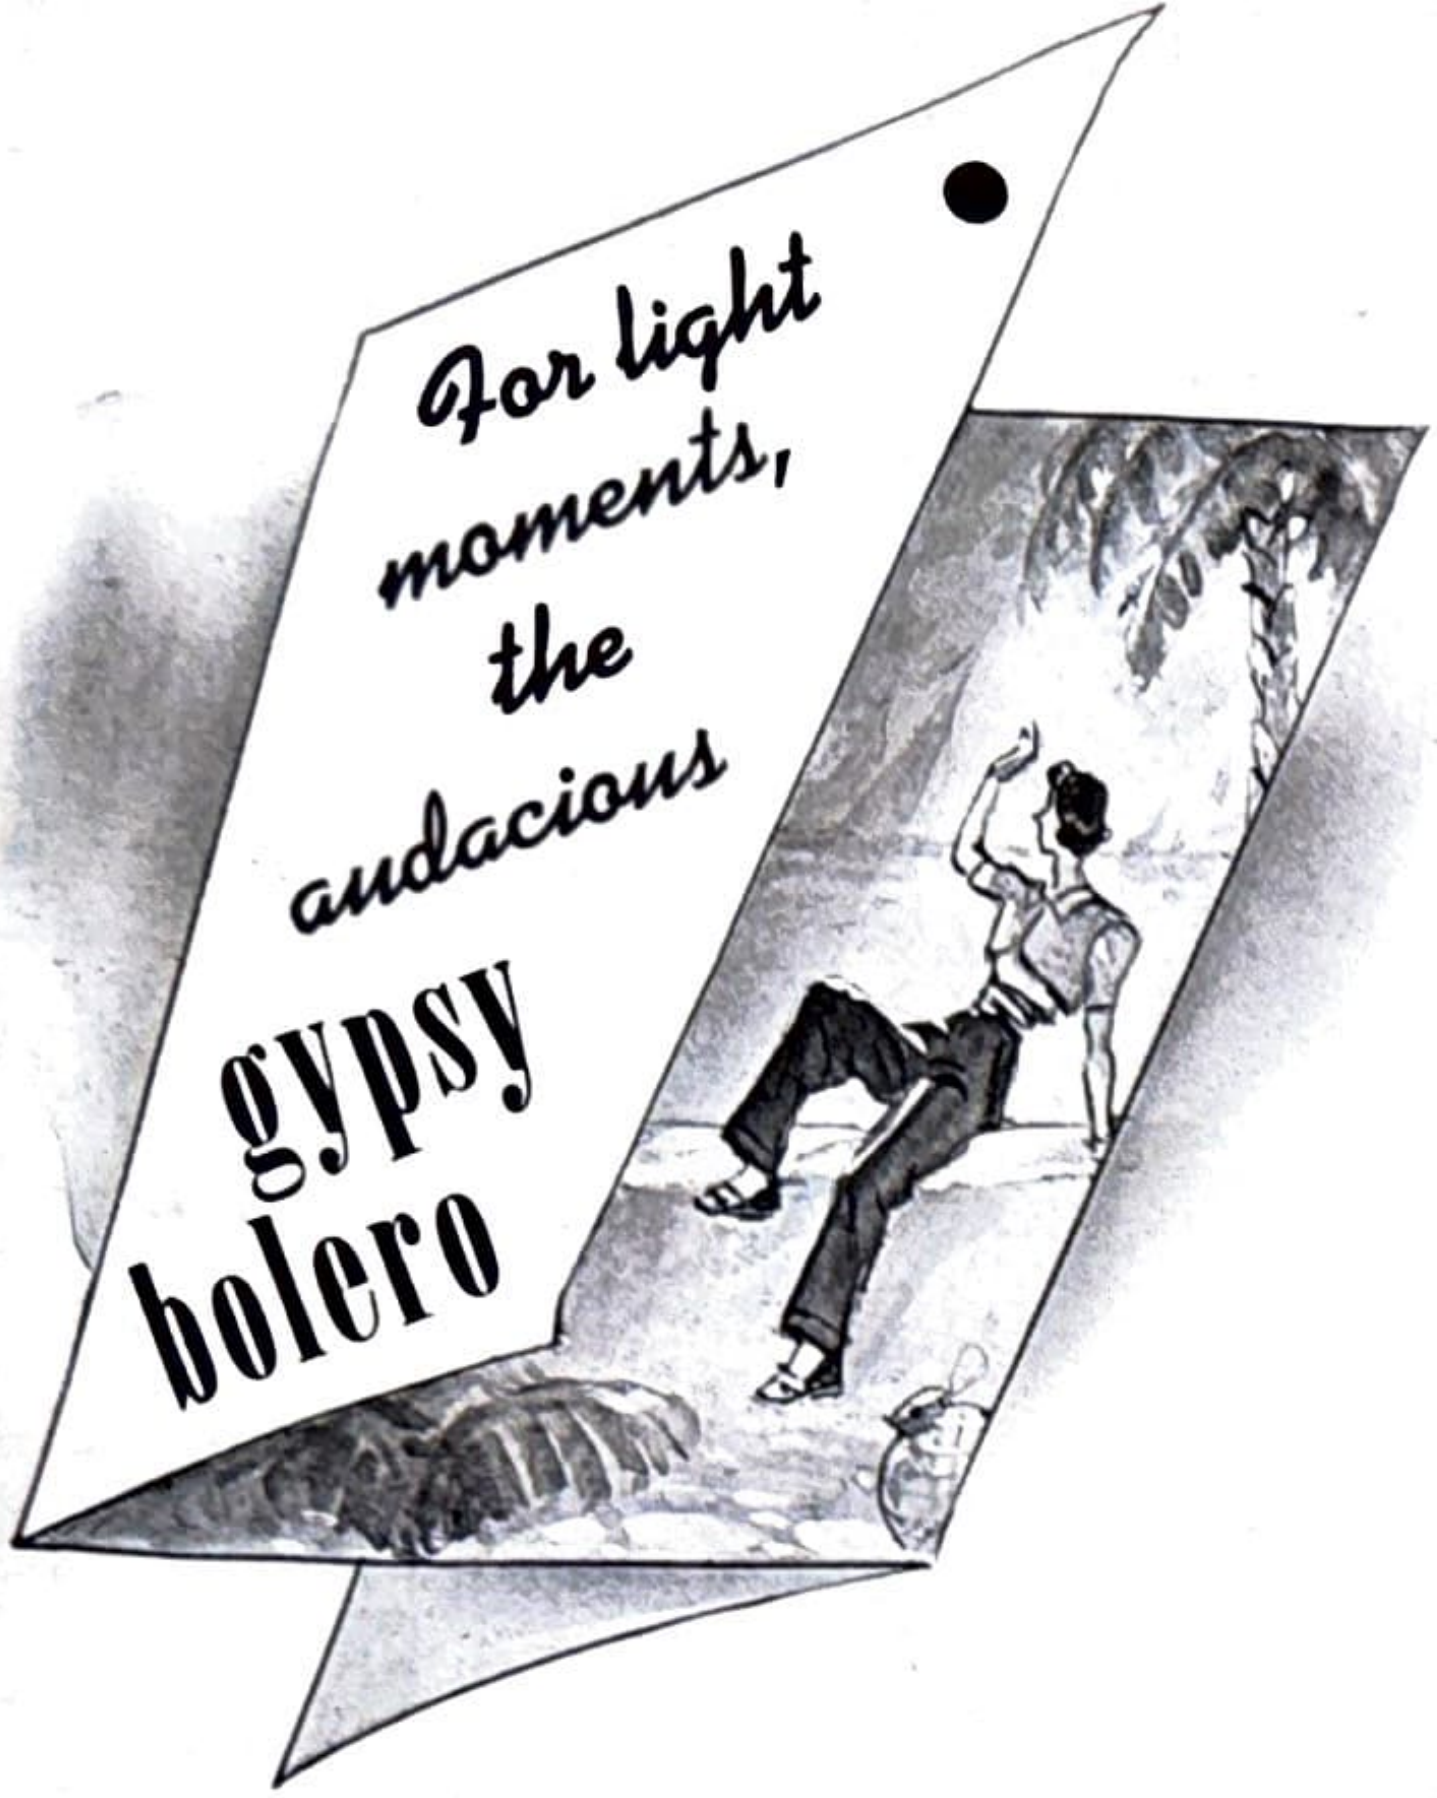
For light moments, the audacious gypsy bolero

Gypsy Bolero No. 1548

Size 16

YARNS—Bear Brand or Bucilla Kwiltee†, 5 skeins.

NEEDLES — 1 pair Bucilla 14-inch Cedarwood, Article 3860, Size 13.
Bucilla 6-inch White Crochet Hook, Article 3840, Size 9.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT
Width across back at underarm 16¼ inches.
Width across back at shoulders 12¾ inches.
Width across each front at underarm 9½ inches.
Length from lower edge to underarm 7½ inches.
Sleeves—Width below underarm 12 inches.
Length from lower edge to underarm 5¼ inches.

GAUGE: 13 sts=4 inches 9 rows=2 inches

BACK—Cast on 53 sts for lower edge.
First row (right side)—P 1, * k 1, p 1, repeat from * across row.
2nd row—K 1, * p 1, k 1, repeat from * across row.
Repeat these 2 rows twice, forming ribbing.

Pattern—First row (right side)—P 5, * k 1, p 5, repeat from * across row.
2nd row—K 5, * p 1, k 5, repeat from * across row.
3rd row—P 4, * k 1, p 1, k 1, p 3, repeat from *, ending last repeat p 4.
4th row—K 4, * p 1, k 1, p 1, k 3, repeat from *, ending last repeat k 4. Repeat first and 2nd row once.
7th row—P 2, * k 1, p 5, repeat from *, ending last repeat p 2.
8th row—K 2, * p 1, k 5, repeat from *, ending last repeat k 2.
9th row—P 1, * k 1, p 1, k 1, p 3, repeat from *, ending last repeat p 1.
10th row—K 1, * p 1, k 1, p 1, k 3, repeat from *, ending last repeat k 1.
Repeat 7th and 8th row once. These 12 rows of pattern are repeated up to neck ribbing.
Work even until 7½ inches from lower edge, ending on wrong side with 4th pattern row.

Armholes—Bind off 3 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 3 times, being careful to keep pattern while decreasing (41 sts).
Work even until 7 inches above underarm, ending on wrong side with 12th pattern row.

Shoulders—First row—Bind off 4 sts, p until there are 4 sts on needle, k 1, * p 1, k 1, repeat from * 11 times, p 8.
2nd row—Bind off 4 sts, k until 4 sts, p 1, * k 1, p 1, repeat from * 11 times, k 4.
3rd row—Bind off 4 sts, work ribbing across 25 sts, p 4.
4th row—Bind off 4 sts, work ribbing across 25 sts.
Continue to work ribbing, binding off 5 sts at beginning of each of next 2 rows (13 sts for each shoulder).
Bind off remaining 15 sts for back of neck.

RIGHT FRONT—Cast on 31 sts for lower edge.
First row (right side)—K 1, * p 1, k 1, repeat from * across row.
2nd row—P 1, * k 1, p 1, repeat from * across row.
Repeat these 2 rows twice more.

Pattern — First row — Work ribbing across 5 sts for border at front edge, p 5, * k 1, p 5, repeat from * across row, ending last repeat p 2.
2nd row—K 2, * p 1, k 5, repeat from * 3 times more, work remaining 5 sts in ribbing.
3rd row—Work 5 sts in ribbing, p 4, * k 1, p 1, k 1, p 3, repeat from *, ending last repeat p 1.
4th row—K 1, * p 1, k 1, p 1, k 3, repeat from * 3 times more, ending last repeat k 4, work 5 sts in ribbing.
Repeat first and 2nd row once.
7th row—Work 5 sts in ribbing, p 2, * k 1, p 5, repeat from * across row.
8th row—* K 5, p 1, repeat from * 3 times more, k 2, work 5 sts in ribbing.
9th row—Work 5 sts, p 1, * k 1, p 1, k 1, p 3, repeat from *, ending last repeat p 4.
10th row—K 4, * p 1, k 1, p 1, k 3, repeat from * 3 times more, ending last repeat k 1, work 5 sts.
Repeat 7th and 8th row once. Repeat these 12 rows of pattern until same number of patterns as on back to underarm, ending on right side with 5th pattern row (underarm edge).

Armhole and Neck Shaping—Bind off 3 sts at beginning of next row for underarm. Working pattern up to shoulder and continuing ribbed border on 5 sts at front edge, decrease 1 st at armhole edge every 2nd row twice, ending at front edge.
Next row—Work 5 sts, p 2 tog for neck shaping, work across row.
Next row—K 2 tog, work across row (24 sts).
Next row—Work 5 sts, p 2 tog, work across row.
Next row—Work even. Repeat these last 2 rows 10 times more (13 sts). Work even until there are same number of patterns as on back up to shoulder, ending at front edge with 12th pattern row.
Next row—Work 5 sts in ribbing, p 8.

Shoulder—First row—Bind off 4 sts, k until 4 sts, work 5 sts in ribbing.
2nd row—Work 5 sts in ribbing, p 4.
3rd row—Bind off 4 sts, work across row.
4th row—Work 5 sts. Bind off.

(Continued on Page 43)

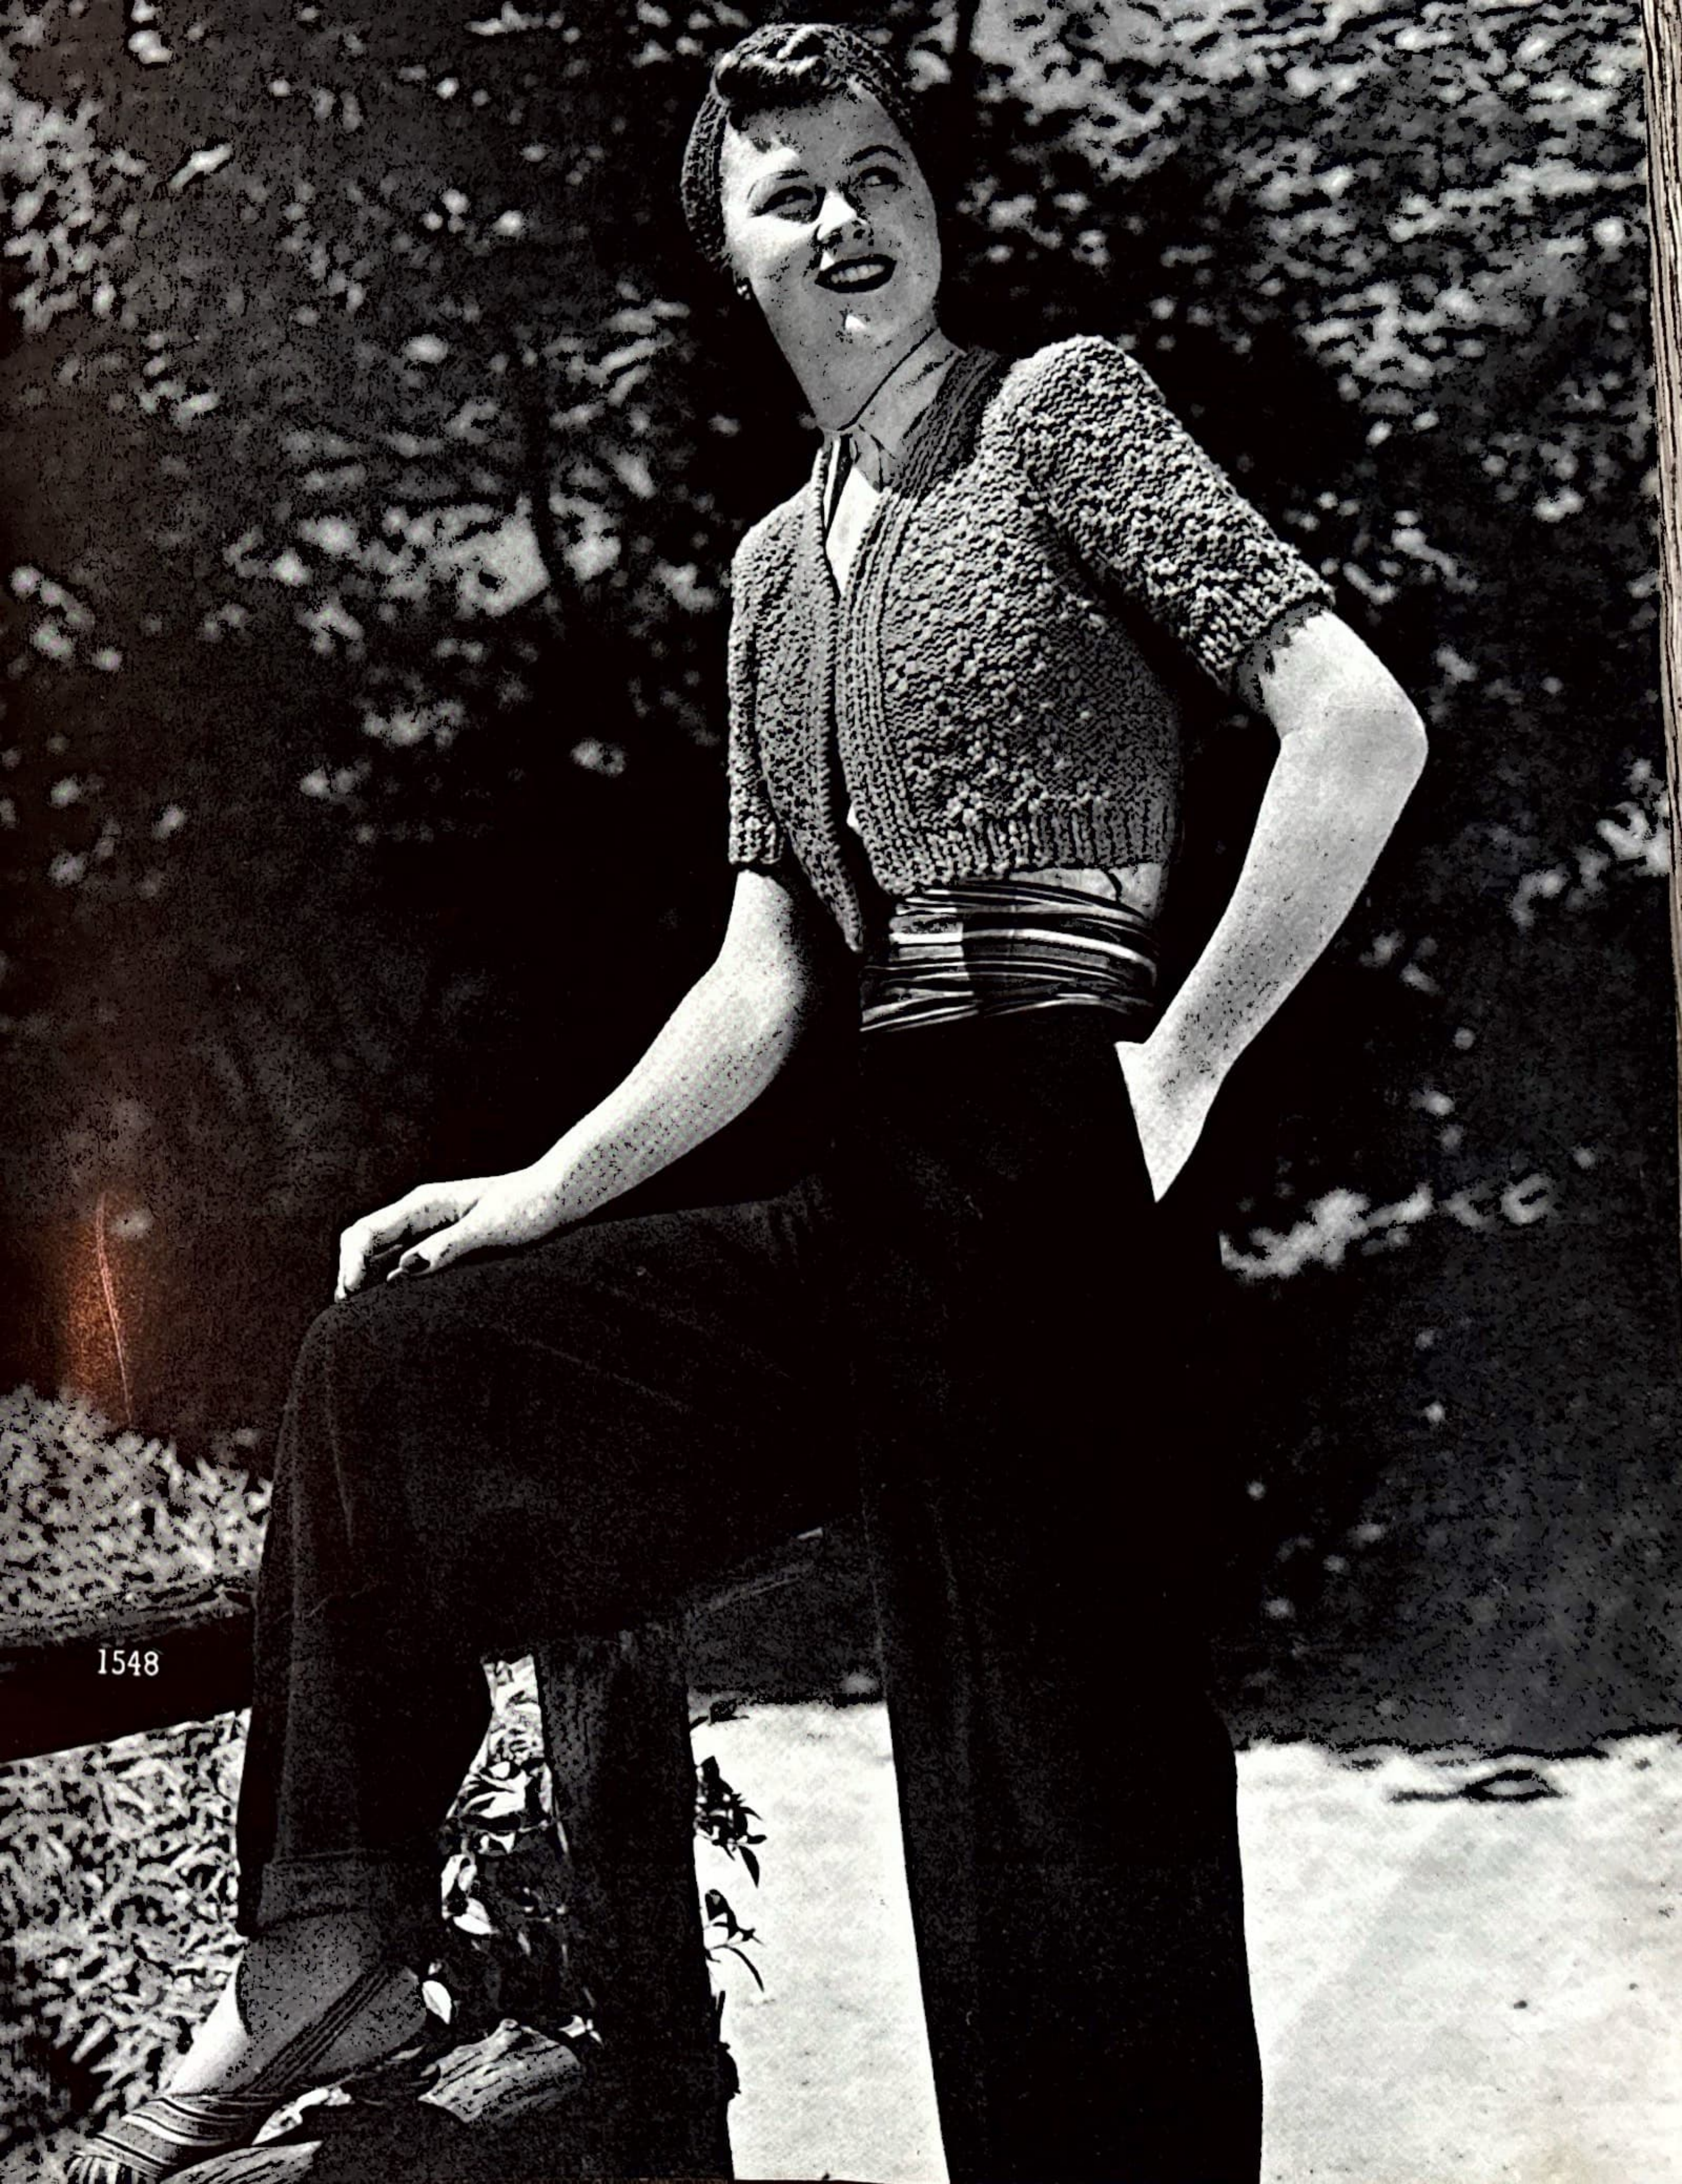

1548

Two Piece Basque Frock No. 1532

Size 14

YARNS — Bear Brand or Bucilla Caledonian Zephyr†, 12 balls (Blouse 5 balls; Skirt 7 balls).

Bear Brand or Bucilla Shetland Floss, 1 ball (for Embroidery).

NEEDLES—Bucilla Sure-Fit 27-inch Circular Steel, Article 3496, Size 2.

1 pair Bucilla 14-inch Steel, Article 3499, Size 1.

Bucilla Steel Crochet Hook, Article 4300, Size 3.

IMPORTANT—Check your gauge first, see page 51.

BLOUSE

MEASUREMENTS FOR FINISHED GARMENT

Bust 33½ inches.

Width across back at underarm 16 inches.

Width across back at shoulders 12 inches.

Width of each front at underarm 9¼ inches, including ¾ inch border at right front and ¾ inch underlap at left front.

Length from lower edge to underarm 11¾ inches, including border.

Sleeves—Width below underarm 12½ inches.

Length from lower edge to underarm 17 inches.

GAUGE:

Size 2 Needle—8 sts=1 inch	11 rows=1 inch
Size 1 Needle—9 sts=1 inch	13 rows=1 inch

Entire blouse is worked with Caledonian Zephyr, embroidery is done with Shetland Floss.

BACK—Cast on 120 sts on circular needle for lower edge. Work back and forth in stockinette st (k 1 row, p 1 row) for 1 inch. Decrease 1 st each side and repeat decreases every inch twice (114 sts).

Change to size 1 needles and work stockinette st for 1 inch. Increase 1 st each side (116 sts). Work even until 5 inches from lower edge. Change to circular needle and continuing stockinette st increase 1 st each side; repeat increases every inch 5 more times (128 sts). Work even until 11 inches from lower edge.

Armholes—Bind off 8 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 8 times (96 sts). Work even until 6½ inches above underarm.

Shoulders—Bind off 6 sts at beginning of each of next 4 rows; 5 sts at beginning of each of next 8 rows (32 sts for each shoulder). Bind off remaining 32 sts.

LEFT FRONT—Pocket Lining—Cast on 22 sts on circular needle. Work stockinette st for 2 inches, ending with a k row. Break yarn. Slip sts to a strand of yarn. Cast on 56 sts on circular needle for lower edge of front. Work stockinette st, increasing 1 st at front edge (end of k and beginning of p rows) every row 5 times; every 2nd row twice (63 sts). Work even until 1 inch from lower edge, ending with a p row. Decrease 1 st at beginning of next row (underarm edge) and cast on 7 sts at end of same row for underlap (69 sts). Work stockinette st, keeping front edge even and decreasing at underarm edge as on back until 3 inches from lower edge (67 sts). Change to size 1 needles and work 1 inch even. Increase 1 st at underarm edge, then work even until 5 inches from lower edge. Change to circular needle. Continue in stockinette st, shaping underarm edge as on back until same length as back to underarm (74 sts), ending at underarm edge.

Armhole—Bind off 10 sts at beginning of next row for underarm. Shape armhole as for back (56 sts). Work even until 2 inches above underarm, ending at armhole edge.

Pocket—Next row—K 8, bind off next 22 sts for pocket opening, finish row. On next row, p 26, slip sts of pocket lining to left point of needle, with right side of lining to wrong side of blouse, p across 22 sts of lining, p 8 (56 sts). Work even until 5 inches above underarm, ending at front edge.

Neck Shaping and Shoulder—Bind off 12 sts as to p at beginning of next row. Decrease 1 st at neck edge every row 8 times, then every 2nd row until 6½ inches above underarm. Shape shoulder as for back at beginning of rows worked from armhole edge, keeping neck edge even when 12 sts in all have been decreased.

RIGHT FRONT—Pocket Lining—Cast on 22 sts on circular needle. Work as for pocket lining of left front. Cast on 56 sts for lower edge. Work stockinette st increasing 1 st at front edge (beginning of k and end of p rows) every row 5 times; every 2nd row twice. Work even until 1 inch from lower edge. Decrease 1 st at underarm edge (62 sts). *Do not cast on sts at front edge.*

Work to correspond to left front having 7 sts less throughout until 2 inches above underarm, ending at front edge (49 sts).

Pocket—Next row—K 19, bind off next 22 sts for pocket opening, k to end. On next row, p 8, p across 22 sts of pocket lining, p to end. Work even until 5 inches above underarm, ending at front edge. Bind off 5 sts at beginning of next row for front of neck. Complete to correspond to left front.

SLEEVES—Cast on 62 sts on circular needle. Work stockinette st increasing 1 st each side every inch 14 times; every ½ inch 5 times (100 sts). Work even until 17 inches from lower edge, ending with a k row. Bind off 8 sts at beginning of each of next 2 rows. Decrease 1 st each side every 2nd row 4 times; every 4th row 10 times (56 sts). P 1 row after last decrease.

Darts for Shaping Top—First row — K 2 tog, k 10, * slip, k and pass, k 1 (seam st), k 2 tog *, k 22; repeat between *'s once, k 10, k 2 tog (50 sts).

2nd and all even numbered rows—Purl.

3rd row—K 2 tog, k 8, repeat between *'s of first row once, k 20, repeat between *'s again, k 8, k 2 tog (44 sts).

5th row—K 2 tog, k 6, repeat between *'s once, k 18, repeat between *'s once, k 6, k 2 tog (38 sts).

(Continued on Page 43)

Youth at any ag
two-piece
basque frock

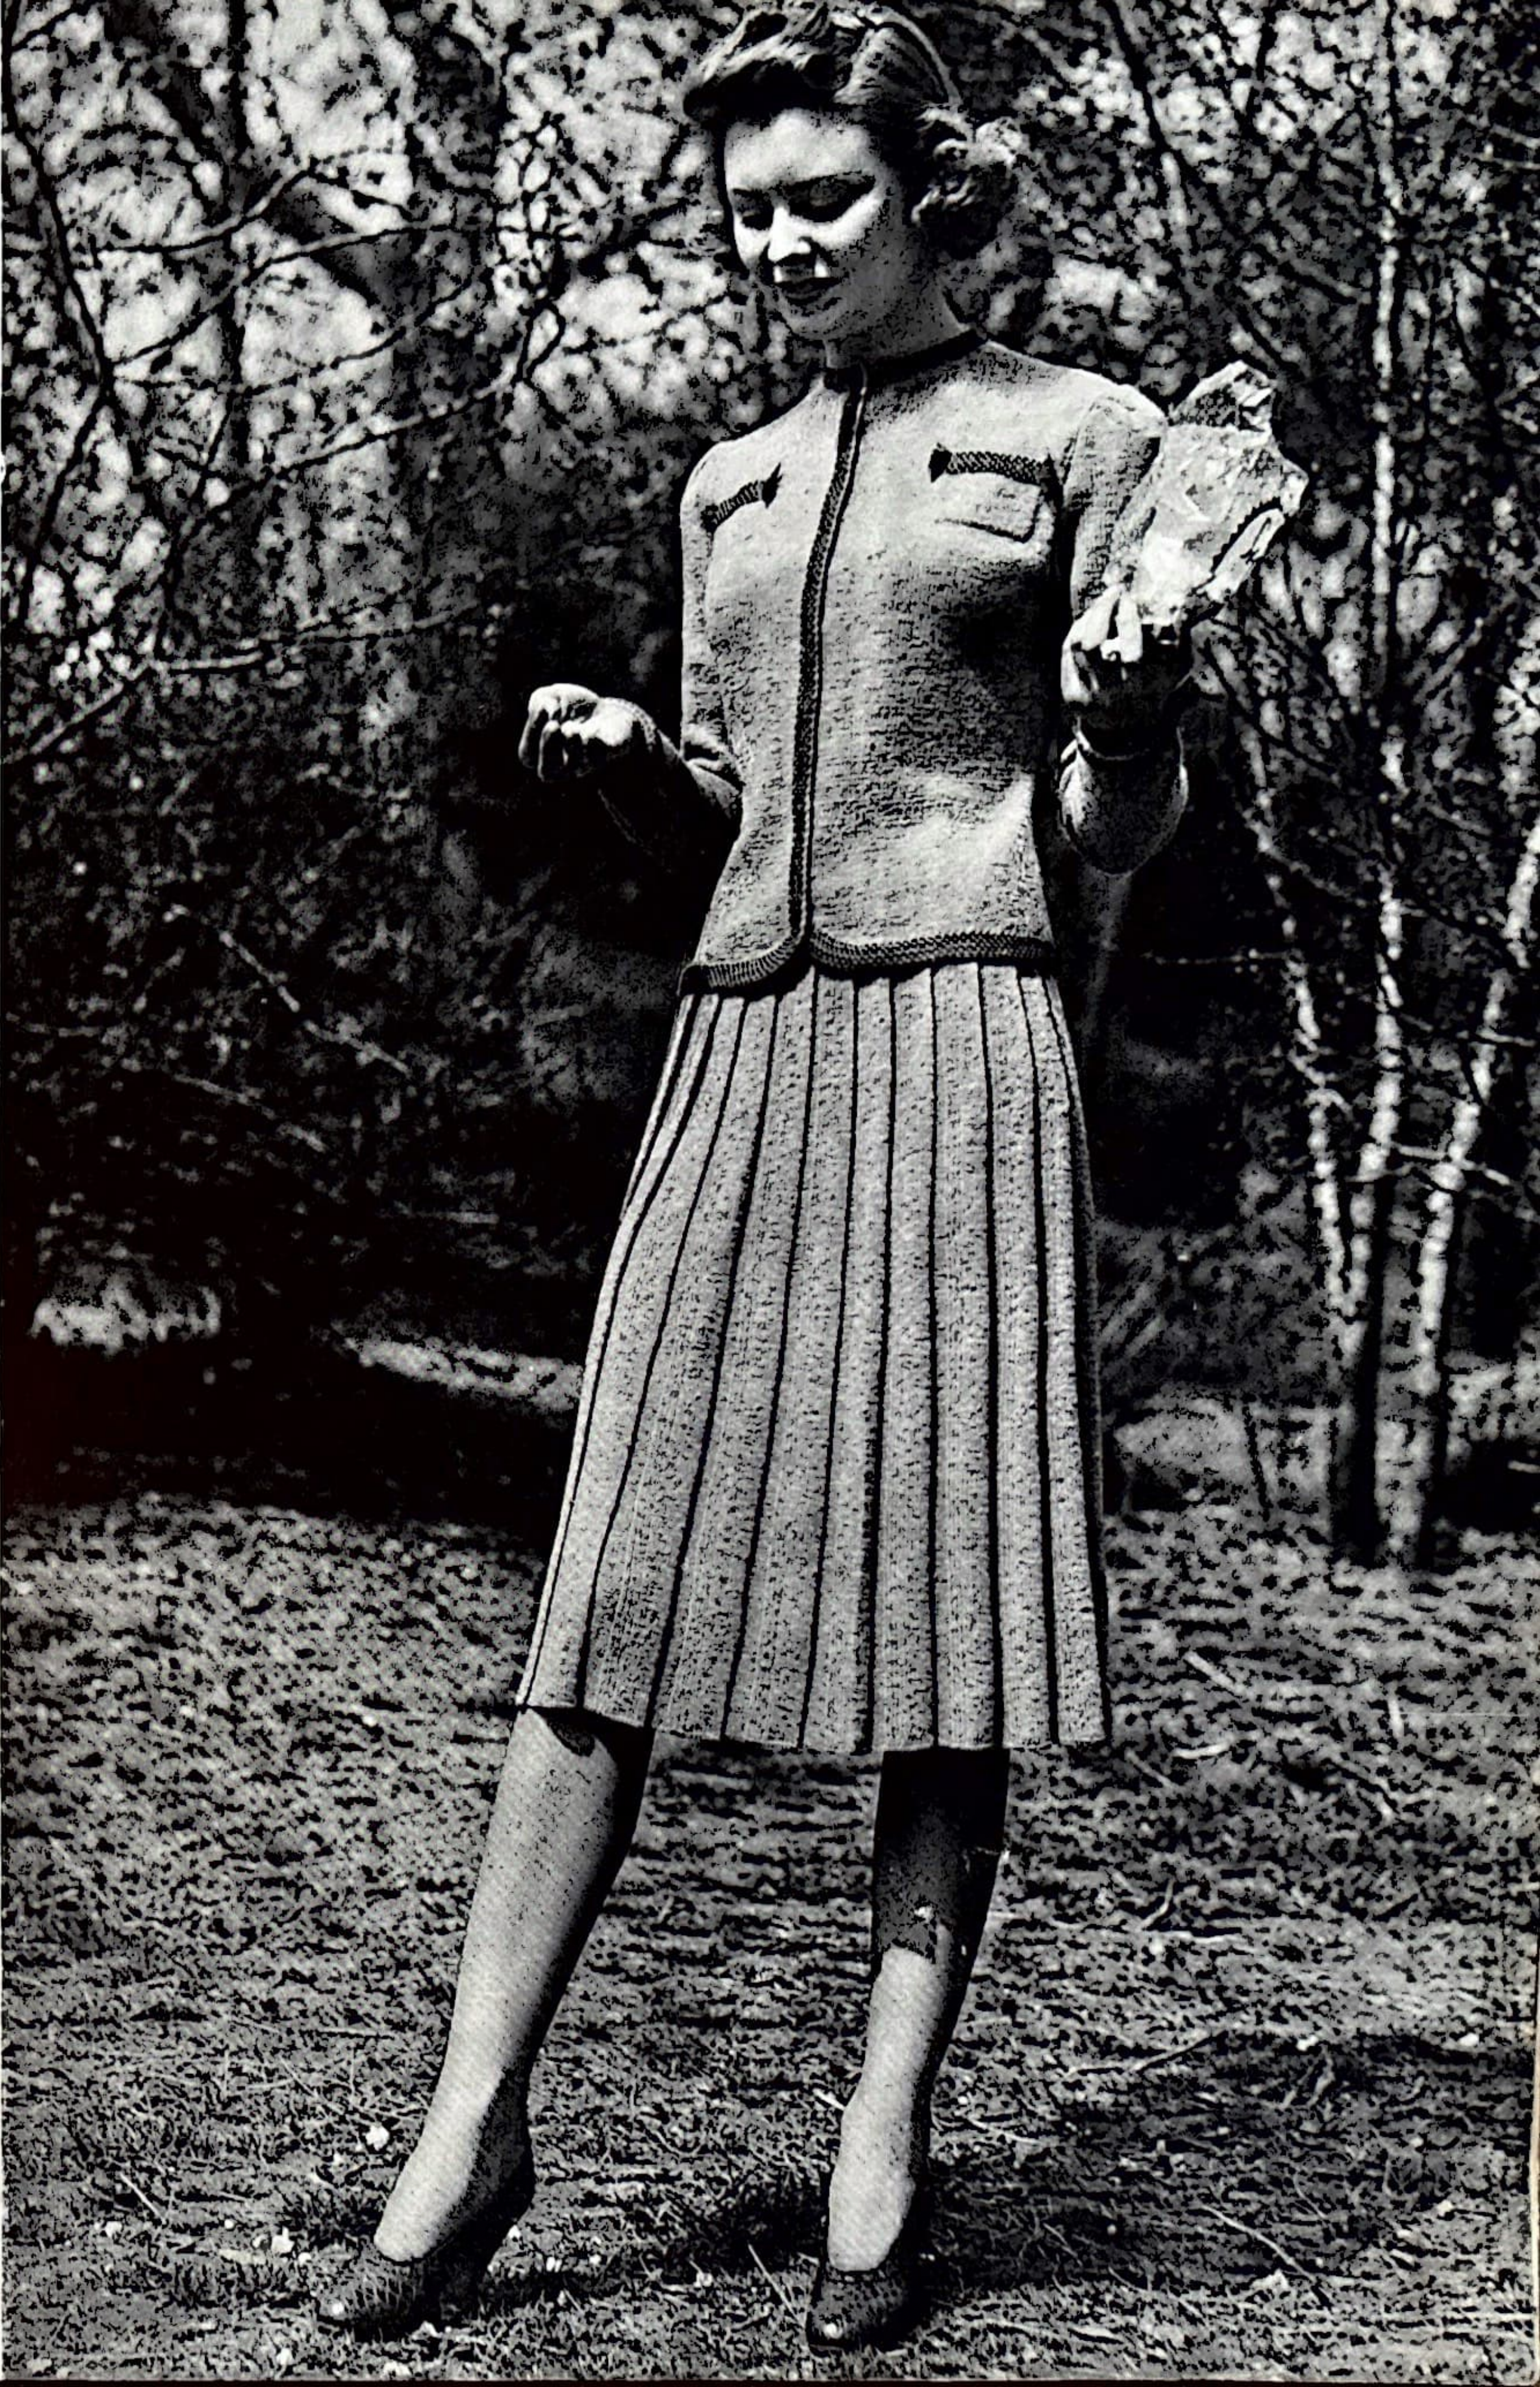

No. 1532

So Tailored the reefer acket suit

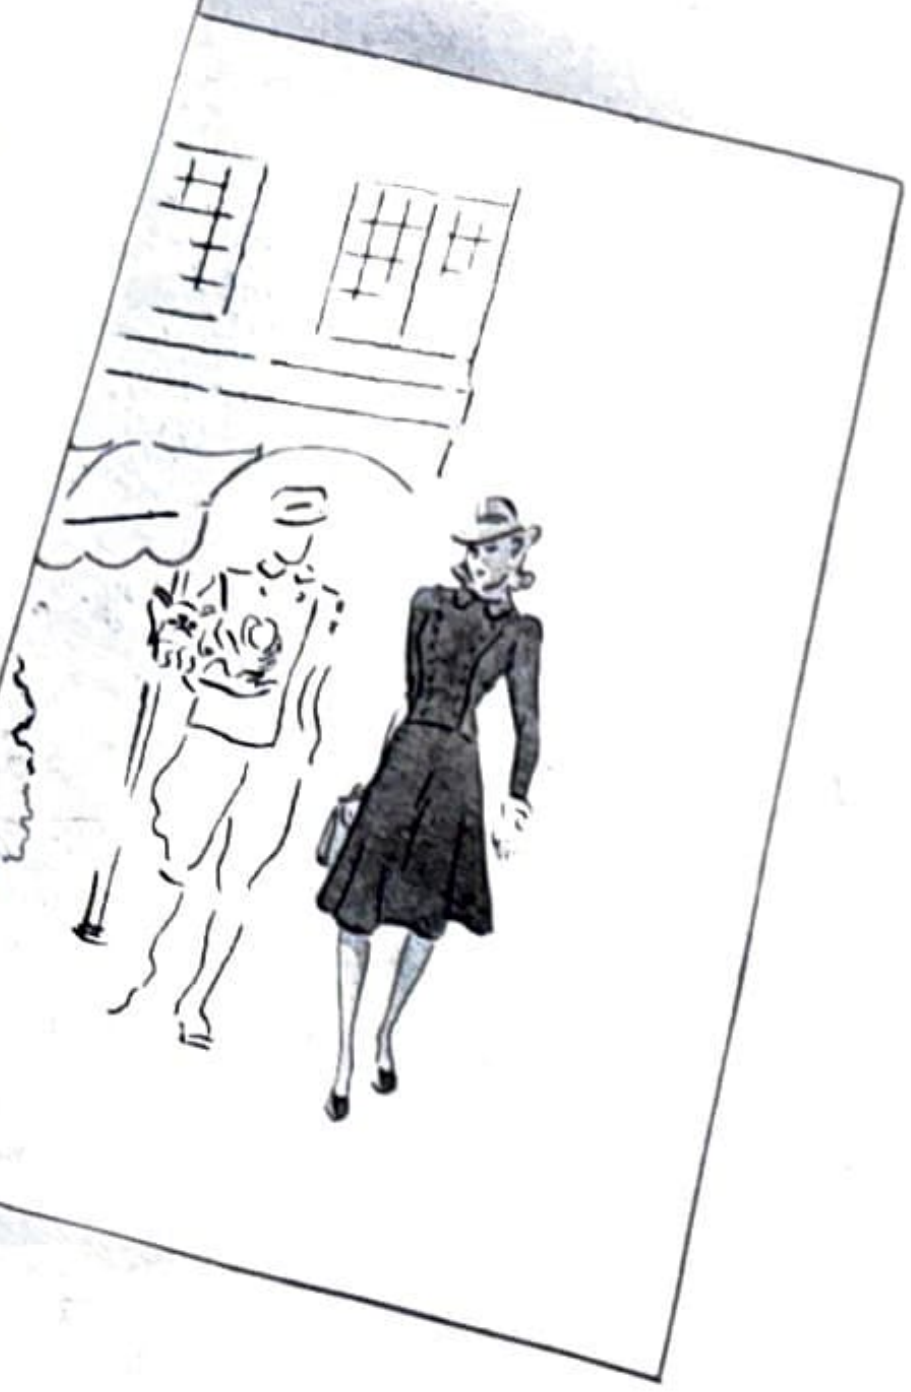

Reefer Jacket Suit No. 1529

Size 16

YARNS—Bear Brand or Bucilla Cassimere Sport Yarn†, 13 balls (Jacket 6 balls; Skirt 7 balls).

NEEDLES—Bucilla Sure-Fit 27-inch Circular Steel, Article 3496, Size 3.
1 pair Bucilla 14-inch Steel, Article 3499, Size 1.
Bucilla Steel Crochet Hook, Article 4300, Size 2.

TRIMMINGS—16 Metal Buttons ½ inch diameter.

IMPORTANT—Check your gauge first, see page 51.

JACKET

MEASUREMENTS FOR BLOCKED GARMENT

Bust 36 inches.
Width across back at underarm 17 inches.
Width across back at shoulders 13½ inches.
Width of each front at underarm 12 inches including 2½ inch lap.
Length from lower edge to underarm 10½ inches.
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 17½ inches.

GAUGE: Size 3 needle

Before Blocking—17 sts=2 inches	10 rows=1 inch
After Blocking—7 sts=1 inch	10 rows=1 inch

BACK—With circular needle cast on 108 sts for lower edge. Work back and forth.

Pattern—First row (right side) — * K 1, p 1, repeat from * to end. **2nd row**—K all sts.
These 2 rows form the pattern and are repeated for entire jacket. Continue pattern, decreasing 1 st each side every inch twice (104 sts). Work even until 2½ inches from lower edge.
Change to size 1 (straight) needles and work even until 4½ inches from lower edge.
Change back to circular needle. Increase 1 st each side of next row and repeat increases every ¾ inch 7 times, working increased sts in pattern (120 sts).
Work even until 10½ inches from lower edge.

Armholes—Bind off 8 sts at beginning of each of next 2 rows for underarm.
Decrease 1 st each side every 2nd row 8 times (88 sts).
Work even until 4 inches above underarm.
Increase 1 st each side of next row and repeat increases every inch twice (94 sts).
Work even until 7 inches above underarm.

Shoulders—Bind off 5 sts at beginning of each of next 12 rows (30 sts for each shoulder). Bind off remaining 34 sts for back of neck.

LEFT FRONT—With circular needle cast on 76 sts for lower edge. Work pattern as on back, decreasing 1 st at underarm edge (*beginning* of rows worked from *right* side) every inch twice (74 sts).
Work even until 2½ inches from lower edge, ending on right side at front edge.
Change to size 1 needles.
Next row—K 15 sts, k next (16th st) and mark for center front, k to end. Carry marking thread up entire length of front.
Work even until 3½ inches from lower edge, ending on right side at front edge.
Increase 1 st at beginning of next row (75 sts).
Work even until 4½ inches from lower edge.
Change back to circular needle.
Continue shaping underarm edge as on back, at the same time repeating increase at front edge (*beginning* of rows worked from *wrong* side) every 2 inches until same length as back to underarm, ending at underarm edge (86 sts).

Armhole—Bind off 8 sts at beginning of next row for underarm. Decrease 1 st at armhole edge every 2nd row 8 times, continuing to increase at front edge every 2 inches as before.
Keeping armhole edge even continue to increase at front edge (as before) until 4 inches above underarm, ending at armhole edge (72 sts).
* **Next row**—Increase 1 st in first st (armhole increase), work next 14 sts, work 3 sts tog (dart decrease), work to end *.
Continue to increase at front edge every 2 inches as before and repeat between *'s (increasing for armhole and decreasing for dart) every inch twice, ending at front edge (70 sts).

Neck Shaping—First row—K 15 sts, bind off the next 15 sts, k to end.
2nd row—Work 38 sts, work 2 tog (left neck edge), slip remaining sts to a strand of yarn.
Repeat decrease at left neck edge every row 3 times, then every 2nd row until 7 inches above underarm, decreasing for dart 1 inch above last dart decrease, do not increase at armhole edge.

Shoulder—Bind off 5 sts from armhole edge every 2nd row 6 times, continuing to decrease 1 st at neck edge every 2nd row until 8 sts in all have been decreased, then keep neck edge even.
Slip the 15 sts from strand of yarn to needle. Join yarn at neck edge.
First row—Work 2 sts tog, work to end.
Continue to shape right neck edge to correspond to left neck edge increasing at front edge 2 inches above last front increase.
Work even until there are as many rows on right side as on left side to last shoulder bind off.
Bind off remaining 8 sts.

(*Continued on Page* 45)

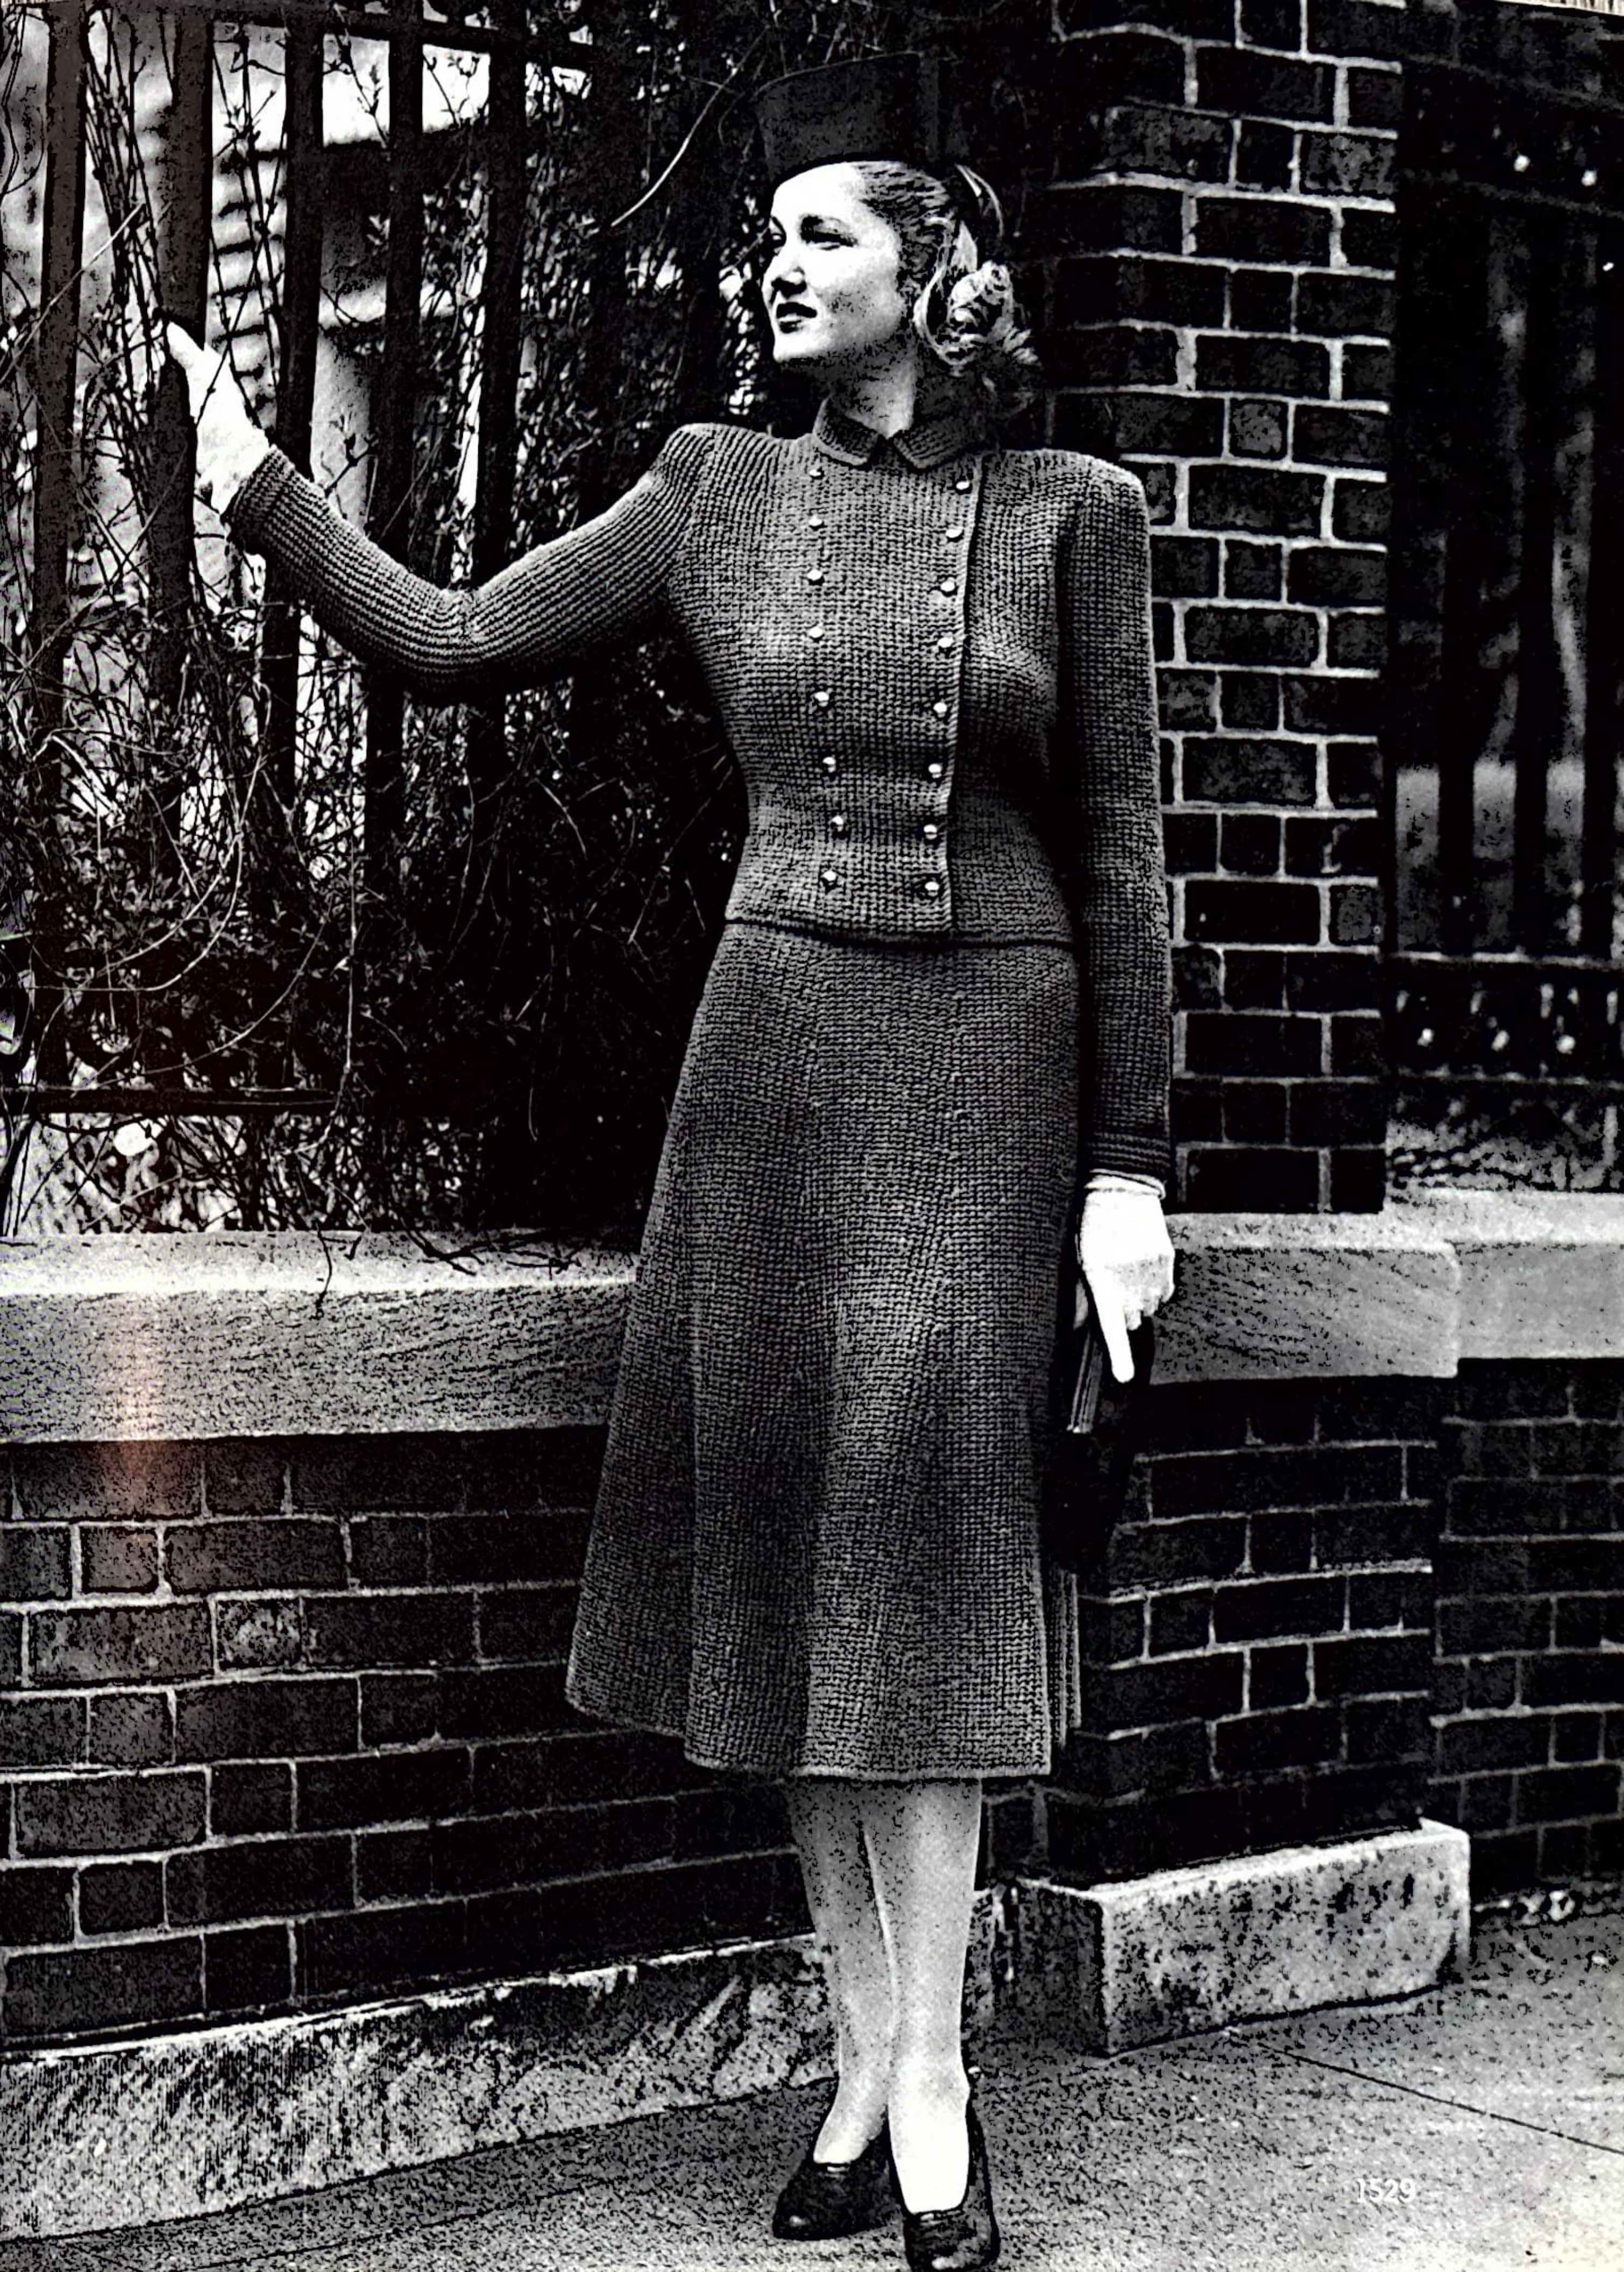
1529

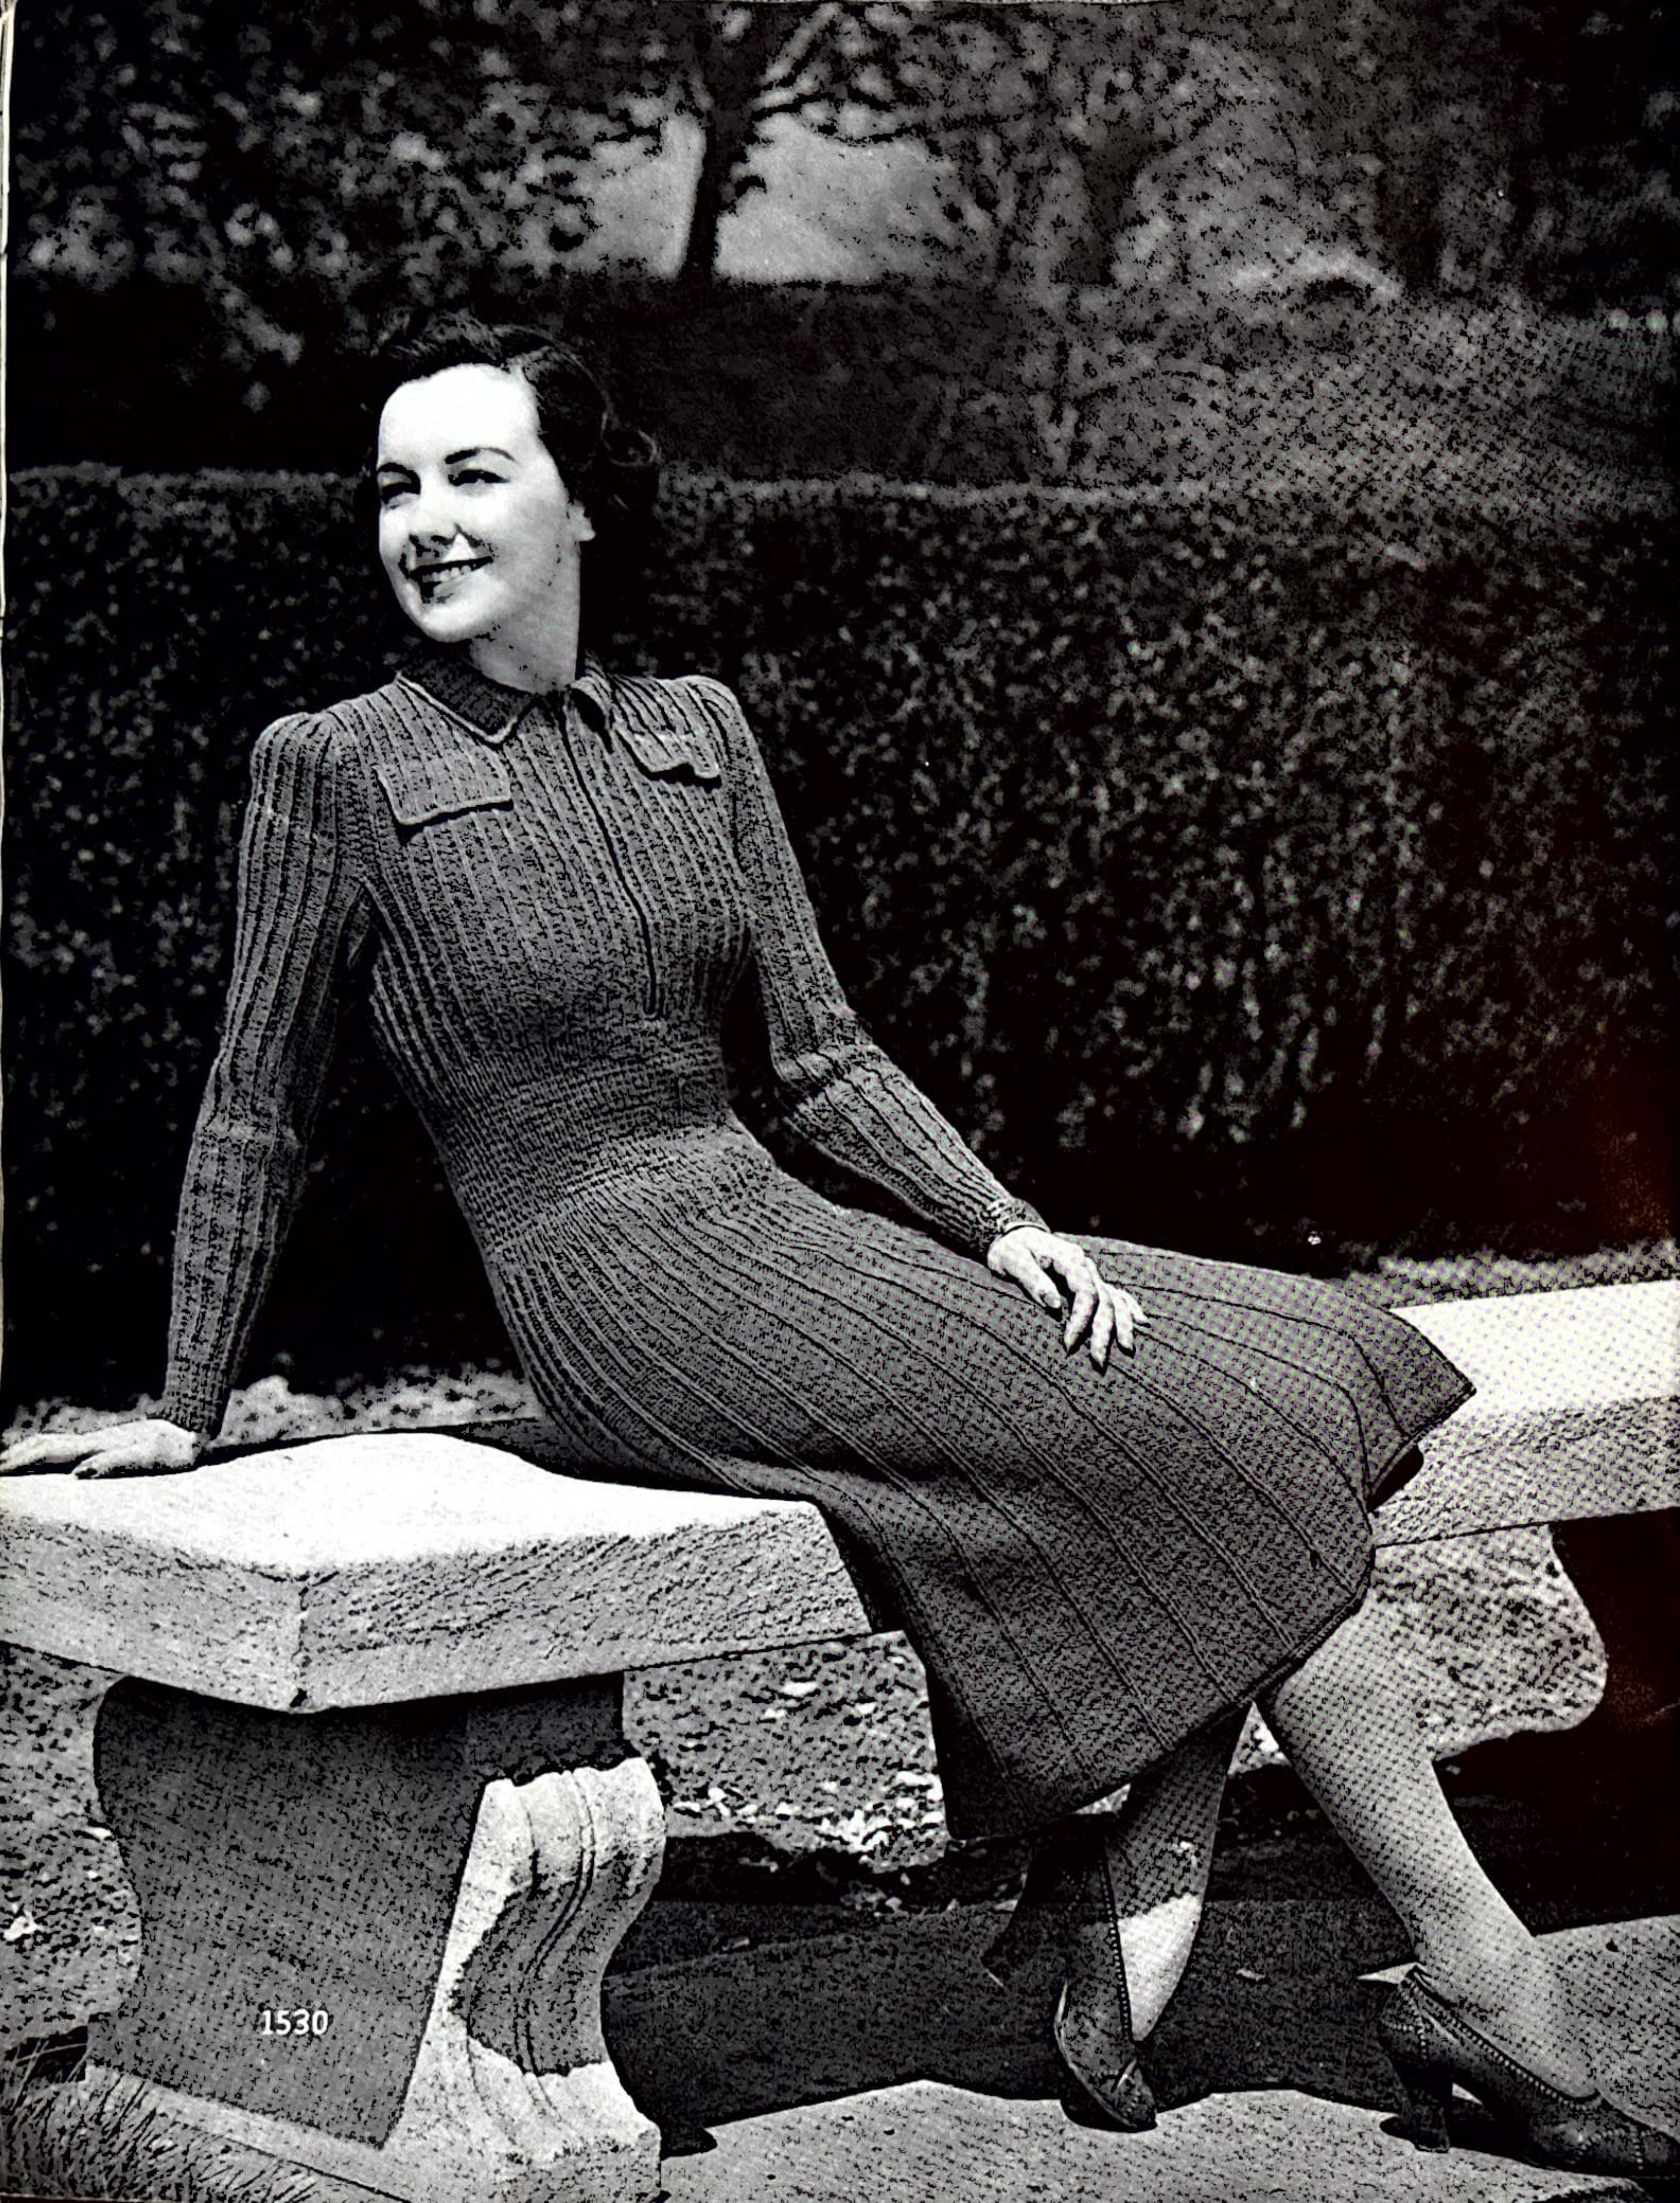
1530

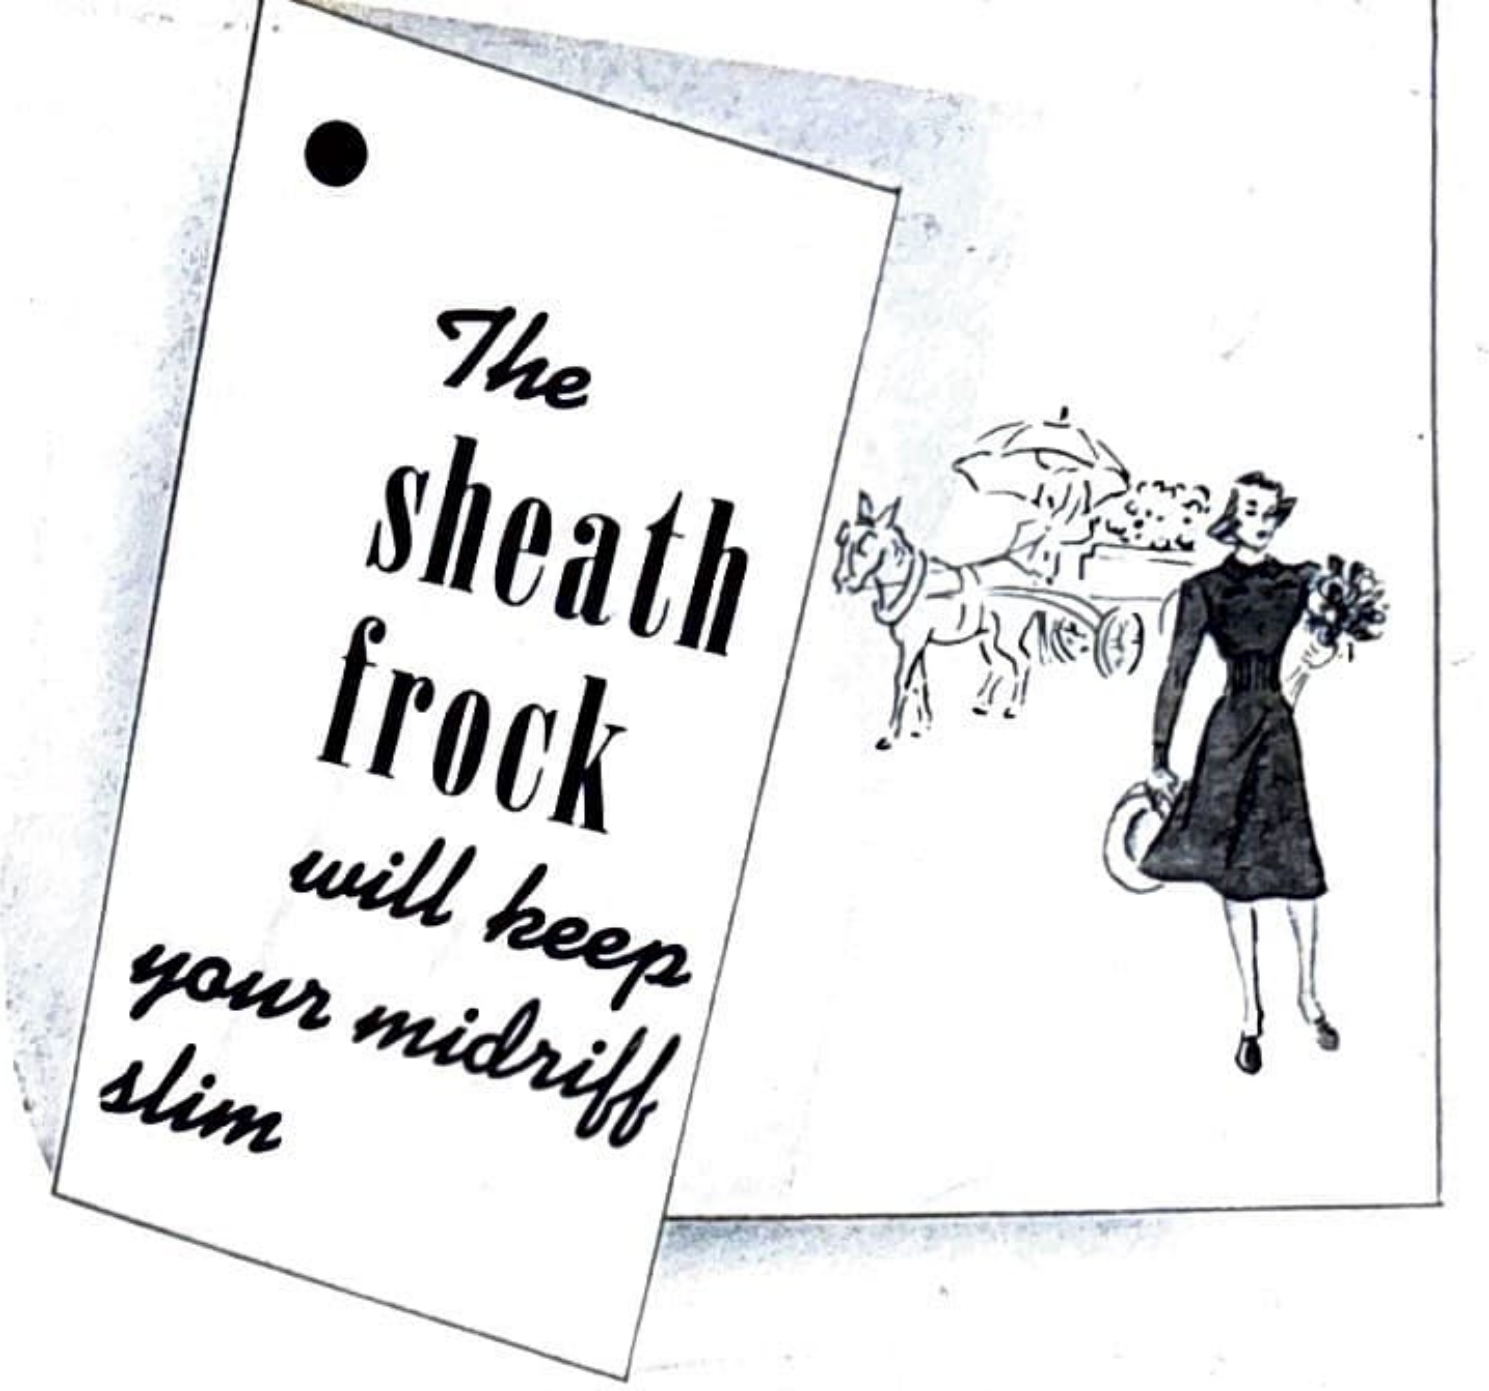
The sheath frock will keep your midriff slim

Sheath Frock No. 1530

Size 16

YARNS—Bear Brand or Bucilla Cassimere Sport Yarn†, 10 balls.

NEEDLES—Bucilla Sure-Fit 27-inch Circular Steel, Article 3496, Size 3.
Bucilla Sure-Fit 16-inch Circular Steel, Article 3493, Size 1.
Bucilla Steel Crochet Hook, Article 4300, Size 2.

TRIMMINGS—Talon Slide Fastener, Style 106, 10 inches long.

IMPORTANT—Check your gauge first, see page 51.

NOTE: Entire dress is worked in ribbing. Stretch each part to specified width when measuring length.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 59½ inches around.
Hipline (7 inches below normal Waistline) 37 inches.
Waistline 28 inches.
Length to normal Waistline 27½ inches (blocked).

WAIST

Bust 36¾ inches.
Width across back at underarm 17¼ inches.
Width across back at shoulders 14 inches.
Length from normal Waistline to underarm 8 inches.
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 17¼ inches.

GAUGE: Size 3 needle

7 sts = 1 inch
9 rounds = 1 inch

POCKET FLAPS—Work back and forth on circular needle.
With size 3 needle, cast on 26 sts for lower edge.
First row (wrong side)—P 1, * k 4, p 1, repeat from * across row.
2nd row—K 1, * p 4, k 1, repeat from * across row.
Repeat these 2 rows until flap measures 1½ inches, ending on right side. Break yarn, slip sts on holder.
Make another flap in same way.

SKIRT

With size 3 needle, cast on 416 sts for lower edge. Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting.
First round—* K 1, p 15, repeat from * around (26 k ribs and 26 p ribs).
Repeat first round until skirt measures 2½ inches.
First decrease round—* K 1, p 7, p 2 tog, p 6, repeat from * around (390 sts).
Next round—* K 1, p 14, repeat from * around.
Repeat last round until 5 inches from lower edge.
2nd decrease round—* K 1, p 6, p 2 tog, p 6, repeat from * around (364 sts).
Continue in this way to decrease 26 sts in a round (1 st at center of each p rib) every 2½ inches 3 times more, having 1 st less in each p rib after each successive decrease round (286 sts).
Work even with 10 sts in each p rib until 16½ inches from lower edge.
6th decrease round—* K 1, p 10, k 1, p 4, p 2 tog, p 4, repeat from *around (13 decreases; 273 sts).
Next round—*K 1, p 10, k 1, p 9, repeat from * around.
Repeat last round until 19½ inches, or 8 inches shorter than desired finished length.
7th decrease round—* K 1, p 4, p 2 tog, p 4, k 1, p 9, repeat from * around (260 sts at hipline).
Next round—* K 1, p 4, repeat from * around (52 k ribs and 52 p ribs). Repeat last round until 20½ inches from lower edge.
8th decrease round—* K 1, p 4, k 1, p 4, k 1, p 4, k 1, p 1, p 2 tog, p 1, repeat from * around (13 decreases; 247 sts).
Next round—* K 1, p 4, k 1, p 4, k 1, p 4, k 1, p 3, repeat from * around. Repeat last round until 21½ inches from lower edge.
9th decrease round—* K 1, p 4, k 1 p 4, k 1, p 1, p 2 tog, p 1, k 1, p 3, repeat from * around (234 sts).
Next round—* K 1, p 4, k 1, p 4, k 1, p 3, k 1, p 3, repeat from * around.
Repeat last round until 22½ inches from lower edge.
10th decrease round—* K 1, p 4, k 1, p 1, p 2 tog, p 1, k 1, p 3, k 1, p 3, repeat from * around (221 sts).
Next round—* K 1, p 4, k 1, p 3, k 1, p 3, k 1, p 3, repeat from * around.
Repeat last round until 23½ inches from lower edge.
11th decrease round—* K 1, p 1, p 2 tog, p 1, k 1, p 3, k 1, p 3, k 1, p 3, repeat from * around (208 sts).

WAISTBAND—Change to size 1 needle.
Next round—* K 1, p 1, repeat from * around.
Repeat last round for 3 inches (26½ inches from lower edge).
Mark this point as normal waistline.

WAIST

Continue ribbing of k 1, p 1 until waistband measures 6 inches (29½ inches from lower edge).
This completes waistband. Change back to size 3 needle.
Next round—* K 1, p 3 *, repeat between *'s 12 times, k 1, p 2, p 2 tog (center front), p 3, repeat between *'s to end of round (left underarm).
Next round—* K 1, p 3, repeat from * 13 times to center front.
Remainder of waist is worked back and forth on size 3 needle.
Next row—Turn, working from wrong side, k 3, * p 1, k 3, repeat from * to end of row (center front).

(*Continued on Page* 46)

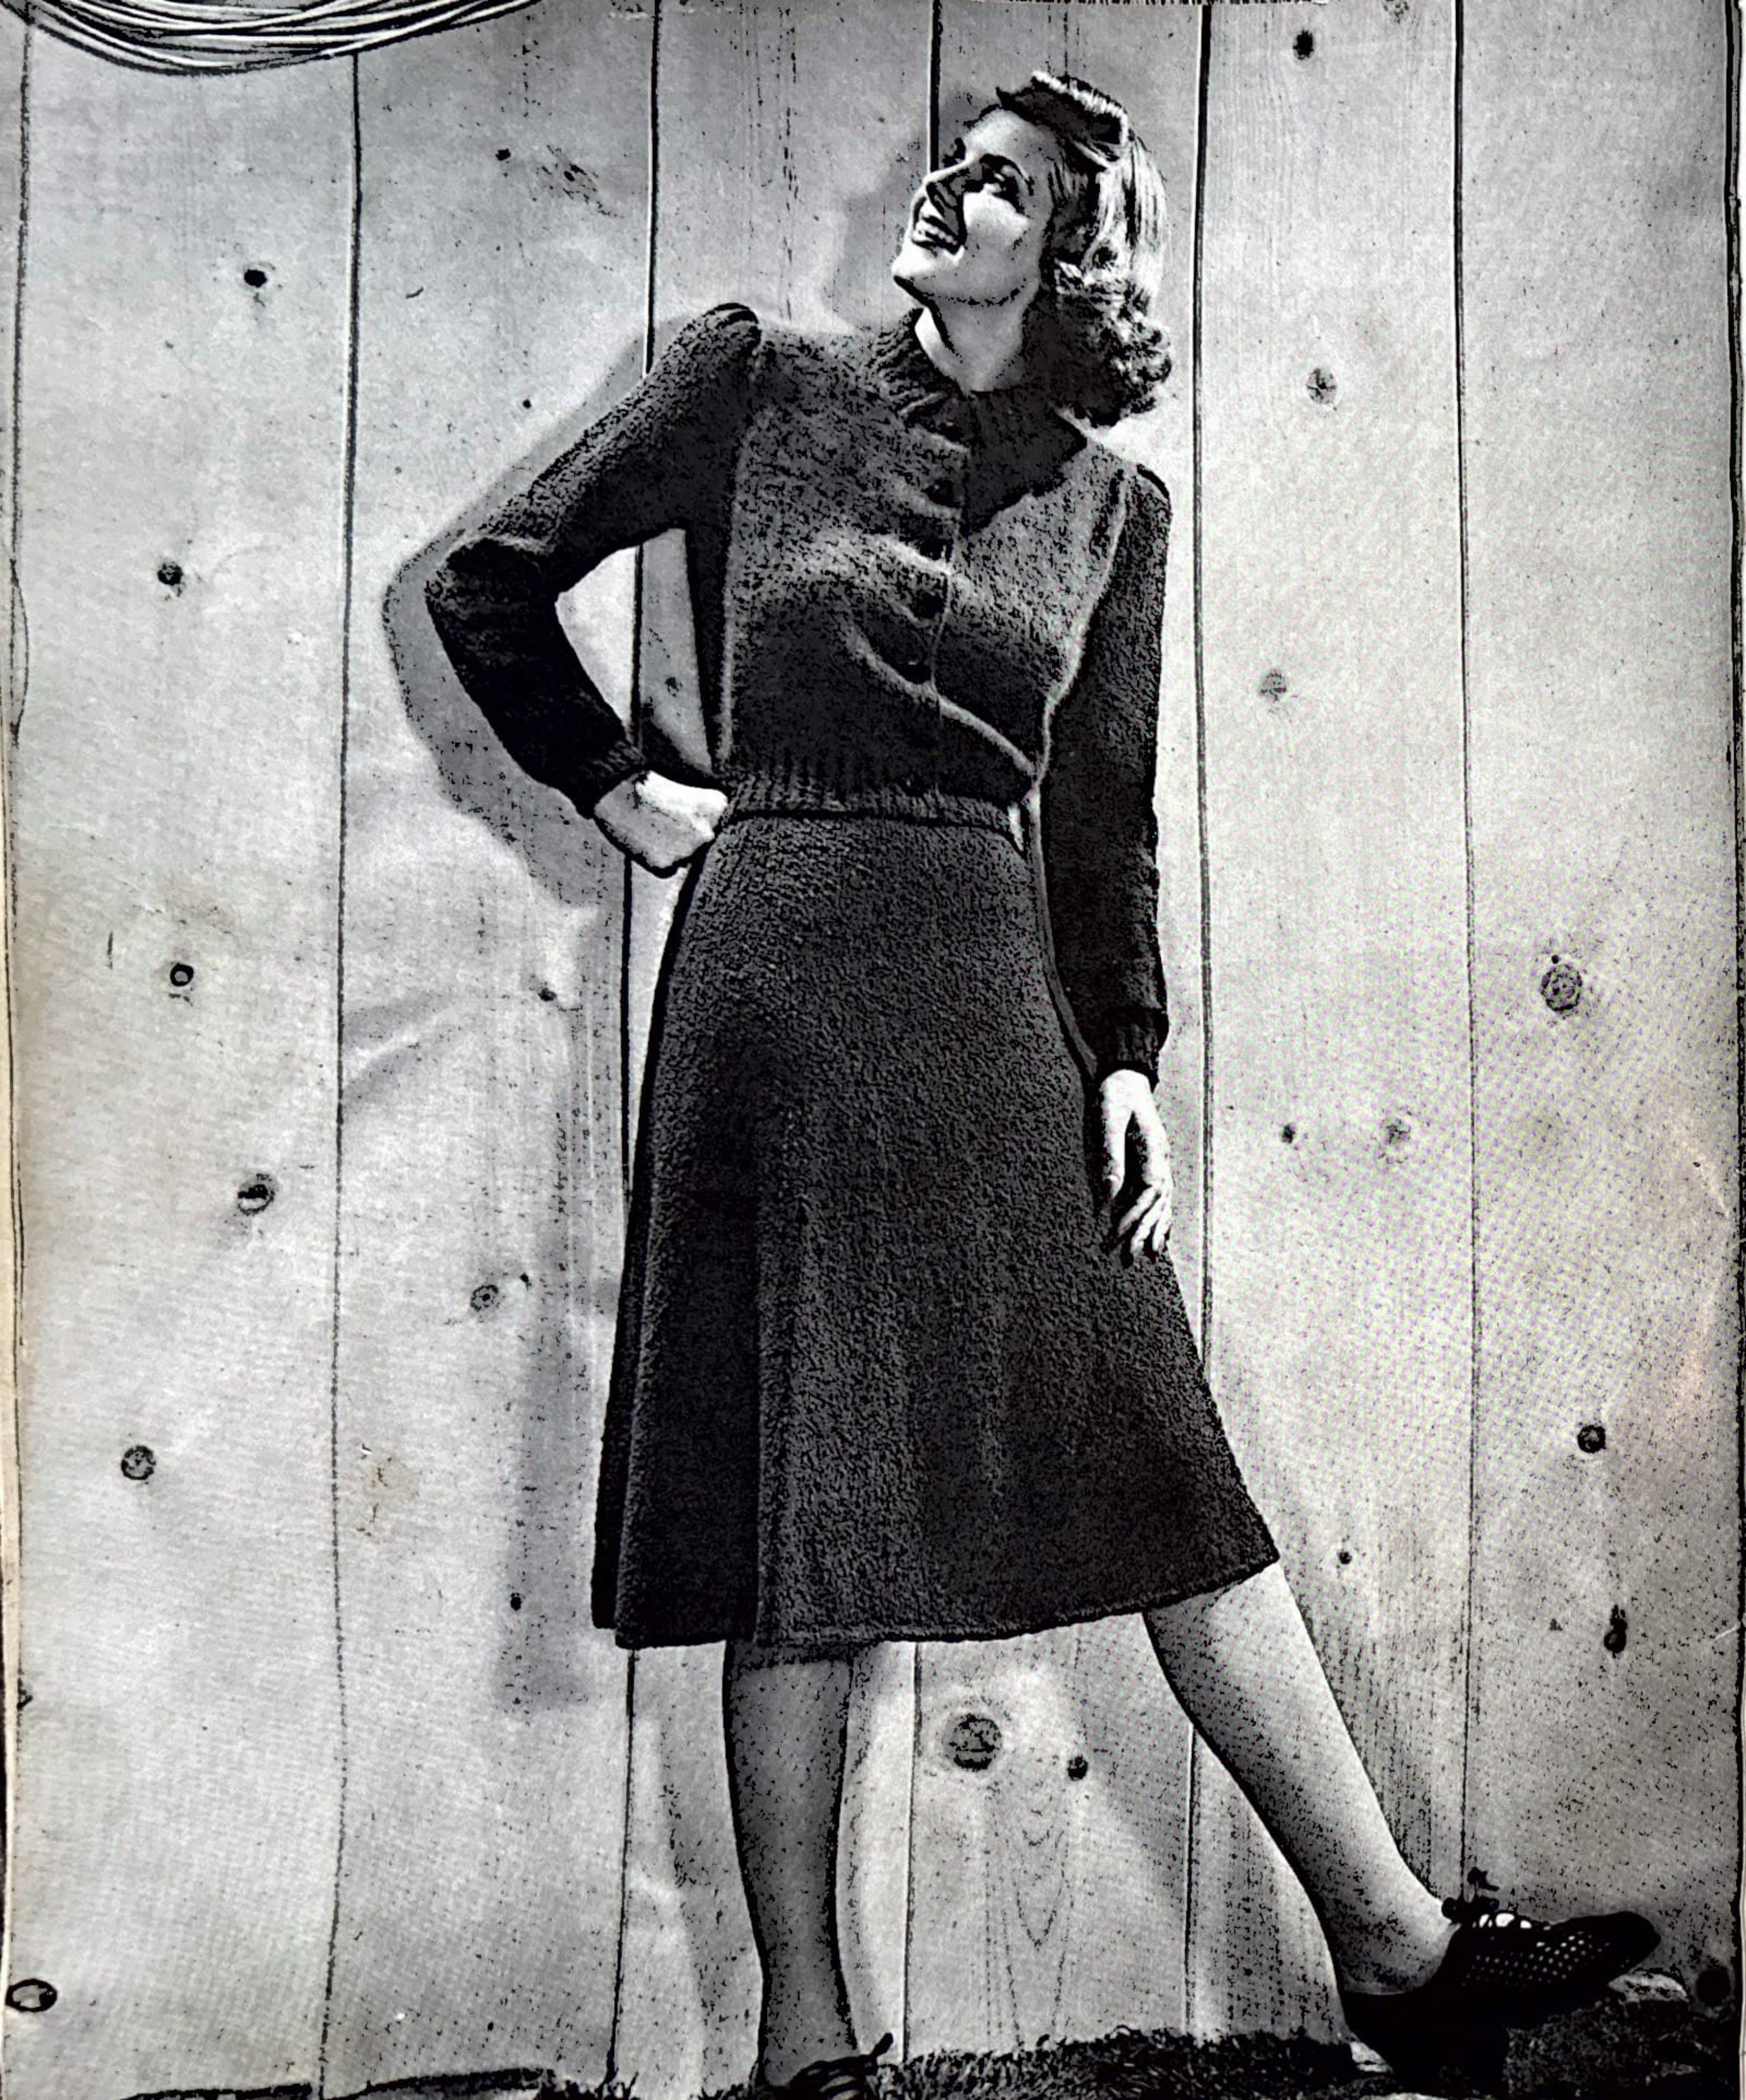

Woodchopper Dress No. 1534

Size 16

YARNS—Bear Brand or Bucilla Cobble Crepe†, 21 balls (Blouse 7 balls, Skirt 14 balls).
Bear Brand or Bucilla Sport Angora, 8 balls (Blouse).

NEEDLES—Bucilla Sure-Fit 27-inch Circular Steel, Article 3496, Size 2.
1 pair Bucilla 14-inch Steel, Article 3499, Size 1.
1 pair Bucilla 14-inch White, Article 3846, Size 5.
Bucilla Steel Crochet Hook, Article 4300, Size 2.

TRIMMINGS—7 Oval Buttons ⅞ inch long.

IMPORTANT—Check your gauge first, see page 51.

BLOUSE

MEASUREMENTS FOR FINISHED GARMENT

Width across back at underarm 17½ inches.
Width across back at shoulders 12½ inches.
Width of each front at underarm 10½ inches.
Length from lower edge to underarm 12 inches.
Sleeves—Width below underarm 13 inches.
Length from lower edge to underarm 18½ inches.

GAUGE:

Sport Angora (double)—6 sts = 1 inch 8 rows = 1 inch
Cobble Crepe—Size 2 needle—
7 sts = 1 inch 11 rows = 1 inch

BACK—With Cobble Crepe and size 1 needles cast on 104 sts loosely for lower edge.
First row—* K 2, p 2; repeat from * to end of row. Repeat this row until 3 inches from lower edge. Break Cobble Crepe.
Change to white needles. Join 2 strands of Angora, work stockinette st (k 1 row, p 1 row) until 12 inches from lower edge.

Armholes—Bind off 7 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 7 times (76 sts). Work even until armholes measure 6½ inches above underarm.

Shoulders—Bind off 4 sts at beginning of each of next 12 rows (24 sts for each shoulder). Bind off remaining 28 sts for back of neck.

LEFT FRONT—With Cobble Crepe and size 1 needles cast on 64 sts loosely for lower edge.
Work ribbing as on back for same number of rows as on back. Break Cobble Crepe. Change to white needles. Join 2 strands of Angora. Work stockinette st until same length as back to underarm, ending with a p row.

Armhole—Bind off 9 sts at beginning of next row for underarm. Decrease 1 st at armhole edge every 2nd row 8 times (47 sts). Work even until 6 inches above underarm, ending with a k row.

Neck Shaping and Shoulder—Bind off 12 sts as to p at beginning of next row for neck edge, work to end. Decrease 2 sts (k 2 tog twice) at end of next row (neck edge); then decrease 1 st at neck edge *every* row, keeping armhole edge even until 7 inches above underarm.

Shape shoulder as on back at beginning of rows worked from armhole edge, continuing to decrease at neck edge *every* row until 11 sts are decreased in all.

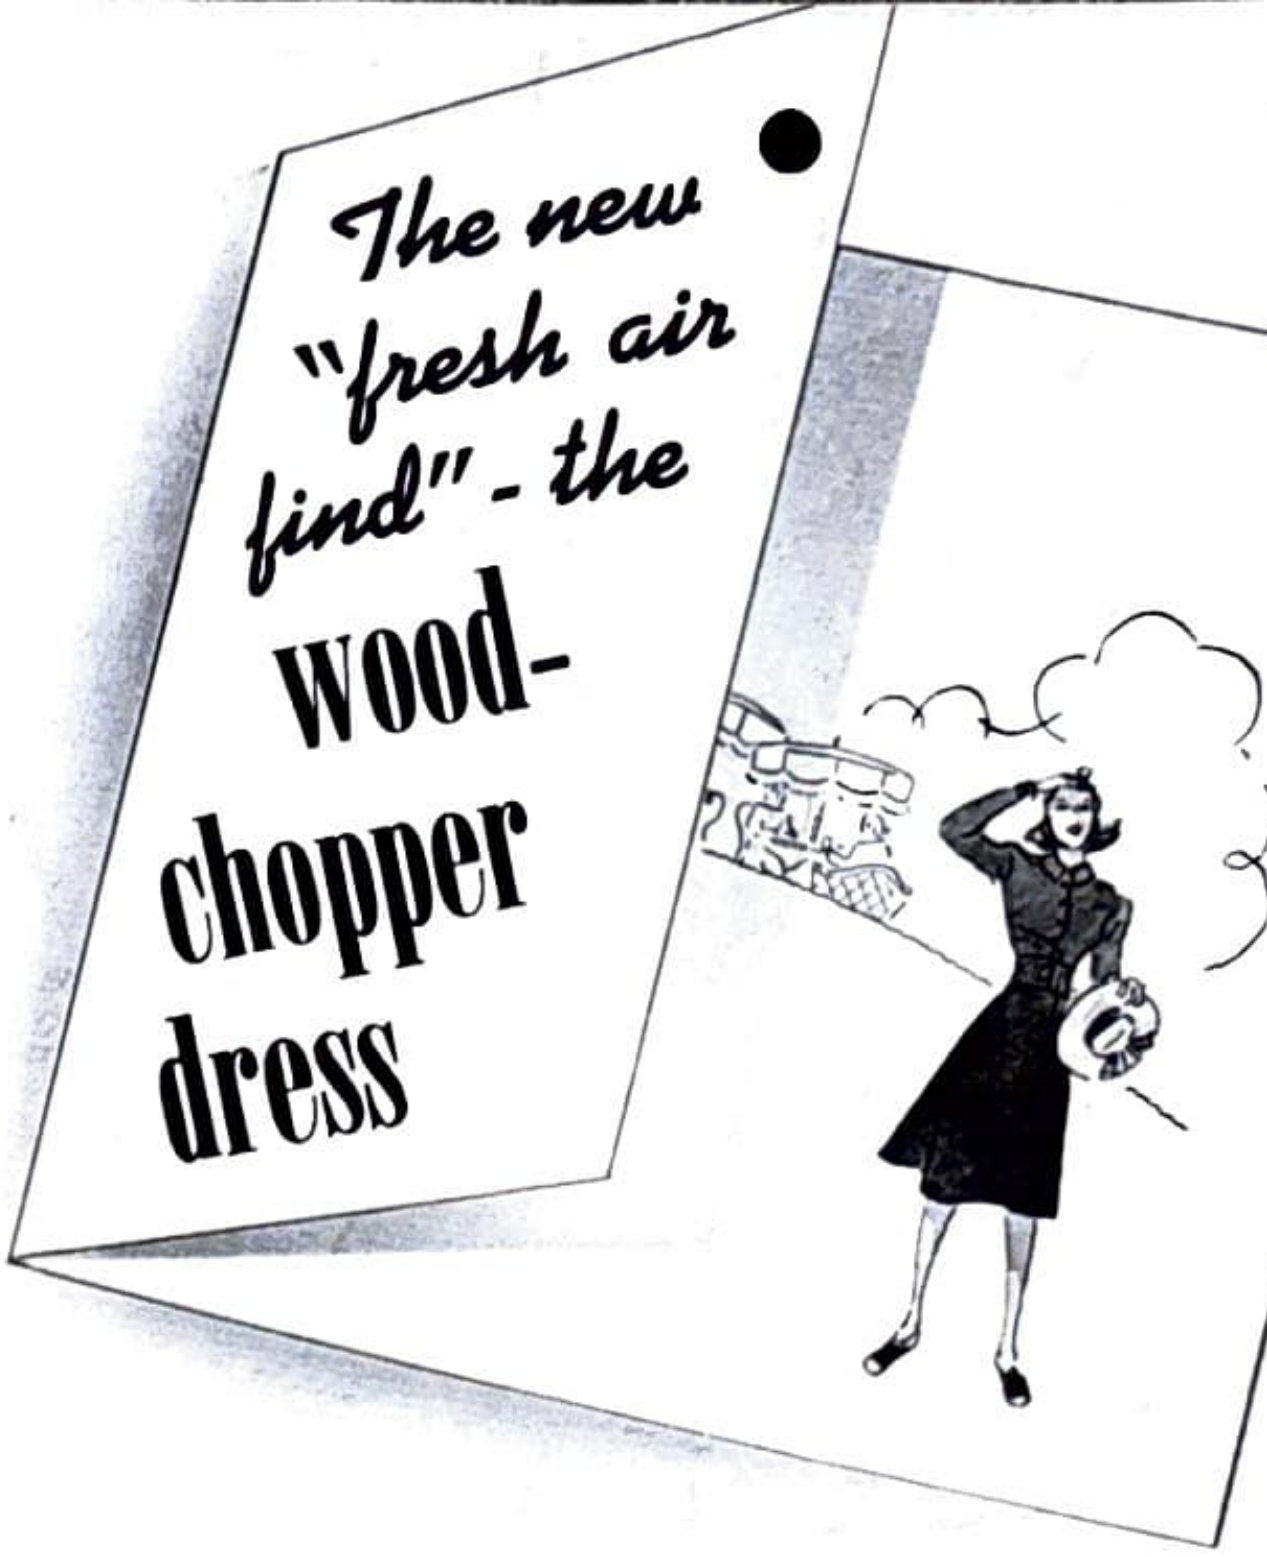

RIGHT FRONT—With Cobble Crepe and size 1 needles cast on 64 sts loosely for lower edge. Work ribbing as on back for 1½ inches (an even number of rows).
Next row—Work 3 sts, bind off 6 sts for buttonhole, work to end.
On next row cast on 6 sts over the bound-off sts.
Work ribbing until even with ribbing on left front, ending at front edge. Change to white needles.
Join 2 strands of Angora. Work stockinette st (k 1 row, p 1 row) for 1 inch, ending with a p row.
Next row—2nd buttonhole—K 2, bind off 5 sts, k to end.
On next row cast on 5 sts over the bound-off sts.
Work to correspond to left front, repeating 2nd buttonhole every 2½ inches (including previous buttonhole rows) 5 times, binding off for armhole at beginning of a p row and for neck edge at beginning of a k row.
NOTE: 7th buttonhole should be 1½ inches below neck edge. Complete to correspond to left front.

SLEEVES—Sleeves are worked back and forth.
With Cobble Crepe and size 1 needles cast on 56 sts loosely for lower edge. Work ribbing as on back for 2 inches. Change to circular needle. K 1 row, increasing 1 st in every 4th st 14 times (70 sts). P 1 row and continue stockinette st, increasing 1 st each side every 1½ inches 9 times; every inch twice (92 sts). Work even until 18½ inches from lower edge, ending on right side. Bind off 8 sts at beginning of each of next 2 rows. Decrease 1 st each side every 2nd row twice; every 8th row 6 times; every 2nd row twice. Bind off 3 sts at beginning of each of next 8 rows. Bind off remaining 32 sts. Make other sleeve in same way.

COLLAR—With Cobble Crepe and size 1 needles cast on 106 sts for neck edge.
First row (right side)—K 2, * p 2, k 2; repeat from * to end.
2nd row—P 2, * k 2, p 2; repeat from * to end.
Repeat these 2 rows until 1 inch from lower edge.
Change to circular needle and continue ribbing until 2½ inches from lower edge. Bind off as to k and p.
Working from right side, work 1 row s c on short sides, working 1 s c in end of every 2nd row.

FINISHING—Sew seams. Sew sleeves to armholes, with sleeve seam at center underarm and extra fullness of sleeve folded into a box pleat 1 inch wide at shoulder seam and a side pleat ½ inch each side of box pleat. With right side of collar to wrong side of blouse, center of cast-on edge of collar to center back of neck and ends of collar ¾ inch from front edges, sew collar to neck edge.

With Cobble Crepe, beginning at lower end of right front, work s c to top of ribbing, taking off 2 loops of last s c with 2 strands of Angora; continue s c to top, keeping work flat. Fasten off. Join Cobble Crepe in first s c and work 1 s c in each s c of row below to top of ribbing, join Angora and work 1 s c in each s c to neck edge, 3 s c in corner at neck edge, work s c to joining of collar. Fasten off.

Join 2 strands of Angora at neck edge of left front and work 2 rows s c to correspond to right front.

Work buttonholes in buttonhole st, using a single strand of Angora for buttonholes in Angora and Cobble Crepe for buttonhole in Cobble Crepe.

Steam, see page 51.

Sew buttons to left front opposite buttonholes.

Sew 1 snap fastener to top of front edge under collar and 1 snap fastener to lower end of front edges.

Buy or make shoulder pads No. 4, see page 47 and sew to armholes.

SKIRT

MEASUREMENTS FOR BLOCKED GARMENT

Width at lower edge 73 inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 28 inches.
Length 27 inches, blocked.

GAUGE: 7 sts=1 inch   11 rounds=1 inch

With Cobble Crepe and circular needle cast on 512 sts for lower edge. Join, taking care sts do not twist on needle. K 1½ inches.

First decrease round—* K 2 tog, k 59, k 2 tog, k 1 (mark last st for gore st); repeat from * 7 times (496 sts, 1 st decreased each side of the 8 gore sts). K 1 inch even (including previous decrease round). Carry up the gore markings. Mark 3rd gore for center front and 7th gore for center back.

2nd decrease round—Decrease 1 st each side of each of the 8 gore sts, working 2 sts less between decreases in each gore (480 sts).

Continue to decrease 16 sts in a round as for 2nd decrease round every inch 9 times more; then every 1½ inches 4 times, always including the previous decrease round in part worked even (272 sts).

K until 19 inches from lower edge or 8 inches shorter than desired blocked length.

16th decrease round—Decrease only 12 sts in a round, omitting decreases in the center front and center back gores (260 sts, 37 inches at hipline). Discontinue gore markings. K 1½ inches even.

17th decrease round—* K 18, k 2 tog; repeat from * around (13 sts decreased; 247 sts). K 1½ inches even. Decrease 13 sts in next round as for 17th decrease round and repeat every inch 3 times, always working 1 st less before decreases in each successive decrease round (195 sts).

K even until 26 inches from lower edge. Bind off. Do not break yarn.

Casing for Elastic—Work as for skirts, see page 51.

FINISHING—Work 2 rows s c around lower edge of skirt, keeping work flat. Fasten off.

Block, see page 51, stretching to 27 inches in length. Insert elastic in casing.

Cardigan No. 1537

(Shown on Front Cover)

Size 16

YARNS — Bear Brand or Bucilla Tricolaine†, 6 skeins Main Color, 3 skeins Contrasting Color.

NEEDLES—1 pair Bucilla 14-inch Steel, Article 3499, Size 1.
1 pair Bucilla 14-inch Aluminum, Article 3499, Size 3.
Bucilla Steel Crochet Hook, Article 4300, Size 1.

TRIMMINGS—11 Buttons ½ inch diameter.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT

Width across back at underarm 16¼ inches.
Width across back at shoulders 13¼ inches.
Width across each front at underarm 10¼ inches, including buttonhole band.
Length from lower edge to underarm 9¾ inches.
Sleeves—Width below underarm 14 inches.
Length from lower edge to underarm 5 inches.

GAUGE:

Large Needles—13 sts=2 inches   10 rows=1 inch

Entire cardigan is worked in ribbing.

BACK—With main color (m c) and small needles, cast on 94 sts for lower edge.

First row (wrong side)—P 2, * k 2, p 2, repeat from * across row.

2nd row—K 2, * p 2, k 2, repeat from * across row. Repeat these 2 rows until 2½ inches from lower edge, ending on right side.

Change to large needles. Increase 1 st each side every 8th row 6 times, working increased sts in ribbing (106 sts).

Work even until 9¾ inches from lower edge, ending on right side.

Armholes—Bind off 5 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 5 times (86 sts).

Work 12 rows even, ending on right side.

Yoke—Break m c; join contrasting color (c c).

First row (wrong side)—Purl.

2nd row—K 2, * p 2, k 2 repeat from * across row.

Work ribbing for remainder of yoke.

Work even until 6¾ inches above underarm.

Shoulders—Bind off 4 sts at beginning of each of next 14 rows, knitting the k sts and purling the p sts (28 sts for each shoulder).

Bind off remaining 30 sts for back of neck.

POCKET LININGS—With c c and large needles, cast on 26 sts for lower edge.

Work ribbing as on back for 2½ inches, ending on right side. Break yarn and slip sts to a strand of yarn.

Make other pocket lining in same way.

RIGHT FRONT—With m c and small needles, cast on 56 sts for lower edge.

First row (wrong side)—* K 2, p 2, repeat from * across row (front edge). Repeat this row until same number of rows as on back on small needles, ending on right side.

Change to large needles. Increase 1 st at underarm edge at end of every 8th row 6 times (62 sts).
Work even until same number of rows as on back up to underarm, ending on right side at underarm edge.

Armhole and Neck Shaping—Bind off 8 sts at beginning of next row for underarm. Keeping front edge even, decrease 1 st at armhole edge every 2nd row 8 times, ending at front edge (46 sts).
Next row—Work 24 sts, bind off 2 sts for buttonhole, work across row.
Next row — Work across row, casting on 2 sts over bound-off sts.
Work 4 rows even, ending at front edge.
Next row — Work 12 sts, bind off 26 sts for pocket opening, work across row.
Yoke—Break m c; join c c.
First row (wrong side) — P 8, slip 26 sts of pocket lining to left hand needle, with right side of pocket to wrong side of cardigan, work ribbing across these 26 sts and p remaining 12 sts.
Work even in ribbing on these 46 sts until 5 inches above underarm, ending at front edge.
Bind off 6 sts at beginning of next row for neck edge. Decrease 1 st at neck edge every 2nd row, keeping armhole edge even until 6¾ inches above underarm.

Shoulder—Bind off 4 sts at armhole edge every 2nd row 7 times, continuing to decrease at neck edge as before until there are 12 decreases in all, then work even. Fasten off.

LEFT FRONT—With m c and small needles, cast on 56 sts for lower edge.
First row (wrong side)—* P 2, k 2, repeat from * across row (underarm edge).
Work to correspond to right front up to last armhole decrease, binding off for underarm at beginning of a row worked from right side and ending at armhole edge.
Next row—K 2 tog (last armhole decrease), work 19 sts, bind off 2 sts for buttonhole, work across row.
Next row—Cast on 2 sts over 2 bound-off sts.
Work 4 rows even, ending at armhole edge.
Next row—Work 8 sts, bind off 26 sts for pocket opening, work across row. Finish yoke to correspond to right front, binding off for neck at beginning of a row worked from wrong side.

SLEEVES—With m c and small needles, cast on 74 sts for lower edge.
Work ribbing as on back for 1 inch, ending on right side.
Change to large needles.
Increase 1 st each side every 4th row 8 times (90 sts).
Work even until 5 inches from lower edge.
Bind off 6 sts at beginning of each of next 2 rows for underarm.
Decrease 1 st each side every 2nd row 8 times (62 sts).
Work even until 4½ inches above underarm.
Decrease 1 st each side of next row.
Work 1 row even.
Decrease 1 st each side of next row.
Bind off 2 sts at beginning of each of next 8 rows, then 3 sts at beginning of each of next 4 rows.
Bind off remaining 30 sts.
Make other sleeve in same may.

FINISHING — Sew seams. Sew sleeves to armholes with sleeve seam at center underarm, holding in extra fullness at top.
Sew edges of pocket lining to wrong side of each front.

BUTTONHOLE BAND—Join c c on right front at lower edge, leaving a 12-inch end.
First row—Working from right side, work 16 s c on 2½ inches of front edge worked with small needles and 81 s c up to neck edge (about 2 s c in every 3 rows).
2nd row—Ch 1, turn, work 1 s c in each of 97 sts of row below.
3rd row—Ch 1, turn, work 1 s c in each of first 5 sts, * ch 2, skip 2 sts for buttonhole, 1 s c in each of next 9 sts, repeat from * 8 times, ending last repeat 1 s c in each of last 2 sts (9 buttonholes in all).
4th row—Same as 2nd row .
5th row—Same as 2nd row, working 3 s c at corner, 1 s c in each row on end of band; join. Fasten off.
Using 12-inch end of yarn, work 1 s c in each row on end of band; join. Fasten off.
Join c c on left front at neck edge, leaving a 12-inch end.
Work 5 rows s c to correspond to buttonhole band, omitting buttonholes and work s c on each end of band.

NECK BAND AND TIE—**First row**—With c c, ch 55 for right tie, leaving a 12 inch end. Join on right neck edge in first row s c, working from right side, work 1 s c in each of 6 bound-off sts, 22 s c to shoulder seam, 1 s c in each of 30 sts across back neck edge and 28 s c to left front band, ch 56 for left tie.
2nd row—Work 1 s c in 2nd st from hook and 1 s c in each st on chain, 1 s c in each st of row below on neck edge and 1 s c in each st of other chain.
3rd row—Ch 1, turn, work 1 s c in each st of row below.
Repeat 3rd row twice. Work 1 s c in each row on end; join. Fasten off.
Using 12-inch end of yarn, work 1 s c in each row on other end; join. Fasten off.
Steam, see page 51.
Sew 9 buttons in center of left front band opposite buttonholes.
Sew a button on each pocket lining, opposite buttonholes.
Sew seam binding over shoulder seams, holding in to 4¾ inches.
Buy or make shoulder pads No. 2, see page 47 and sew to armholes.

Cardigan No. 1539

(Shown on Front Cover)

Size 16

YARNS — Bear Brand or Bucilla Tweedmoor†, 5 skeins.

NEEDLES—1 pair Bucilla 14-inch White, Article 3846, Size 2.
1 pair Bucilla 14-inch Steel, Article 3499, Size 1.
Bucilla 6-inch White Crochet Hook, Article 3840, Size 2.

TRIMMINGS—9 Buttons ¾ inch diameter.

IMPORTANT—Check your gauge first, see page 51.

MEASUREMENTS FOR FINISHED GARMENT
Bust 35½ inches.
Width across back at underarm 17 inches.
Width across back at shoulders 12¾ inches.
Width across each front at underarm 9½ inches, including front border.
Length from lower edge to underarm 12½ inches.
Sleeves—Width below underarm 12¾ inches.
Length from lower edge to underarm 18 inches.

GAUGE (after blocking):

15 sts=2 inches 10 rows=1 inch

BACK—With white needles cast on 113 sts for lower edge.

First row (right side)—K 1, p 2, * k 3, p 2, k 1, p 2 *; repeat between *'s, ending k 3, p 2, k 1.

2nd row—P 1, k 2, * p 3, k 2, p 1, k 2 *; repeat between *'s, ending p 3, k 2, p 1.

Repeat these 2 rows 3 times.

9th row—Same as first row.

10th row—K all sts (this forms a ridge on right side).

These 10 rows form pattern, which is repeated for entire cardigan.

Continue pattern decreasing 1 st each side on next row. Repeat decreases every inch 3 times (105 sts). Work even until 4½ inches from lower edge. Change to steel needles and work even until there are 5 complete patterns from lower edge. Work 1 complete pattern with steel needles having *11 rows* instead of 9 rows between k ridges. Work until 6½ inches from lower edge. Change to white needles and increase 1 st each side on next row. Continue pattern as before (having 9 rows between each k ridge) and increasing 1 st each side every ½ inch 10 times (127 sts). Work even until 12½ inches from lower edge.

Armholes—Bind off 8 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 8 times (95 sts). Work even until 6½ inches above underarm, ending with 8th pattern row.

Shoulders—Bind off 5 sts at beginning of each of next 12 rows (30 sts for each shoulder). Change to steel needles.

Next row—K 1, * p 1, k 1; repeat from * across row.

Next row—P 1, * k 1, p 1; repeat from * across row.

Repeat these 2 rows until ribbing measures ¾ inch. Bind off, knitting the k and purling the p sts.

LEFT FRONT—With white needles cast on 68 sts for lower edge.

First row (right side)—K 1, p 2, * k 3, p 2, k 1, p 2 *; repeat between *'s 6 times, k 1, p 1 alternately to end of row (9 sts for front border).

2nd row—P 1, k 1 alternately for 9 sts, k 2, p 1, k 2, * p 3, k 2, p 1, k 2 *; repeat between *'s 5 times, p 3, k 2, p 1.

Continue pattern always working 9 sts of front border in ribbing, decreasing at underarm edge (beginning of rows worked from right side) as on back, until 6½ inches from lower edge, working with *white needles only* and always keeping 9 rows between all k ridges (64 sts). Increase 1 st at underarm edge on next row and repeat increase every ½ inch 10 times (75 sts). Work even until same length as back to underarm, ending at underarm edge with same pattern row as on back.

Armhole—Bind off 8 sts at beginning of next row for underarm. Shape armhole as on back (59 sts). Work even until 6 inches above underarm, ending at armhole edge with 4th row of 19th pattern.

Neck Shaping and Shoulder—Work to within 14 sts of end of row, slip these 14 sts to a safety pin to be held for neck ribbing. Turn, decrease 2 sts at neck edge *every* row twice, then 1 st *every* row until 7 inches above underarm. Shape shoulder as on back at beginning of rows worked from armhole edge, continuing to decrease at neck edge until 15 sts in all have been decreased, then work neck edge even.

Neck Band—Beginning on neck edge at shoulder, working from right side with steel needle, pick up and k 21 sts on neck edge, slip the 14 sts from safety pin to left needle, work ribbing of p 1, k 1, across these sts.

Next row—P 1, * k 1, p 1; repeat from * across row.

Continue in ribbing until same number of rows as on ribbing at back of neck. Bind off as to k and p.

RIGHT FRONT—With white needles cast on 68 sts for lower edge.

First row (right side)—K 1, p 1 alternately over first 9 sts (border), * p 2, k 1, p 2, k 3 *; repeat between *'s 6 times, p 2, k 1.

2nd row—P 1, k 2, * p 3, k 2, p 1, k 2 *; repeat between *'s 6 times, p 1, k 1 alternately over last 9 sts.

Repeat these 2 rows once. Work first buttonhole as follows: Work 5 sts in ribbing, turn, work 4 more rows on these 5 sts. Break yarn.

Join yarn at end of first short row, work to underarm edge, work 4 more rows on these sts. On next row work across all sts. These 6 rows complete one buttonhole. Shape to correspond to left front, repeating the 6 buttonhole rows and having 16 rows between each buttonhole until there are 8 buttonholes. Work 16 rows, ending at front edge with last row of 18th pattern. Make 9th buttonhole as follows: Work 5 sts in ribbing, turn; work 4 more rows on these 5 sts. Break yarn. Slip these 5 sts to a safety pin. Join yarn at end of first short row; work to armhole edge, turn. Work 3 more rows on these sts.

Next row—Work 9 sts and slip to a safety pin for neck ribbing. Continue on remaining 45 sts, shaping neck and shoulder to correspond to left front.

Neck Band—Slip sts from safety pins to steel needle. Join yarn at front edge and k 1, p 1 across these 14 sts completing top buttonhole, pick up and k 21 sts on neck edge to shoulder. Work same number of rows ribbing as on left front. Bind off.

SLEEVES—With steel needles cast on 52 sts for lower edge. Work ribbing of k 1, p 1, until 2½ inches from lower edge. Next row, continue ribbing increasing 1 st in 7th st, then 1 st in every 5th st 8 times, finish row (61 sts). Change to white needles.

First row (right side)—P 1, * k 3, p 2, k 1, p 2 *; repeat between *'s 6 times, k 3, p 1.

Work pattern increasing 1 st each side every inch 13 times; every ½ inch 4 times, carrying out pattern (95 sts). Work even until 18 inches from lower edge, ending with same pattern row as at underarm on back. Bind off 8 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 4 times; every 8th row 4 times; *every row* 12 times. Bind off remaining 39 sts. Make other sleeve in same way.

FINISHING—Sew seams. Sew sleeves to armholes, with sleeve seam at center underarm, holding in extra fullness at top of sleeve. Join yarn at lower edge of left front, working from wrong side, work a row of slip st up front edge to neck. Fasten off. Beginning at neck, work slip st on right front edge to correspond.

Steam, see page 51, blocking to correct measurements.

Sew buttons ⅛ inch from left front edge, opposite buttonholes.

Kashyr Sweater No. 1540

(*Continued from Page* 3)

Increase row (right side)—K 4, * increase 1 st in next st, k 7; repeat from *, ending last repeat k 4 (64 sts). Change to white needles. Work stockinette st (p 1 row, k 1 row), increasing 1 st each side every 8th row 18 times (100 sts).

Work even until 18 inches from lower edge.

Bind off 8 sts at beginning of each of next 2 rows for underarm.

Decrease 1 st each side every 2nd row 6 times.

Work even until 4½ inches above underarm.

Decrease 1 st each side of next row and repeat decreases every 2nd row twice more. Bind off 2 sts at beginning of each of next 6 rows, then 3 sts at beginning of each of next 4 rows.

Bind off remaining 42 sts.

Make other sleeve in same way.

FINISHING—Run a cotton basting thread across back below first row worked with white needles (2½ inches above lower edge). Run 5 more bastings above first basting, with 4 rows between each basting.

Run 6 bastings across each front in corresponding rows. Run a basting across pocket opening in first row below bound-off row.

Run 3 more bastings below first basting across the 12 "k ribs" below pocket edge, with 4 rows between each basting.

Run 4 bastings across other pocket in same way.

Sew seams, matching bastings at underarm. Sew sleeves to armholes, with sleeve seam at center underarm, holding in extra fullness at top of sleeve to 4 inches.

Neck Band—Join yarn on neck edge at corner of right front edge.

Working from right side, work 1 s c in each of 11 bound-off sts, 26 s c to shoulder, 1 s c in each st on back neck edge, 37 s c to left front corner.

2nd row—Ch 1, turn, work 1 s c in each st of row below.

3rd row—Same as 2nd row. Fasten off.

Join yarn on right front at lower edge. Working from right side, work 2 s c in every 3 rows up to first basting, 3 s c in every 4 rows up to neck (holding front edge in to 16 inches), 1 s c in each row of s c on neck band, 3 s c at corner, 1 s c in each st of neck band, 3 s c at corner, work s c on left front edge to correspond. Fasten off at lower edge.

Steam, see page 51.

WAISTLINE SMOCKING—Join Kashyr on right front crocheted edge at first basting (2½ inches above lower edge). Working from right side insert embroidery needle under s c and first k rib at first basting (passing needle over 3 p sts between s c and rib). Draw these 2 sts together tightly and embroider over them once more bringing needle through to right side in 2nd row of basting at left of 2nd k rib.

Embroider over and over first and 2nd k rib of this row in same way as before, bringing needle through to right side at left of 3rd k rib of first row of basting. Being careful not to draw yarn too tightly on wrong side, continue smocking each successive k rib across these 2 "basting" rows to left front edge, ending by embroidering over last k rib and s c of left front edge. Repeat this double row of smocking twice more (along lines of 3rd and 4th basting and 5th and 6th basting).

Work 2 double rows of smocking across each pocket opening in same way, working over 12 k ribs below top edge of openings.

Sew edges of each pocket lining to wrong side of front, sewing side edges along the k rib at each end of opening and 35 sts of lower edge of lining to 45 sts of front.

Sew slide fastener to front edges from lower edge up to first row of neck band, matching smocking at waistline.

Buy or make shoulder pads No. 6, see page 47 and sew to armholes.

Flare Rib Frock No. 1536

(*Continued from Page* 4)

8th row—K 5, p 4, k 4, p 63.

Repeat 7th and 8th row twice.

13th row—K 55, p 4, k 4, p 4, k 4, p 5.

14th row—K 5, p 4, k 4, p 4, k 4, p 55.

Repeat 13th and 14th row twice.

19th row—K 47, * p 4, k 4; repeat from * twice, p 5.

20th row—K 5, * p 4, k 4; repeat from * twice, p 47.

Repeat 19th and 20th row once.

Front should now measure same length as back to underarm.

Armhole—Bind off 9 sts at beginning of next row for underarm, work across row, working pattern on 29 sts as in 19th row.

Work 1 row even, working pattern on 29 sts.

25th row of yoke—K 2 tog, k 28, * p 4, k 4; repeat from * 3 times, p 5.

26th row—K 5; * p 4, k 4; repeat from * 3 times, p 29.

Continue as in last 2 rows, decreasing 1 st at armhole edge every 2nd row twice more and working 37 sts in pattern.

Work 1 row even.

31st row—K 2 tog, k 17, * p 4, k 4; repeat from * 4 times, p 5.

32nd row—K 5, * p 4, k 4; repeat from * 4 times, p 18.

Continue as in last 2 rows, decreasing 1 st at armhole edge every 2nd row 7 times more and working 45 sts in pattern (56 sts).

Keep armhole edge even, continuing to work 45 sts in pattern and remaining 11 sts in stockinette st until 6¾ inches above underarm, ending at armhole edge.

Shoulder—Continue working as before, binding off 3 sts from armhole edge once, then 5 sts every 2nd row 6 times. Break yarn.

Slip remaining 23 sts on holder for collar.

RIGHT FRONT—Cast on 64 sts for lower edge. P 1 row.

Increase row (right side)—K 9, * increase 1 st in next st, k 14, repeat from *, ending last repeat k 9 (68 sts). Work stockinette st, increasing 1 st at underarm edge (*end* of k rows) every ¾ inch twice. P 1 row, ending at front edge.

Next (buttonhole) row—K 2, bind off the next 3 sts for buttonhole, work to end of row.

On the following row cast on 3 sts over the bound-off sts.

Continue to work to correspond to left front, repeating the 2 buttonhole rows every 1¾ inches (having 16 rows between buttonholes) until same length as left front up to yoke, ending with a p row.

Yoke—First row (right side)—P 5, k 71.

2nd row—P 71, k 5.

Complete to correspond to left front, repeating buttonholes as before (having 16 rows between all buttonholes) until there are 6 buttonholes in all on right front.

SLEEVES—**Cuff**—Cast on 48 sts for lower edge.

First row (wrong side)—K 2, * p 4, k 4, repeat from *, ending last repeat k 2.

2nd row—P 2, * k 4, p 4, repeat from *, ending last repeat p 2.

Repeat these 2 rows until cuff measures 3¼ inches, ending on wrong side.

Next row—Increase 1 st in first st, k 5, work ribbing to within 6 sts of end, k 5, increase 1 st in last st (50 sts).

Work 5 rows even, working center 36 sts in ribbing and 7 sts at each side in stockinette st.

Next row—Increase 1 st in first st, k 14, work ribbing across next 20 sts, k 14, increase 1 st in last st (52 sts).

Work 5 rows even, working center 20 sts in ribbing and 16 sts at each side in stockinette st.

Next row—Increase 1 st in first st, k 23, p 4, k 23, increase 1 st in last st (54 sts).

Work 5 rows even, working a rib on center 4 sts and 25 sts each side in stockinette st. This completes ribbed cuff.

Continue stockinette st on all sts, increasing 1 st each side of next row and repeating increases every 6th row 10 times, then every 8th row 9 times (94 sts).

Work even until 18 inches from lower edge of cuff.

Bind off 7 sts at beginning of each of next 2 rows for underarm.

Decrease 1 st each side every 2nd row 10 times; every 6th row 4 times; every 2nd row 3 times.

Bind off 2 sts at beginning of each of next 6 rows, then 3 sts at beginning of each of next 4 rows. Bind off remaining 22 sts.

Make other sleeve in same way.

FINISHING—Sew seams. Sew sleeves to armholes with sleeve seam at center underarm, holding in extra fullness of sleeve at top of armhole.

COLLAR—Slip 23 sts of left front, 32 sts of back and 23 sts of right front to needle (78 sts).

Join yarn at right front edge.

First row—P 5, * k 4, p 4, repeat from *, ending last repeat p 5.

2nd row—K 5, * p 4, k 4, repeat from *, ending last repeat k 5.

Repeat these 2 rows until collar measures 1 inch. Bind off, knitting the k and purling the p sts.

Join yarn on left front at lower edge. Working from wrong side, work 2 s c in every 3 rows on front edge to neck edge, 3 s c at corner, 1 s c in each bound-off st of collar, 3 s c at corner, 2 s c in every 3 rows to lower edge of right front.

2nd row—Ch 1, turn, work 1 s c in each st of row below, working 3 s c at corners. Fasten off.

Work buttonholes in buttonhole st.

Steam, see page 51.

Sew waist to skirt, with 6 sts at right front edge overlapping 6 sts at left front edge and sewing a rib of 4 p sts of skirt to first 4 sts of overlap of right front.

Sew seam binding over shoulder seams and across back of neck, holding each shoulder in to 4½ inches and back of neck in to 6 inches.

CASING FOR ELASTIC — Work as for one piece dress, see page 51.

Steam waistline seam. Insert elastic in casing.

Sew 6 buttons ½ inch from left front edge opposite buttonholes.

Buy or make shoulder pads No. 7, see page 47 and sew to armholes.

Cloister Slipon No. 1542

(Continued from Page 6)

Repeat last 6 rows for pattern of yoke. Work even until 7 inches above underarm.

Shoulder—Keeping center edge even bind off 6 sts from armhole edge every 2nd row twice, then 5 sts every 2nd row 4 times (32 sts for shoulder).

Bind off remaining 21 sts.

Slip sts of left side to white needles. Join yarn at center edge.

Left Side of Yoke—**First row** (right side)—P 2, k 1, repeat between *'s of first row of right side of yoke 11 times, p 3.

2nd row—K 3, repeat between *'s of 2nd row of right side of yoke 11 times, p 1, k 2.

Complete to correspond to right side of yoke, having 3 sts less on left side and binding off 18 instead of 21 sts after shaping shoulder.

FRONT—With steel needles cast on 116 sts for lower edge.

Work ribbing as on back until there is the same number of rows in ribbing as on back up to increase row.

Increase row—Work ribbing, increasing 1 st in 8th st, then in every 4th st 25 times, work to end (142 sts). This completes ribbing.

Change to white needles and work stockinette st increasing 1 st each side every 2 inches 3 times (148 sts). Work even until same length as back to underarm.

Armholes—Bind off 9 sts at beginning of each of next 2 rows for underarm.

Decrease 1 st each side every 2nd row 9 times (112 sts). Work even until same length as back up to beginning of yoke, ending with a p row.

Yoke—**First row** (right side)—* P 3, k 1 *; repeat between *'s 12 times, p 1, p 2 tog, p 1, k 1, repeat between *'s 13 times, p 3 (111 sts).

2nd row—K 3, * p 1, k 3 *; repeat between *'s to end.

3rd row—P 3, * k 1, p 3 *; repeat between *'s to end.

4th row—P all sts. **5th row**—K all sts.

6th row—Same as 4th row. **7th row**—Same as 3rd row.

Repeat last 6 rows for pattern of yoke. Work even until 6 inches above underarm, ending with 6th row (a p row).

Neck and Shoulder Shaping—**Next row**—Work pattern over 45 sts and slip sts to a strand of yarn, bind off the next 21 sts for front of neck, work pattern to end.

Continue pattern on sts of right side, decreasing 1 st at neck edge *every row* until 7 inches above underarm. Shape shoulder as on back, continuing to decrease at neck edge as before until 13 sts in all have been decreased, then keep neck edge even. Slip sts from strand of yarn to white needles. Join yarn at neck edge and work left side to correspond to right side.

SLEEVES—With steel needles cast on 52 sts for lower edge of cuff.

Work ribbing as on back until 2½ inches from lower edge.

Increase row—Work ribbing, increasing in first st, then in every 4th st 12 times, then in last st (66 sts). This completes ribbing for cuff.

Change to white needles and work stockinette st, increasing 1 st each side every inch 13 times, every ½ inch 4 times (100 sts).

Work even until 18 inches from lower edge of cuff.

Bind off 9 sts at beginning of each of next 2 rows.

Decrease 1 st each side every 2nd row 5 times; every

4th row 5 times; every 2nd row 12 times; every row 3 times.
Bind off remaining 32 sts.
Make other sleeve in same way.

NECK BAND—Sew shoulder seams. With steel needle and beginning at left edge of back opening, pick up and k 18 sts on back neck edge to shoulder seam, 25 sts on shaped neck edge of left side of front, 22 sts across center front, 25 sts on right neck edge to shoulder seam and 21 sts on back neck edge to right edge of opening (111 sts).
First row—P 3, * k 2, p 2; repeat from * to end.
2nd row—* K 2, p 2; repeat from *, ending row k 3.
Repeat last 2 rows 4 times more (10 rows ribbing).
Bind off as to k and p.

FINISHING—Sew seams. Sew sleeves to armholes with sleeve seam at center underarm and extra fullness of sleeve held in across top of armhole. Join yarn at top of neck band on right side of back opening.
Work 1 s c in end of every 2nd row to lower edge of underlap. Fasten off.
Join yarn at lower edge on left side of opening and work 1 s c in every 2nd row to top of neck band. Fasten off. Join yarn in first s c on left side of opening, work 1 s c in each of 5 s c, * ch 4, join to 3rd s c from hook, 1 slip st in each of the 4 ch (buttonloop), 1 s c in each of next 6 s c; repeat from * 4 times, make another buttonloop, 1 s c in each s c to end, make 7th buttonloop. Fasten off.
Tack lower edge of underlap to wrong side of back.
Steam, see page 51.
Sew buttons to underlap opposite buttonloops.
Buy or make shoulder pads No. 1, see page 47 and sew to armholes.

Classic Dress No. 1538

(Continued from Page 9)

Armhole and Neck Shaping—Bind off 8 sts at beginning of next row for underarm. Keeping front edge even, decrease 1 st at armhole edge every 2nd row 7 times, ending at front edge (52 sts).

Pocket Border—First row—Work 21 sts, p 1, * k 1, p 1, repeat from * 9 times more (21 sts in pocket border), k to end.
2nd row—P 2 tog, p 9, * k 1, p 1, repeat from * 9 times more, work to end of row.
3rd row—Same as first row.
4th row—P 2 tog, p 8, * k 1, p 1, repeat from * 9 times more, work to end of row.
5th row—Work 21 sts, p 1, * k 1, p 1, repeat from * 3 times more, bind off next 3 sts for buttonhole, continue across row, working seed st on pocket as before.
6th row—P 2 tog, p 7, work seed st on 8 sts, cast on 3 sts, work to end of row (49 sts).
Work 4 rows even, continuing pocket border and ending at front edge.
11th row—Work 21 sts, bind off next 21 sts for pocket opening, work to end of row.
This completes pocket border.
12th row—P 7, with right side of lining to wrong side of front, slip sts of one pocket lining to left hand end of needle, p across these 21 sts, work to end of row.
Work even until 5 inches above underarm, ending at front edge.
Bind off 10 sts at beginning of next row for neck edge.
Decrease 1 st at neck edge every 2nd row, keeping armhole edge even until 6¾ inches above underarm.

Shoulder—Bind off 4 sts at armhole edge every 2nd row 7 times, continuing to decrease at neck edge as before until there are 11 decreases in all, then keep neck edge even. Fasten off.

LEFT FRONT—Cast on 54 sts for lower edge. P 1 row.
Increase row—K 10, * increase 1 st in next st, k 10, repeat from * to end of row (58 sts).
Left Front is worked in stockinette st, omitting seed st border at front edge. Work to correspond to right front up to armhole, increasing and decreasing for underarm at *beginning of k rows* and omitting buttonholes.

Armhole—Bind off 8 sts for underarm. Decrease 1 st at armhole edge every 2nd row 6 times (53 sts).
Work across next row to armhole edge.

Pocket Border—First row—K 2 tog, k 9, p 1, * k 1, p 1, repeat from * 9 times more, k 21.
Finish to correspond to right front.

SLEEVES—Cast on 71 sts for lower edge. Work stockinette st, increasing 1 st each side every 8th row 5 times (81 sts).
Work even until 5 inches from lower edge, ending with a k row.
Bind off 6 sts at beginning of each of next 2 rows for underarm.
Decrease 1 st each side every 2nd row 6 times, every 6th row 5 times (47 sts). P 1 row.

Darts for Shaping Top—First row—K 2 tog, k 6, * k 2 tog, k 1 (seam st), slip, k and pass *, k 21, repeat between *'s once, k 6, k 2 tog (41 sts).
2nd and all even numbered rows—Purl.
3rd row—K 6, repeat between *'s of first row once, k 19, repeat between *'s again, k 6 (37 sts).
5th row—K 2 tog, k 3, repeat between *'s of first row once, k 17, repeat between *'s again, k 3, k 2 tog (31 sts).
7th row—K 3, repeat between *'s once, k 15, repeat between *'s again, k 3 (27 sts).
9th row—K 2 tog, repeat between *'s once, k 13, repeat between *'s again, k 2 tog (21 sts).
11th row—Repeat between *'s once, k 11, repeat between *'s again.
Bind off remaining 17 sts.
Make other sleeve in same way.

COLLAR—With Tweedmoor, cast on 103 sts loosely for outer edge.
First row—P, casting on 2 sts at end of row.
2nd row—K, casting on 2 sts at end of row.
Repeat these 2 rows once (111 sts).
Increase 1 st each side every 2nd row 3 times (117 sts).
Work 4 rows even.
Decrease row—P 8, * p 2 tog, p 2, repeat from *, ending last repeat p 7 (91 sts).
Work even until collar measures 2½ inches from cast-on row, ending with a p row. Bind off for neck edge.
Do not break yarn.
Working from right side, work 8 s c on even edge, 12 s c on shaped edge to outer edge; 1 s c in each cast-on st of outer edge, 12 s c on shaped edge and 8 s c on even edge at other side. Fasten off.

FINISHING—Sew seams. Sew sleeves to armholes with sleeve seam at center underarm and shoulder seam at center of space between darts of sleeve.
Join Tweedmoor on left front at corner of neck edge. Working from right side, work 2 s c in every 3 rows on front edge to lower edge.
Ch 1, turn, work 1 s c in each st of row below. Fasten off.
With Tweedmoor work buttonholes in buttonhole st.
Sew edges of pocket linings to wrong side of fronts.

Join Shetland Floss on lower edge of sleeve at seam. Working from right side, work 1 s c in each st on lower edge; join. Ch 1, turn, work 1 s c in each st of row below; join. Fasten off. Work s c on other sleeve in same way.

Join Shetland Floss in first s c on edge of collar. Working from right side, work 1 s c in each st of row below. Ch 1, turn, repeat last row once. Fasten off.

With right side of collar to wrong side of waist, right end of collar 3 sts from front edge of seed st border and left end 3 sts from first row of s c on left front edge, sew neck edges together.

Steam, see page 51.

Sew waist to skirt, with seed st band on right front overlapping 7 sts of left front. Sew bound-off end of seed st band for skirt to lower edge of seed st border on waist. Sew right edge of band to skirt along a line of stitches from waistline to lower edge and sew cast-on end of band to cast-on row of skirt.

Casing for Elastic—Work as for one piece dress, see page 51.

Steam waistline seam and skirt band.

Insert elastic in casing.

Sew 6 buttons ¾ inch from left front edge of waist opposite buttonholes. Sew a button on each pocket lining under buttonhole of pocket border. Sew snap fastener at neck edge under collar.

Sew 12 buttons at center of skirt band (tacking through skirt), with top button 2½ inches below waistline and other buttons spaced an equal distance apart (lower button should be about 2 inches above lower end of band).

Sew seam binding over shoulder seams, holding each shoulder in to 4½ inches.

Buy or make shoulder pads No. 8, see page 47 and sew to armholes.

Speedway Sweater No. 1545

(Continued from Page 10)

2 sts for buttonhole, 1 s c in each of next 7 sts, repeat from * 5 times, ending last repeat 1 s c in each of last 2 sts (6 buttonholes in all).

3rd row—Ch 1, turn, work 1 s c in each st of row below, 2 s c at corner, 1 s c in each of 2 rows s c, 1 s c in each of 3 bound-off sts, 9 s c to shoulder seam, 13 s c across back neck edge, 14 s c to left front corner, 2 s c at corner and 1 s c in each st of row below to lower edge, 2 s c at corner, 1 s c in each of 2 rows s c on lower edge; join. Fasten off.

Working with end of yarn, work 3 s c on lower edge of right buttonhole band; join. Fasten off.

Steam, see page 51.

Sew 6 buttons on first s c row on left front edge, opposite buttonholes. Buy or make shoulder pads No. 6, see page 47 and sew to armholes.

Waffle-Knit Cardigan No. 1533

(Continued from Page 13)

Shoulder—Bind off 6 sts at beginning of next row. Bind off 3 sts at armhole edge every 2nd row 11 times, continuing to decrease at neck edge as before until there are 25 decreases in all, then work neck edge even. Fasten off.

LEFT FRONT—Work to correspond to right front, ending at underarm with 18th pattern row and at shoulder with 14th pattern row.

SLEEVES—With steel needles, cast on 88 sts for lower edge. K 1 row. Work pattern for 18 rows. Change to white needles.

Increase 1 st each side of next row and repeat increases every 6th row 11 times more (112 sts).

Work even until 5 inches above lower edge, ending with 18th pattern row.

Bind off 9 sts at beginning of each of next 2 rows for underarm.

Decrease 1 st each side every 2nd row 6 times (82 sts). Work even until 4¾ inches above underarm, ending on wrong side with 14th pattern row.

Decrease 1 st each side of next row and repeat decreases every 2nd row 7 times more.

Bind off 2 sts at beginning of each of next 6 rows, then 3 sts at beginning of each of next 4 rows, ending with 3rd pattern row.

Bind off remaining 42 sts.

Work other sleeve in same way.

FRONT BORDERS—Join yarn on right front edge in 4th row from lower edge. With white needle, pick up and k 3 sts in next 6 rows on front edge, 2 sts in next 3 rows of ridge, 2 sts in next 6 rows between ridges and 2 sts in next 3 rows of ridge, continue in this way up to shoulder edge (picking up 9 sts in every 18 rows). K 1 row, p 1 row, k 1 row, p 1 row. Bind off.

Work border on left front edge to correspond, leaving last 4 rows at lower edge free.

FINISHING—Sew seams with ridges of pattern matching and sew edge of neck and front borders together at shoulder seams. Sew sleeves to armholes, with sleeve seam at center underarm and center pattern at shoulder seam, holding in extra fullness at top.

Sew lower edge of front borders to edge of first 4 rows of fronts.

Allow border on front edges and back of neck to roll over naturally and tack to first row of border on wrong side.

Steam lightly, see page 51, being careful not to flatten ridges.

With lower end of slide fastener ¼ inch above lower edge of jacket, sew fastener to front edges along line of tacking so that rolled edge entirely covers fastener when closed.

Buy or make shoulder pads No. 6, see page 47 and sew to armholes.

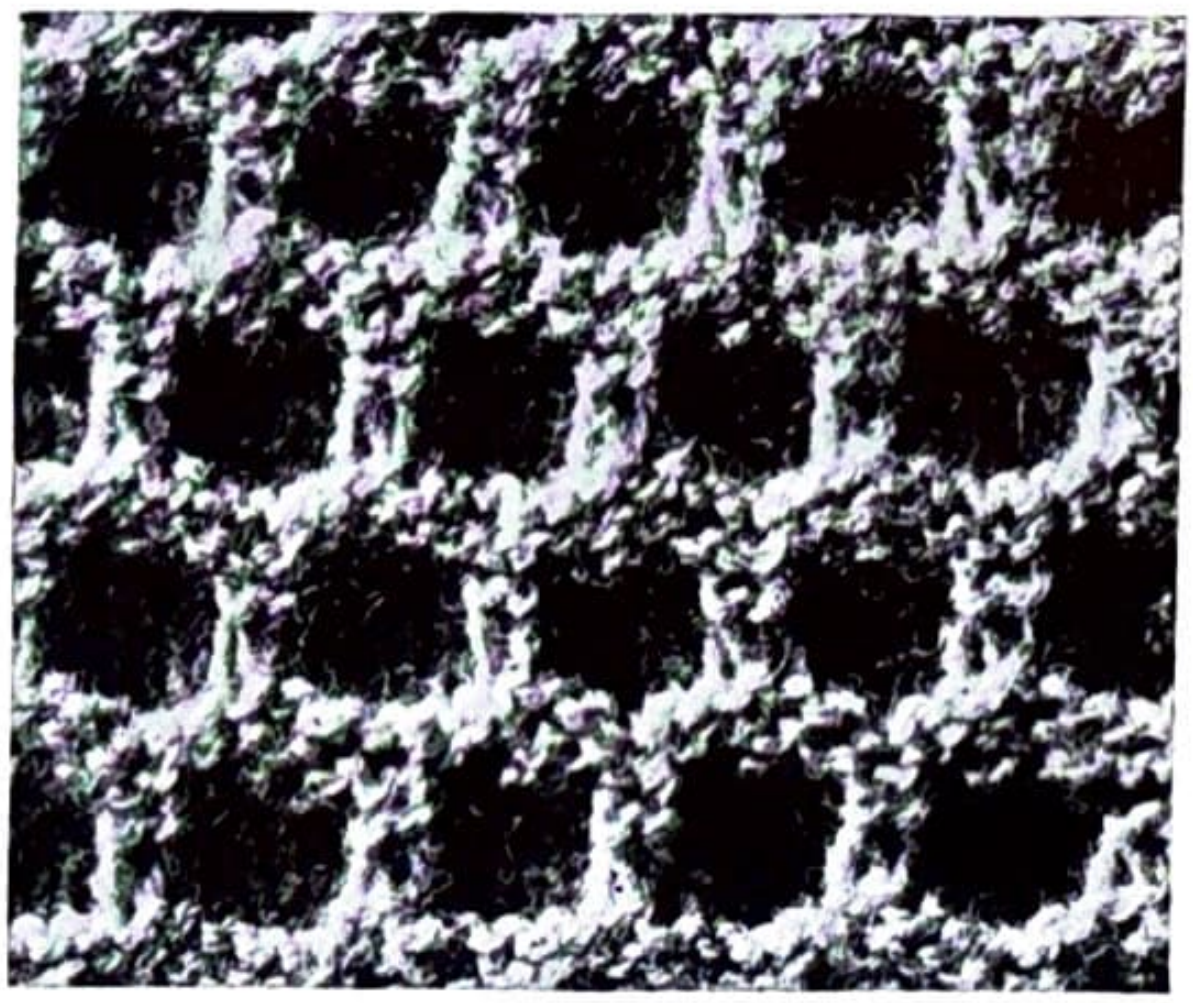

Hooded Domino No. 1543

(Continued from Page 15)

edge and work to correspond to right front, shaping for armhole edge at beginning of rows worked from right side and binding off for neck edge at beginning of a row worked from wrong side.

Back Armholes—Take up 67 sts of back. Join yarn at right armhole edge. Decrease 1 st each side every 2nd row 4 times (59 sts).
Work even until same number of rows as on right front up to shoulder.

Shoulders—Bind off 3 sts at beginning of each of next 2 rows, then 4 sts at beginning of each of next 8 rows (19 sts for each shoulder). Bind off remaining 21 sts for back of neck.

SLEEVES—Cast on 41 sts for lower edge.
Work ribbing as on tabs, increasing 1 st each side every 4th row 7 times (55 sts).
Work even until 4¾ inches from lower edge. Bind off 4 sts at beginning of each of next 2 rows for underarm.
Decrease 1 st each side every 2nd row 3 times (41 sts).
Work even until 5¾ inches above underarm, ending on wrong side.
Decrease row—K 2 tog 7 times, work 13 sts, k 2 tog 7 times (27 sts).
Next row—Bind off 7 sts, work until 13 sts on needle, bind off remaining 7 sts. Break yarn and join in last st worked.

Sleeve Insert—Work even on remaining 13 sts for 1½ inches. Bind off.
Work other sleeve and insert in same way.

FINISHING—Sew sleeve and shoulder seams. Sew 7 bound-off sts at each side of top of sleeve to edges of insert. Sew sleeves to armholes, with sleeve seam at center underarm and center of insert at shoulder seam.
Join yarn on right front at lower corner of tab. Working from right side, work 1 slip st in every 2nd row to neck edge. Fasten off.
Join yarn on left front at neck edge. Work slip st on left front edge to correspond.
Join yarn on right front at lower corner of tab. Working from right side, work 1 slip st in each st of row below to neck edge, 2 s c at corner, 1 s c in each of 5 bound-off sts, 16 s c to shoulder seam, 1 s c in each st on back neck edge, 21 s c to left front edge, 2 s c at corner and 1 slip st in each st of row below on left front edge. Fasten off at lower corner of tab.
Thread Lastex in tapestry needle. Join on wrong side at left front edge in 2nd row above joining of tabs. Run Lastex around waistline of entire jacket under loop of sts on wrong side, being careful it does not show on right side, draw up to desired size for waistline and fasten off at edge of right front. Run thread of Lastex above first thread in every 4th row twice.
Sew slide fastener to front edges from neck to joining row of tabs (2½ inches above lower edge of tabs); so that crocheted front edges entirely cover fastener and meet when closed, sewing ends of Lastex firmly under fastener tape.
Buy or make shoulder pads No. 3, see page 47 and sew to armholes.

HOOD

GAUGE:

Straight Needles — 15 sts=4 inches 6 rows=1 inch
Circular Needle — 9 sts=2 inches 7 rows=1 inch

TABS—With circular needle, cast on 13 sts for lower edge of tab. Work same as jacket tab for 2¼ inches, ending on wrong side. Break yarn and slip on holder.
Make 4 more tabs in same way.
With all 5 tabs on needle (right side toward you), work across row as follows: Work 12 sts of 5th tab, * p 2 tog (last st of 5th tab and first st of next tab), work 11 sts, repeat from *, ending last repeat work 12 sts (61 sts).
Work ribbing even until 3½ inches from lower edge of tabs.
Change to straight needles.
Work even until 15 inches from lower edge of tabs, ending on wrong side at right front edge.
Next row—Work 24 sts of right side of hood and slip on holder; bind off next 13 sts for center edge, work across remaining sts of left side.
Keeping front edge even, bind off 6 sts at center edge every 2nd row 4 times. Fasten off.
Take up 24 sts of right side. Join yarn at center edge and work to correspond to left side, binding off at center edge.

FINISHING—Fold hood at center and sew bound-off sts together at top.

Buttonloop—Join yarn on right front edge 2 inches above lower edge. Ch 3 and join ½ inch above. Fasten off.
Sew button ¼ inch from left front edge, opposite buttonloop.

Duotone Cardigan No. 1535

(Continued from Page 17)

2nd row—Slip st over 3 sts, 1 s c in next st, work h d c to within 4 sts of end, 1 s c in next st. Repeat 2nd row 6 times more (leaving off 3 sts each side each time). There will be 26 sts for each shoulder and 26 h d c for back of neck. Fasten off.

POCKET FLAPS—With white hook, ch 4 for lower edge of point, work 1 h d c in 3rd st from hook, 1 h d c in next st of chain.
2nd row (right side)—Ch 2, turn, work 2 h d c in each of 2 sts of row below.
3rd row—Ch 2, turn, work 2 h d c in first st, 1 h d c in each of next 2 sts, 2 h d c in last st (6 sts). Continue in this way to increase 1 st each side every row 6 times more, ending on wrong side (18 sts). Break yarn.
Make 3 more flaps in same way.

RIGHT FRONT YOKE—Pin pocket flap over 8 center main color ribs at top of right front, with wrong side of flap to right side of front.
First row—Join yarn on top edge of right front at front corner.
* Working from right side with steel hook, ch 1, work 2 s c in top of each of first 4 main color ribs; with white hook work h d c across 18 sts of flap, leaving the 8 main color ribs free under flap *; with steel hook work 2 s c in top of each of last 4 main color ribs (34 sts).
2nd row—With white hook, ch 2, turn, work h d c in each st of row below. Repeat 2nd row 8 times more (about 2 inches above beginning of yoke), ending at neck edge.
Next row—Ch 2, turn, wrap, draw up a loop in first st, wrap, draw up a loop in next st, wrap, take off all 5 loops (a decreasing h d c), work across row. Repeat decrease at neck edge in this way every 2nd row 3 times more, keeping armhole edge even (30 sts).

Shoulder—**First row**—Slip st over 3 sts, 1 s c in next st, work 1 h d c in each st to end of row.
2nd row—Ch 2, turn, work a decreasing h d c, work

1 h d c in each st to within 4 sts of end of row, 1 s c in next st (this leaves off 3 sts at armhole edge). Repeat these 2 rows twice more. Repeat first row again.
8th row—Ch 2, turn, work a decreasing h d c, 1 s c in next st (26 sts for shoulder). Fasten off.

Work **LEFT FRONT YOKE** to correspond to right front yoke up to shoulder, decreasing for neck edge at end instead of beginning of rows and ending at neck edge.
Shoulder—First row—Ch 2, turn, work 1 h d c in each st to within 4 sts of end of row, 1 s c in next st.
2nd row—Slip st over 3 sts, 1 s c in next st, work h d c across row, decreasing 1 st at end of row.
Finish to correspond to right shoulder.

WAISTBAND—First row—With steel hook join yarn on lower edge of left front at corner. Working from right side, repeat between *'s of first row of right front yoke, working across first pocket flap; with steel hook draw up 2 loops in first main color rib and work off as 1 s c (a decreasing s c), work a decreasing s c in next main color rib; * work 2 s c in next main color rib, work a decreasing s c in each of next 2 main color ribs, repeat from * 22 times more, work h d c across other pocket flap as before, work 2 s c in each of last 4 main color ribs with steel hook (146 sts). Change to white hook.
2nd row—Ch 2, turn, work 1 h d c in each st of row below. Repeat 2nd row until border measures 3¼ inches, ending on right side at right front edge. Do not break yarn.

RIGHT FRONT BORDER—First row—Working from right side with white hook, ch 2, work 20 h d c on front edge of waistband, 66 h d c on front edge up to yoke (3 h d c in every 4 sts) and 12 h d c on edge of yoke to neck edge (98 sts). Work h d c even for 6 rows more, ending at neck edge.
8th row—Ch 2, turn, 1 h d c in each of first 2 sts, * ch 1, skip 1 st for buttonhole, 1 h d c in each of next 8 sts, repeat from * 10 times more, ending last repeat 1 h d c in each of last 5 sts (11 buttonholes in all). Work h d c for 2 rows more. Fasten off. Work 10 rows h d c on left front edge to correspond, omitting buttonholes.
Sew shoulder seams of yoke.
Join yarn on neck edge of right front at corner of border, working from right side with white hook, ch 1, work 11 s c on top edge of border, 19 s c to shoulder seam, 1 s c in each of 26 sts on back neck edge. 30 s c to corner of left front border, join. Fasten off. Join yarn on lower edge of left front at corner of front border.
Working from right side, with white hook, work 10 s c on lower edge of border, join. Fasten off.
Work s c on lower edge of right front border to correspond.
Join yarn on lower edge of right front yoke at armhole edge of pocket flap. Working from right side with white hook, work 9 s c on edge of flap, 3 s c at corner, 9 s c on other edge. Break yarn, leaving a 10 inch end. Sew 8 main color ribs on top edge of front to wrong side of flap, sewing along first row of yoke. Crochet and sew other 3 flaps in same way.

FINISHING—Sew sleeve seams. Sew sleeves to armholes, with sleeve seam at center underarm, matching underarm ribs, having center rib at top of sleeve at shoulder seam and holding in extra fullness of ribs at top to 4½ inches.

CUFFS—First row—Join yarn on lower edge of sleeve at seam. Working from right side with steel hook, ch 1, * work 2 s c in first main color rib, work a decreasing s c in next rib, repeat from * around, join (54 sts). Change to white hook.
2nd row—Ch 2, turn, work 1 h d c in each st of row below, join.
Repeat 2nd row 4 times more. Fasten off.
Work other cuff in same way.
Sew 11 buttons on left front border ½ inch from edge, opposite buttonholes. Sew a button at center of each pocket flap, ¾ inch above point, tacking flaps to fronts, Buy or make shoulder pads No. 7, see page 47 and sew to armholes.

Bead-Studded Cardigan No. 1531

(Continued from Page 19)

Work to correspond to left front, shaping underarm at end of k rows.

SLEEVES—With size 2 needles and beaded yarn cast on 84 sts for lower edge. K 1 row.
2nd row—P 5, * slip down a bead, k 1, p 2 *; repeat between *'s once, repeat between †'s of 2nd row of back 4 times, slip down a bead, k 1, p 4.
Work in pattern, increasing 1 st each side every ½ inch 8 times, carrying out pattern when there are sufficient sts (100 sts). Work even until 4½ inches from lower edge. Bind off 9 sts at beginning of each of next 2 rows. Decrease 1 st each side every 2nd row 3 times; every 8th row 8 times. Decrease 1 st each side of next row. Bind off remaining 58 sts. Make other sleeve in same way.

FINISHING — Sew seams. Run a gathering thread across top of sleeves. Sew sleeves to armholes, with seams matching, gathering extra fullness at top of armholes. Join yarn (without beads) at lower left front edge, work s c across lower edge, decreasing if necessary to keep edge flat, 3 s c in lower corner of right front edge, 1 s c in end of every 2nd row to neck edge, 3 s c in corner, work s c around neck edge, keeping work flat, 3 s c in corner, 1 s c in end of every 2nd row to lower left front edge; 3 s c in corner; work 1 s c in each st on lower edge to right front. Fasten off. Work a row of s c around lower edge of sleeves, working from right side.
Steam, see page 51.
Buy or make shoulder pads No. 1, see page 47 and sew to armholes.
Sew slide fastener to wrong side of fronts at inside of crochet edge, so that crochet edges cover slide fastener.

Waistcoat Blouse No. 1541

(Continued from Page 20)

Change to size 2 needles and finish to correspond to left front, repeating buttonhole every 1¾ inches until there are 6 buttonholes in all (about 1 row even above last buttonhole before neck shaping).

SLEEVES—With size 1 needles, cast on 75 sts for lower edge.
First row (right side)—P 3, * k 3, p 3; repeat from * across row.
2nd row—K 3, * p 3, k 3; repeat from * across row.
Repeat last 2 rows for 1 inch. Change to size 2 needles.
Increase 1 st each side every 6th row 6 times (87 sts).
Work even until 5 inches from lower edge.
Bind off 7 sts at beginning of each of next 2 rows.
Decrease 1 st each side every 2nd row 5 times (63 sts).
Work even until 5 inches above underarm.

Decrease 1 st each side of next row and repeat decreases every 2nd row twice, then bind off 3 sts at beginning of each of next 6 rows.
Bind off remaining 39 sts.
Make other sleeve in same way.

FINISHING—Sew seams. Sew sleeves to armholes, with sleeve seam at center underarm and center rib at shoulder seam, holding in extra fullness at top. Join main color on lower edge of sleeve at seam.
Working from right side, work 1 s c in each st on lower edge; join.
Break main color; join contrasting color.
2nd row—Ch 1, turn, work 1 s c in each st of row below; join.
Repeat 2nd row once. Fasten off.
Work other sleeve in same way.
Join main color on lower edge of right front at underarm seam.
Working from right side, work 38 s c on lower edge to point, 3 s c at point, 31 s c to end of shaped edge (about 5 s c in every 6 rows), 2 s c at corner, 65 s c to beginning of neck shaping (about 3 s c in every 5 rows), 2 s c at corner, 60 s c to shoulder seam (about 2 s c in every 3 rows), 29 s c across back neck edge, work edges of left front to correspond, 1 s c in each st on lower edge of back to right underarm seam; join. Break main color; join contrasting color.
2nd row—Ch 1, turn, work 1 s c in each st of row below, working 3 s c at points and 2 s c at corners, join.
Repeat 2nd row once. Fasten off.
Steam, see page 51.
Sew 6 buttons ¾ inch from left front edge, opposite buttonholes.
Sew snap fasteners at corners of right front edge and at corresponding point on left front. Sew seam binding over shoulder seams, holding seams in to 4½ inches.
Work buttonholes in buttonhole st.
Buy or make shoulder pads No. 6, see page 47 and sew to armholes.

French Doll Bolero No. 1544

(Continued from Page 23)

SLEEVES—Cast on 80 sts for lower edge. Work pattern same as back until 4 inches from lower edge, ending with 4th pattern row.
First decrease row—K 4, * k 2 tog, k 5; repeat from *, ending last repeat k 4 (69 sts).
Work even until 6 inches, ending with 4th pattern row.
2nd decrease row—K 4, * k 2 tog, k 4; repeat from *, ending last repeat k 3 (58 sts).
Work even until 8 inches, ending with 4th pattern row.
3rd decrease row—K 3, * k 2 tog, k 3; repeat from * across row (47 sts).
Work even until 10 inches, ending with 4th pattern row.
4th decrease row—K 3, * k 2 tog, k 2; repeat from * across row (36 sts).
Work even until 11 inches, ending with first pattern row. Bind off.
Make other sleeve in same way.

FINISHING—Sew sleeve seams for 4 inches from lower edge (up to row below first decrease row), matching stripes of pattern. Sew underarm seams for 4 inches from lower edge. Sew back edge of each sleeve to each side of back, matching seams at underarm.
Sew front edge of each sleeve to side edge of fronts. Sew shoulder edges of each front yoke to shoulder edges of back yoke.
Join yarn on lower edge of right front yoke at front corner. Working from right side, work 26 s c on neck edge to shoulder seam, 1 s c in each st on back neck edge, 26 s c to lower edge of left front yoke.
Fasten off.
Sew top edge of jacket to lower edge of yoke, with front edges matching, pinning center of top edge of each sleeve at shoulder seam and center of top edge of back at center back of yoke.
Sew clasp on front edge at lower edge of yoke.

Gypsy Bolero No. 1548

(Continued from Page 24)

LEFT FRONT—Cast on 31 sts for lower edge. Work 6 rows of ribbing as on right front.

Pattern—First row (right side)—P 2, * k 1, p 5, repeat from * 3 times more, work 5 sts in ribbing for front border. Continue to work pattern in this way to correspond to right front up to underarm, ending at underarm edge with 4th pattern row. Finish to correspond to right front.

SLEEVES—Cast on 35 sts for lower edge. Work ribbing as on back for 6 rows.
Work pattern as on back, increasing 1 st each side every 6th row twice (39 sts). Do not work increased sts in pattern.
Work even until 5¼ inches from lower edge, ending on wrong side with 6th pattern row.
Bind off 3 sts at beginning of each of next 2 rows for underarm.
Decrease 1 st each side every 2nd row 3 times.
Work 7 rows even.
Decrease 1 st each side of next row.
Work 1 row even.
Decrease 1 st each side of next row.
Bind off 2 sts at beginning of each of next 4 rows, then 3 sts at beginning of each of next 2 rows.
Bind off remaining 9 sts.
Make other sleeve in same way.

FINISHING—Sew seams, matching ribbing. Sew sleeves to armholes, with sleeve seam at center underarm and center pattern at top of sleeve at shoulder seam.
Join yarn at lower edge of right front. Working from right side, work 1 slip st in every row on front edge to shoulder seam.
Fasten off.
Join yarn on left front at shoulder seam and work slip st to correspond to right front edge.
Steam, see page 51.
Buy or make shoulder pads No. 6, see page 47 and sew to armholes.

Two Piece Basque Frock No. 1532

(Continued from Page 26)

7th row—K 2 tog, k 4, repeat between *'s once, k 16, repeat between *'s once, k 4, k 2 tog (32 sts).
9th row—K 2 tog, k 2, repeat between *'s once, k 14, repeat between *'s once, k 2, k 2 tog (26 sts).
11th row—K 2 tog, repeat between *'s once, k 12, repeat between *'s once, k 2 tog (20 sts).
Bind off as to p. Make other sleeve in same way.

FINISHING — Sew seams. Sew sleeves to armholes with sleeve seam at center underarm. Sew pocket linings to wrong side of blouse on 3 sides.

CROCHET BORDER—Join Caledonian Zephyr in first st cast on for underlap, working from right side, ch 1, 1 s c in end of top row of curve, * ch 1, 1 s c in end of next row; repeat from * 10 times, ch 1, 1 s c in first st on lower edge; † ** ch 1, skip 1 st, 1 s c in next st;

repeat from ** 7 times, ch 1, 1 s c in next st †; repeat between †'s to curve at lower edge of right front, work as for curve on left front; continue up right front working ch 1, 1 s c in end of every 2nd row on part worked with size 2 needle and ch 1, 1 s c in end of every 3rd row on part worked with size 1 needles, work to corner, ch 1, 1 s c in same st as last st (increase for corner); continue around neck to top of left front edge, keeping work flat. Ch 2, turn.

2nd row—1 s c under ch 1 of row below, * ch 1, 1 s c under next ch 1; repeat from *, increasing 1 st in corner, ending 1 slip st in 3rd st cast on for underlap, 1 slip st in 4th st. Ch 1, turn.

3rd row—Same as 2nd row, ending 1 s c under turning ch. Ch 2, turn.

4th row—Same as 2nd row, ending 1 slip st in each of 6th and 7th st of underlap. Ch 1, turn.

5th row—Same as 3rd row to top of left front, then work 1 s c in end of each row of border, continue down underlap working 1 s c in end of every 2nd row on part worked with size 2 needle and 1 s c in end of every 3rd row on part worked with size 1 needles, join with a slip st to first st of row. Ch 1, do not turn.

6th row—Work in same direction as last row, working s c with ch 1 between under each ch 1 of row below to top of left front, 1 s c in each st to lower edge; join. Fasten off.

POCKET BANDS — Work 6 rows of crochet border across each pocket opening, turning at end of every row. Sew ends of bands to blouse.

CUFFS—With Caledonian Zephyr, ch 73, 1 s c in 3rd st from hook, * ch 1, skip 1 ch, 1 s c in next ch; repeat from * to end of ch.
Ch 2, turn.
Work 5 more rows in pattern. Fasten off. Sew short ends together. Make a second cuff in same way.
Steam, see page 51.

WEAVING—Cut 12 strands of Shetland Floss, each strand about 6 inches longer than entire length of border on blouse. Thread 2 strands in a tapestry needle and join at beginning of first row of border at left front, working from right side weave double strand of Shetland Floss under 1 thread and over 1 thread of each s c to top of left front, being careful not to draw Shetland Floss too tightly. Fasten off on wrong side. Weave remaining 5 rows of border in same way. See cut, page 44. Weave pocket borders in same way, leaving about ¾ inch Shetland Floss free at each side for fringe.
Weave cuffs, leaving about ¾ inch Shetland Floss free each side of seam for fringe. Sew one edge of cuff to lower edge of sleeve with wrong side of cuff to right side of sleeve and seam of cuff ½ inch toward front from center of sleeve. Turn up cuff on right side. Sew other cuff to correspond. Trim fringe to be ½ inch in length. Sew 11 snap fasteners to underlap and wrong side of right front border, with top fastener in center of neck band, bottom fastener at lower end of front band and remaining fasteners equal distances apart.
Buy or make shoulder pads No. 4, see page 47 and sew to armholes.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Lower edge 67 inches around (pleated).
Hipline (7 inches below Waistline) 35 inches, plus additional sts for pleated effect.
Waistline 26½ inches.
Length 27 inches (including beading).

GAUGE:

Stockinette St—8 sts = 1 inch 11 rounds = 1 inch
1 pattern (24 sts at lower edge) = 2½ inches

With Caledonian Zephyr, cast on 720 sts on circular needle for lower edge. Join taking care sts do not twist on needle. Mark end of rounds as an aid in counting.
First round—* P 1, k 1, p 1, k 1, p 1, k 1, p 9, k 9, repeat from * 29 times.
Repeat this round until 5 inches from lower edge.
First decrease round—* P 1, k 1 alternately for 6 sts, p 9, k 3, k 2 tog, k 4; repeat from * around (690 sts). Work even having 1 st less in each k stripe, until 10 inches from lower edge.
2nd decrease round—* P 1, k 1 alternately for 6 sts, p 3, p 2 tog, p 4, k 8; repeat from * around (660 sts). Work even having 8 sts in each k and p stripe until 15 inches.
3rd decrease round—Decrease 1 st in center of each *k* stripe as for first decrease round (630 sts). Work even until 18½ inches from lower edge, or to within 8½ inches of desired finished length.
4th decrease round—Decrease 1 st in center of *each p and each k stripe* (570 sts at hipline). Work even for 1½ inches, having 7 sts in each p and 6 sts in each k stripe.
5th decrease round—Decrease 1 st in center of each p stripe.
Continue to decrease every 1½ inches as follows, counting previous decrease round in part worked even.
6th decrease round—Decrease 1 st in center of each k stripe.
7th decrease round—Decrease 1 st in center of each p stripe.
8th decrease round—Decrease 1 st in center of *each p and each k stripe* (420 sts).
Work even with 4 sts in each k and and p stripe until skirt measures 25½ inches (1½ inches allowed for beading and blocking). Bind off as follows:
Bind off 5 sts as to p and k, * 1 st on right point of needle, slip 4 p sts from left point of needle to a spare needle and hold in back of work, † insert right point of needle in a k st on left point of needle and a p st on spare needle, k these 2 sts tog and bind off; repeat from † 3 times, bind off next 6 sts as to p and k; repeat from * until all sts are bound off (300 bound-off sts). Do not break yarn. Working from right side, work 1 s c in each *k st* around top of skirt, skipping the p sts.

Beading for Elastic—See page 51.
Join yarn on lower edge at beginning of a p stripe, working from right side, * work 1 s c in each of 9 p sts, † 1 s c in next k st, skip p st; repeat from † twice, 1 s c in each of 9 k sts; repeat from * around.
Pin lower edge of skirt out to given measurement, lapping pleated side of each pattern ¼ inch, stretch to 27 inches in length and block, see page 51.
Insert elastic in beading.

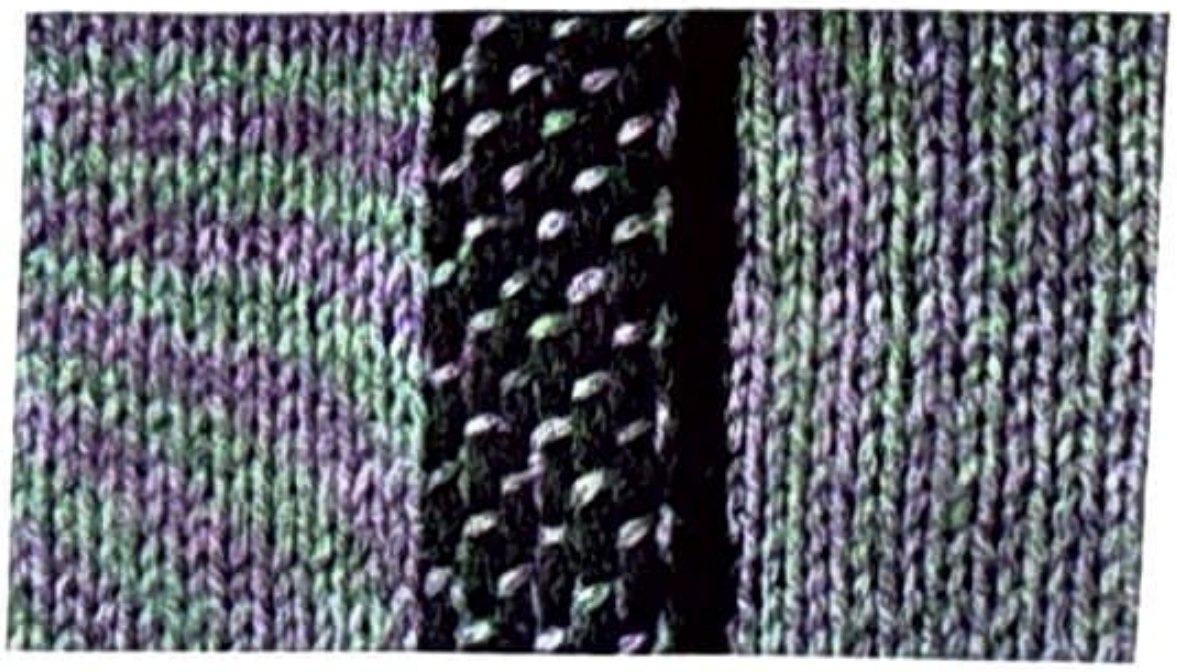

Reefer Jacket Suit No. 1529

(Continued from Page 28)

RIGHT FRONT—With circular needle cast on 76 sts for lower edge. Work to correspond to left front (shaping underarm edge at *beginning* of rows worked from *wrong* side until 1¾ inches from lower edge, ending on wrong side at front edge.

Mark 16th st from front edge for center front.

Next row make first set of buttonholes as follows: Work 3 sts, bind off next 2 sts for first buttonhole of set, work to center front (10 sts from bind off), work center st, work next 10 sts (same number of sts as from first buttonhole to center st) bind off next 2 sts for 2nd buttonhole of set, work to end.

On the following row cast on 2 sts over each of the 2 bound-off sts. Continue to work to correspond to left front, increasing for front edge at *end* of rows worked from wrong side, shaping underarm at *beginning* of rows worked from wrong side and repeating set of buttonholes every 2 inches 7 times, always having 3 sts before first buttonhole of set and same number of sts between center st and 2nd buttonhole of set as between first buttonhole of set and center st. The 8th set of buttonholes should be about 1 inch below neck edge. Complete to correspond to left front.

SLEEVES—With circular needle cast on 54 sts for lower edge. Work pattern as on back, increasing 1 st each side every inch 17 times (88 sts).

Work even until 17½ inches from lower edge.

Bind off 8 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 4th row 13 times (46 sts).

Work 2 rows even.

Working first 2 sts tog, bind off 12 sts at beginning of each of next 2 rows (22 sts).

Work even for 1½ inches for center piece of sleeve (sleeve cap should measure 7 inches above underarm at center).

Bind off for top of sleeve. Make other sleeve in same way.

COLLAR—With circular needle cast on 103 sts.

First row—* K 1, p 1; repeat from *, ending row k 1.

2nd row—K all sts.

Repeat these 2 rows until piece is 2 inches wide.

Bind off.

CUFFS—With circular needle cast on 7 sts. Work pattern as on collar until cuff is 8½ inches long. Bind off. Make other cuff in same way.

FINISHING—Sew seams. Sew bound-off edge at each side of center piece of sleeves to sides of center piece. Sew sleeves to armholes with sleeve seam at center underarm and center of top of sleeve at shoulder seam. Work buttonholes in buttonhole st.

Join yarn on neck edge of right front at center.

Working from right side, work a row of s c around neck edge, ending at center of left front neck edge and holding edge in to 13½ inches. Fasten off.

Join yarn in first s c of last row. Working from wrong side, work s c on shaped neck edge to corner, 3 s c in corner, 6 s c on bound-off sts, 3 s c in corner, continue s c down right front edge, working 1 s c in every 2nd row, 3 s c in corner at lower edge, continue s c on lower edge of jacket, spacing sts to keep edge flat, 3 s c at corner, continue on left front to correspond to right front, ending at center neck edge of left front. Fasten off. With wrong side of collar to right side of jacket, pin center of cast-on edge of collar to center back of neck and ends of collar at center of front neck edges. Sew collar to neck edge. Working from wrong side, work 1 row s c around free edges of collar, working 3 s c in corners and keeping edge flat.

Sew cuff seams. With wrong side of cuffs to right side of sleeves and seams matching, sew lower edge of cuffs to lower edge of sleeves. Working from wrong side, work 1 row s c on top edge of cuffs.

Block, see page 51, pinning to correct measurements.

Buy or make shoulder pads No. 8, see page 47 and sew to armholes.

Sew buttons to left front, opposite buttonholes.

Sew 2 snap fasteners to straight edge at top of neck edge on fronts to fasten to shoulder seams. Sew 2 snap fasteners at lower front edges to hold fronts in place.

SKIRT

MEASUREMENTS FOR BLOCKED GARMENT

Width at lower edge 74 inches around.
Hipline (7 inches below Waistline) 37½ inches.
Waistline 28½ inches.
Length 27 inches.

GAUGE: Size 3 needle

Before Blocking—17 sts=2 inches 10 rounds=1 inch
After Blocking—7 sts=1 inch 10 rounds=1 inch

Skirt is worked with wrong side out and turned right side out after blocking. If desired length of skirt is shorter than 27 inches cast on 16 sts less for lower edge and omit first decrease, if longer than 27 inches add 1 inch before first decrease and remaining length after last decrease.

With circular needle cast on 520 sts for lower edge. Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting.

First round—* K 1, p 1; repeat from * around.

2nd round—K all sts.

These 2 rounds form the pattern and are repeated for entire skirt. On next round work 33 sts and mark last st worked for first gore st, * work next 65 sts and mark last st worked for gore st; repeat from * 6 times more, work 32 sts to end of round.

Carry the 8 gore markings up entire length of skirt.

Work even until 1¼ inches from lower edge.

First decrease round—Work 31 sts, * work next 3 sts tog (gore st and 1 st each side of gore st), work next 62 sts; repeat from * 6 times, work next 3 sts tog, work to end (504 sts).

Work 1¼ inches even, including first decrease round.

2nd decrease round—Work 30 sts, * work next 3 sts tog, work next 60 sts; repeat from * 6 times, work next 3 sts tog, work to end (488 sts). Continue in this way, decreasing 16 sts in a round (working gore st and 1 st at each side of gore st tog) every 1¼ inches 14 times more; having 1 st less before first and after last decrease and 2 sts less between decreases after each successive decrease round, always including previous decrease round in part worked even (264 sts at hipline). Skirt should now measure 20 inches.

Continue to decrease 16 sts in a round every 1¼ inches 4 times more (200 sts).

Work even until skirt measures 27 inches. Bind off, do not break yarn.

Casing for Elastic—Work as for skirts, see page 51. Working from wrong side, work 1 row s c on lower edge, keeping edge flat.

Block, see page 51, pinning so that gore markings match.

Insert elastic in casing. Remove marking threads.

Sheath Frock No. 1530

(Continued from Page 31)

Next row (right side)—P 3, * k 1, p 3, repeat from * across row. Repeat last 2 rows of ribbing 3 times.

Increase row (wrong side)—K 3, p 1, * increase 1 st in next st, k 2, p 1, repeat from *, ending row k last 3 sts (257 sts).

Next row—P 3, * k 1, p 4, repeat from *, ending last repeat p 3.

Next row—K 3, * p 1, k 4, repeat from *, ending last repeat k 3.

Repeat these 2 rows until waist measures 8 inches above normal waistline, ending on right side at left front edge.

Next row—Work 59 sts and slip on a strand of yarn for left front, bind off next 14 sts for left underarm; work until 111 sts on needle and slip these sts on a strand of yarn for back; bind off next 14 sts for right underarm; work across remaining sts of right front (59 sts).

Armhole and Neck Shaping of Right Front—Continue ribbing, decreasing 1 st at armhole edge every 2nd row 6 times (53 sts).

Work even until 3½ inches above underarm, ending at front edge.

Next row—Work 18 sts, bind off next 26 sts (knitting the k and purling the p sts) for pocket opening, work to end of row.

Next row—Work 9 sts, slip the 26 sts of one pocket flap to left end of needle (wrong side of flap to right side of waist) and work across these sts, work across remaining 18 sts (53 sts).

Work even until 5 inches above underarm, ending at front edge.

Bind off 8 sts at beginning of next row for neck edge. Decrease 1 st at neck edge every 2nd row, keeping armhole edge even until 6¾ inches above underarm, ending at armhole edge.

Shoulder—Bind off 4 sts at beginning of next row, then bind off 5 sts from armhole edge every 2nd row 6 times, continuing to decrease at neck edge as before until there are 11 decreases in all, then keep neck edge even (34 sts for shoulder).

Armhole and Neck Shaping of Left Front—Take up the 59 sts of left front on size 3 needle. Join yarn at underarm edge and work to correspond to right front up to pocket opening, decreasing for armhole at beginning of rows worked from right side and ending on wrong side at armhole edge.

Next row—Work 9 sts, bind off next 26 sts for pocket opening, work to end of row.

Finish to correspond to right front.

Back Armholes—Take up the 111 sts of back. Join yarn at right underarm.

Continuing ribbing, decrease 1 st each side every 2nd row 6 times (99 sts). Work even until 6½ inches above underarm.

Shoulders—Bind off 4 sts at beginning of each of next 2 rows, then 5 sts at beginning of each of next 12 rows (34 sts for each shoulder). Bind off remaining 31 sts for back of neck.

SLEEVES—**Cuff**—With size 1 needle, cast on 53 sts for lower edge.

First row (right side)—K 1, * p 1, k 1, repeat from * across row.

2nd row—P 1, * k 1, p 1, repeat from * across row.

Repeat these 2 rows until cuff measures 2 inches, ending on right side. Change to size 3 needle.

First row—K 2, * p 1, k 3, repeat from *, ending last repeat k 2.

2nd row—P 2, * k 1, p 3, repeat from *, ending last repeat p 2.

Repeat these 2 rows until 4 inches from lower edge of cuff, ending on right side.

Increase row—K 2, * p 1, increase 1 st in next st, k 2, repeat from * 11 times, p 1, k 2 (65 sts).

Next row—P 2, * k 1, p 4, repeat from *, ending last repeat p 2.

Next row—K 2, * p 1, k 4, repeat from *, ending last repeat k 2.

Work ribbing as in last 2 rows for 7 rows more.

Increase 1 st each side of next row and repeat increases every 10th row 10 times, working increased sts in ribbing (87 sts).

Work even until 17¼ inches from lower edge.

Bind off 7 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 6 times (61 sts).

Work even until 4 inches above underarm.

Decrease 1 st each side of next row and repeat decreases every 2nd row twice. Bind off 2 sts at beginning of each of next 6 rows, then 3 sts at beginning of each of next 4 rows. Bind off remaining 31 sts. Work other sleeve in same way.

COLLAR—With size 3 needle, cast on 136 sts for outside edge. Work ribbing as on pocket flap for 10 rows, ending on right side.

Decrease row—P 1, * k 1, k 2 tog, k 1, p 1, repeat from * across row (109 sts).

Work ribbing of k 1, p 3 until collar measures 2 inches, ending on wrong side.

Bind off for neck edge. Do not break yarn.

Working from right side, work 2 s c in every 3 rows on end of collar, 3 s c at corner, 1 s c in each cast-on st, 3 s c at corner and 2 s c in every 3 rows on other end. Fasten off.

FINISHING—Sew sleeve and shoulder seams matching ribs.

Sew sleeves to armholes with sleeve seam at center underarm and center rib of sleeve at shoulder seam, holding in extra fullness of sleeve across top of armhole. Join yarn at top of front edge on left pocket flap. Working from right side, work 2 s c in every 3 rows on front edge, 3 s c at corner, 1 s c in each cast-on st, 3 s c at corner and 2 s c in every 3 rows on back edge.

Work s c on right pocket flap to correspond.

Join yarn on left front at corner of neck edge. Working from right side, work 1 slip st in every row to bottom of opening, 1 slip st at bottom of opening and 1 slip st in every row on right front to neck edge. Fasten off. With right side of collar to wrong side of waist and ends of collar at front edges, sew neck edge of collar to neck edge of waist (holding neck edge in to 14½ inches).

Sew bound-off sts of pocket opening to wrong side of pocket flaps. Working from right side, work 1 row s c on lower edge of skirt, keeping work flat; join. Ch 1, turn, work 1 s c in each st of row below; join. Fasten off.

Casing for Elastic—Work casing at normal waistline as for one piece dress, see page 51.

Block, see page 51, stretching skirt to 27½ inches in length from normal waistline to lower edge and stretching each part of garment to specified width.

Sew slide fastener to front edges of waist from bottom of opening to neck edge.

Sew seam binding over shoulder seams, holding each seam in to 4¾ inches. Insert elastic in casing.

Buy or make shoulder pads No. 7, see page 47, and sew to armholes.

RIBBON SHOULDER PADS

No. 1

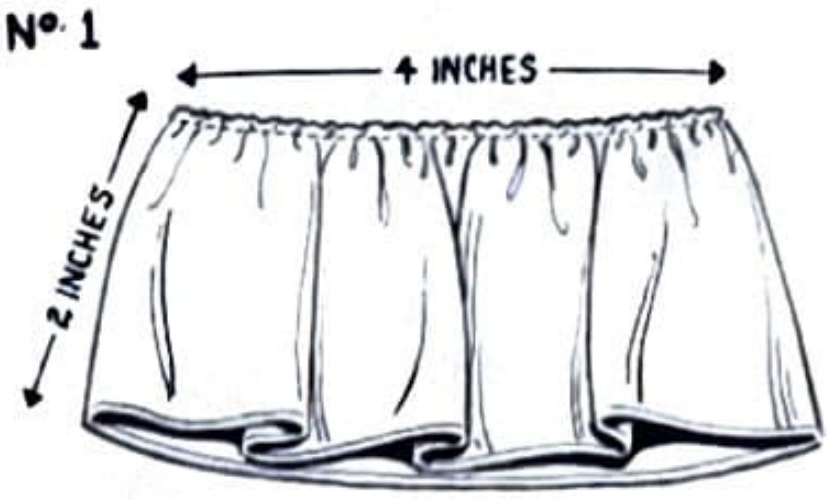
4 INCHES
2 INCHES

No. 2

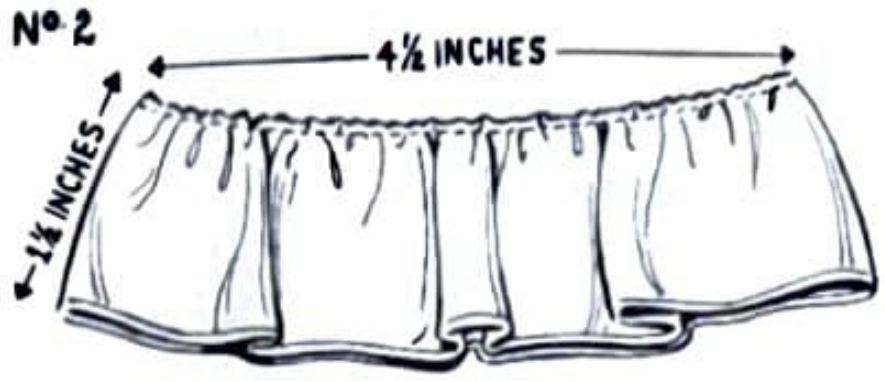
4½ INCHES
1½ INCHES

No. 3


4 INCHES
1½ INCHES

No. 4

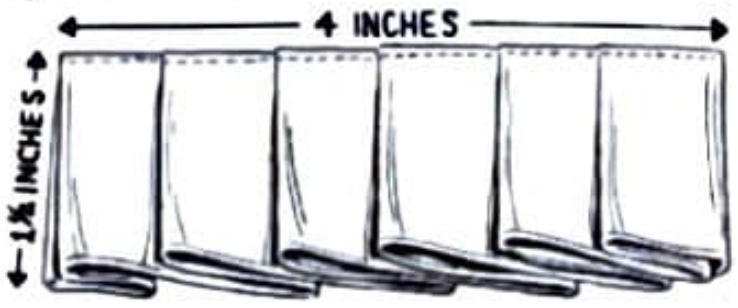
4 INCHES
1½ INCHES

STUFFED SHOULDER PADS

No. 5

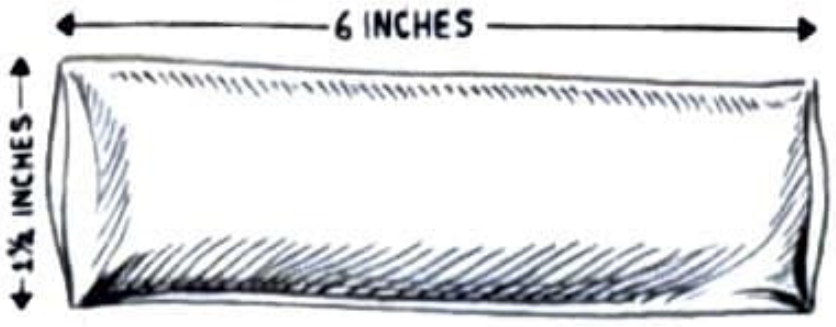
6 INCHES
1½ INCHES

No. 6

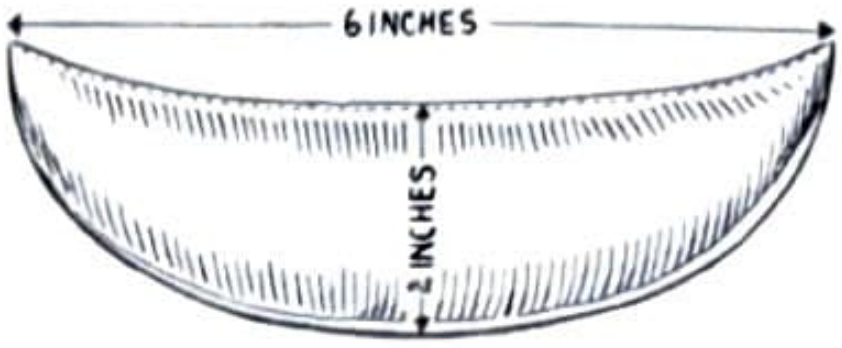
6 INCHES
2 INCHES

No. 7

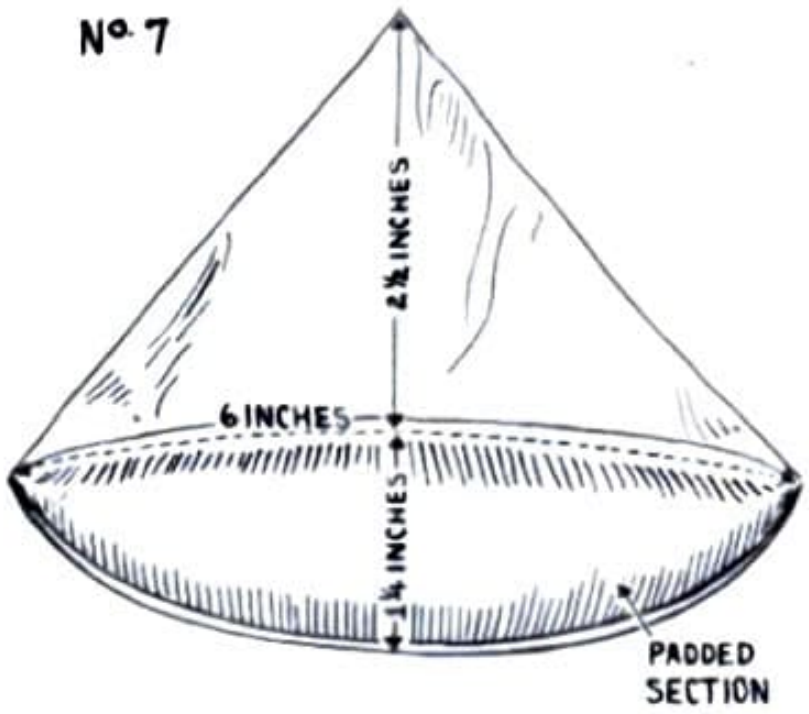
2½ INCHES
6 INCHES
1¼ INCHES
PADDED SECTION

No. 8

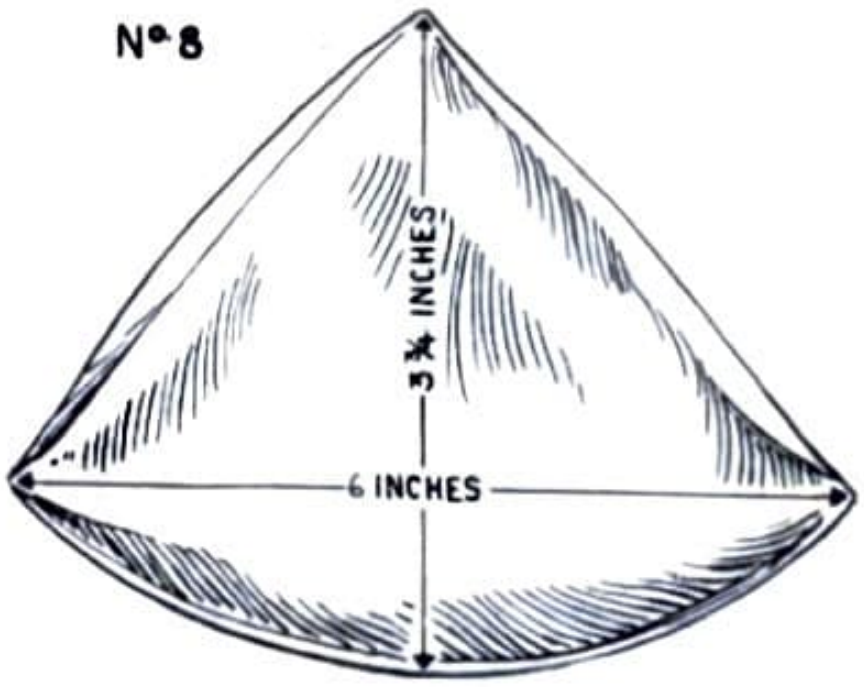
3¾ INCHES
6 INCHES

Guide to Interchangeable Yarns

If you should want to make the garment which you have selected of some yarn other than that called for in the directions, follow the guide given below.

Interchangeable
- Angel Crepe†
- Angel Flake†

Interchangeable
- Cassimere Sport Yarn†
- Shetland Floss

Interchangeable
- Sport Angora
- Caledonian Zephyr†
- Kashyr Sweater Yarn†

Interchangeable
- Cobble Crepe†
- Paislee Tweed†

Interchangeable
- Tweed Knit†
- Magic Print†

Interchangeable
- Popcorn Sport Yarn†
- Standard Sports Yarn

---

† All yarns marked with a † have been Registered U. S. Pat. Off. or Registration Applied For

KNITTING STITCHES

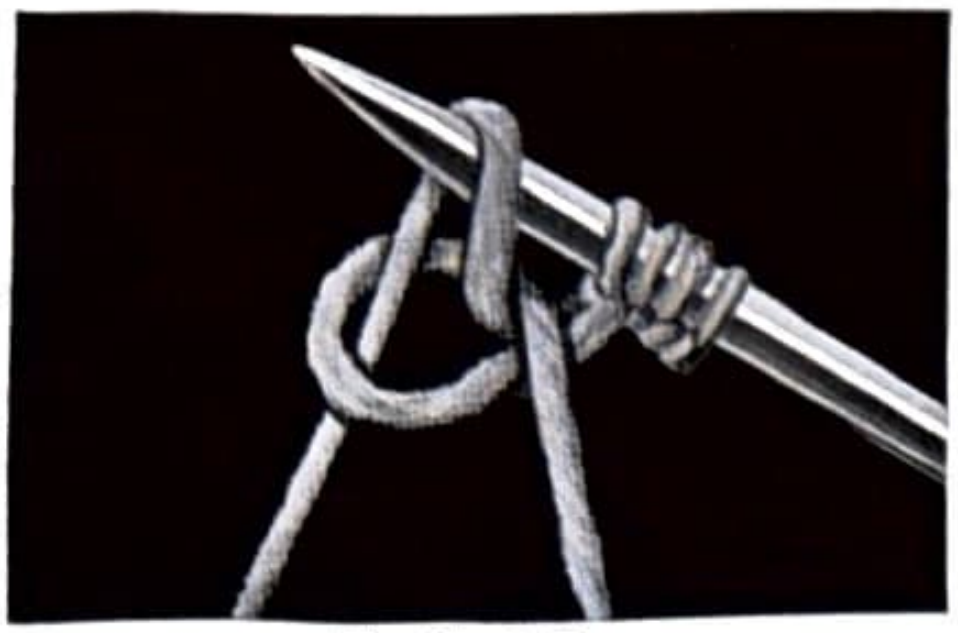
To Cast On

To Cast On

Make a loop, leaving a long end and slip loop to a needle; with loose end, make a loop on left thumb; insert needle in this loop and with end attached to ball, knit a st on the needle; tighten loose end with left hand.

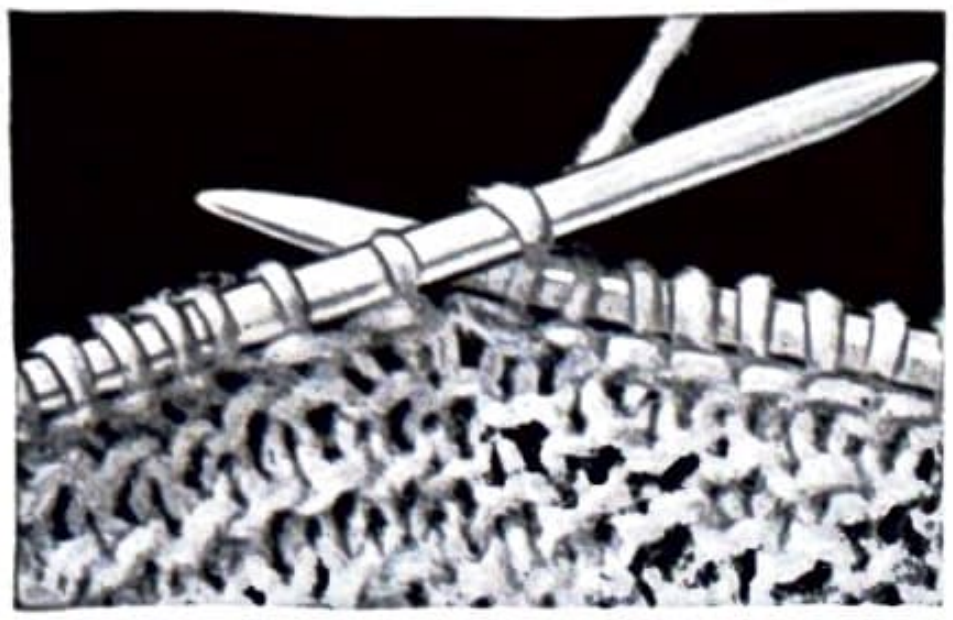
To Knit

To Knit (k)

Holding the needle containing the sts in the left hand, with the yarn back of the work, insert the right-hand needle into first loop and make a loop on right-hand needle, as for casting on, slip loop from left needle. The loops should be retained on the right hand-needle. Work each st in this way until no loop remains on the left-hand needle. When the row described above is repeated back and forth, any number of times, the work becomes alike on both sides and is called GARTER STITCH.

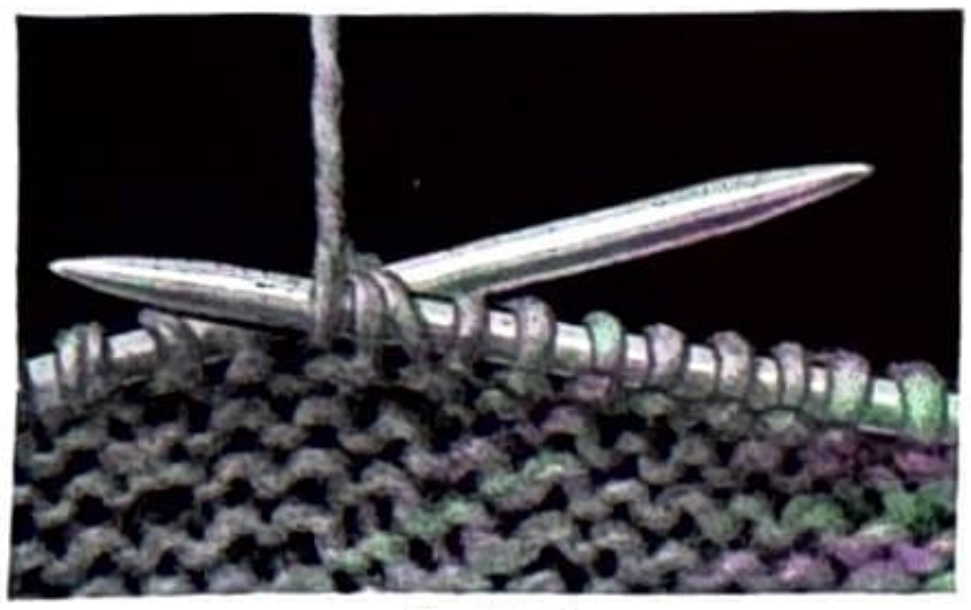
To Purl

To Purl (p)

Hold as for plain knitting, but bring the yarn to front of the work. Insert the right-hand needle from right to left through the front of the next st, pass the yarn around the back of the right-hand needle, draw it over the needle and through the loop, backwards, and let the st slip off the left needle, just as in plain knitting. When purling comes after plain knitting in the same row, the yarn must be brought from back to front under the point of the right-hand needle, and it must be brought back again in the same manner before returning to plain knitting.

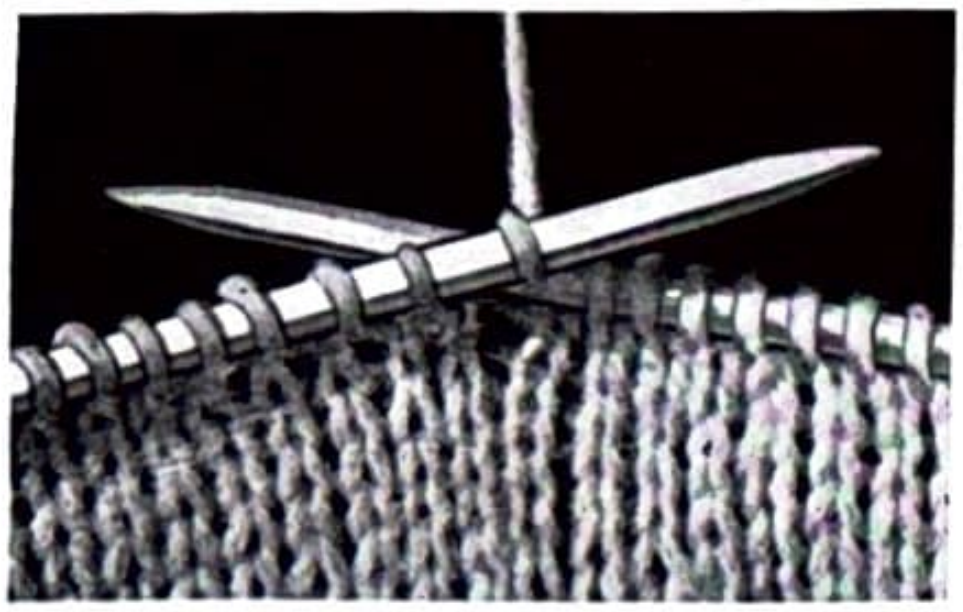
Stockinette Stitch

Stockinette Stitch

Cast on a desired number of sts on a needle, k 1 row, p 1 row for the required length.

To Slip a Stitch in Knitting

Take it from one needle to the other without knitting. Insert needle as if to knit, unless otherwise stated.

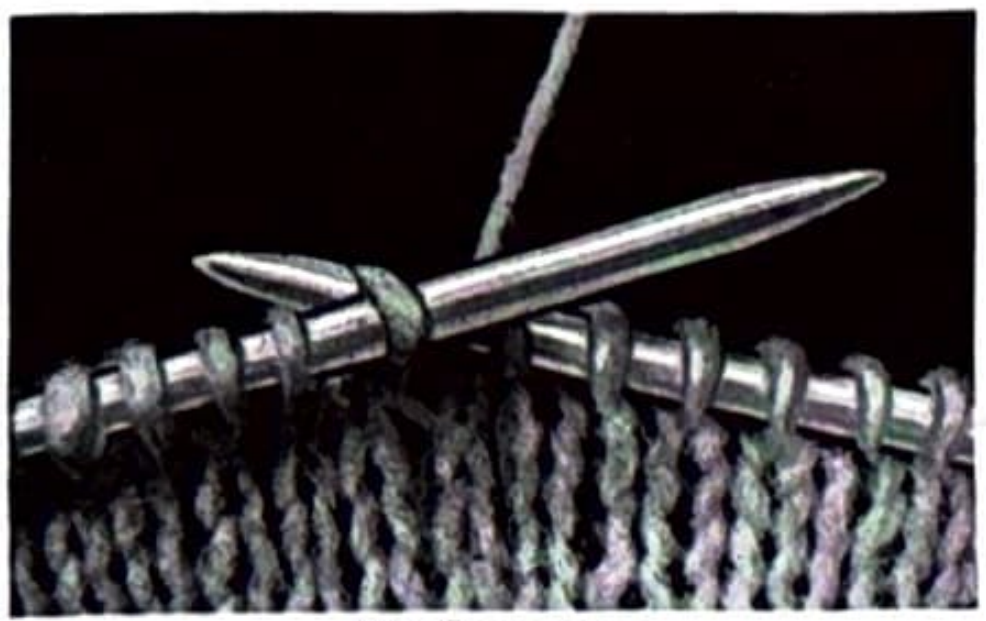
To Increase

To Increase

1—Knit 1, but do not slip it from the needle as usual; turn needle to which the sts are being knitted behind the first needle, and knit a second st on the back thread of the same st, after which slip the latter from the needle as usual. (Illustrated.)

2—Knit 1, draw up an extra st in side of next st *in row before last row,* knit this st, k next st.

By these two methods of increasing, a st is added without making a hole in the work.

3—"Over" means to throw the yarn over the right hand needle, which is another way of increasing a st. This method makes a hole in the work and is used to provide a space for a beading, to work a lace pattern, etc.

KNITTING STITCHES

To Decrease or Narrow

1—Knit 2 sts together. Work as with plain knitting, but insert needle into two sts at a time, instead of one.

2—Slip 1, k 1, pass the slipped st over the knitted st ("slip, knit and pass").

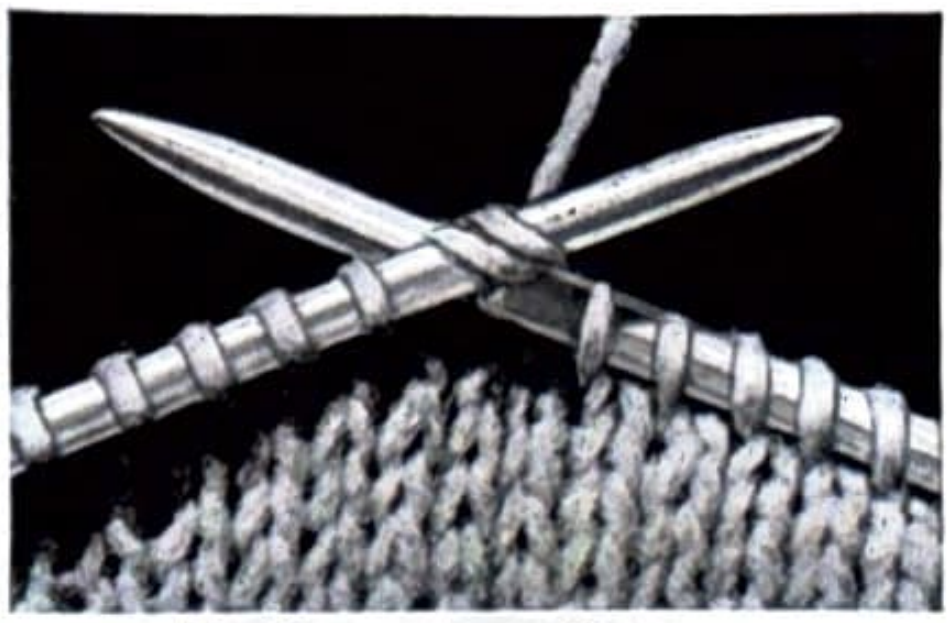

To Decrease or Narrow

To Bind Off

Knit 2 sts, * pass the first st over the second, knit another st, again having 2 sts on the needle. Repeat from * until only 1 st remains. Break off the yarn and draw it through the last st.

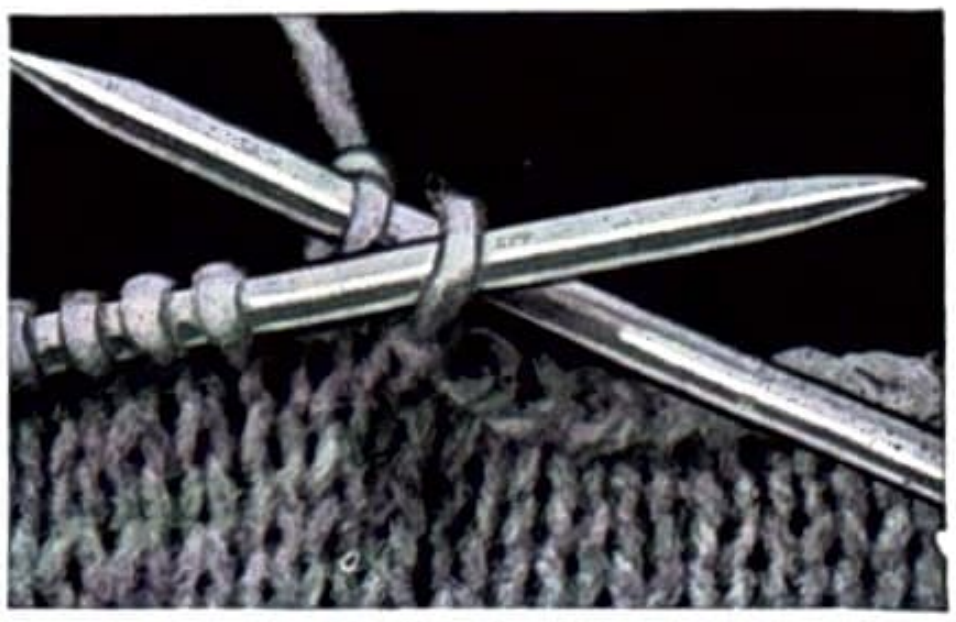

To Bind Off

Seed, or Moss Stitch

Cast on an uneven number of stitches. *First row*—K 1, p 1 and repeat across row, ending k 1. Repeat this row for the length required, always having a knitted stitch come over a purled stitch and vice versa.

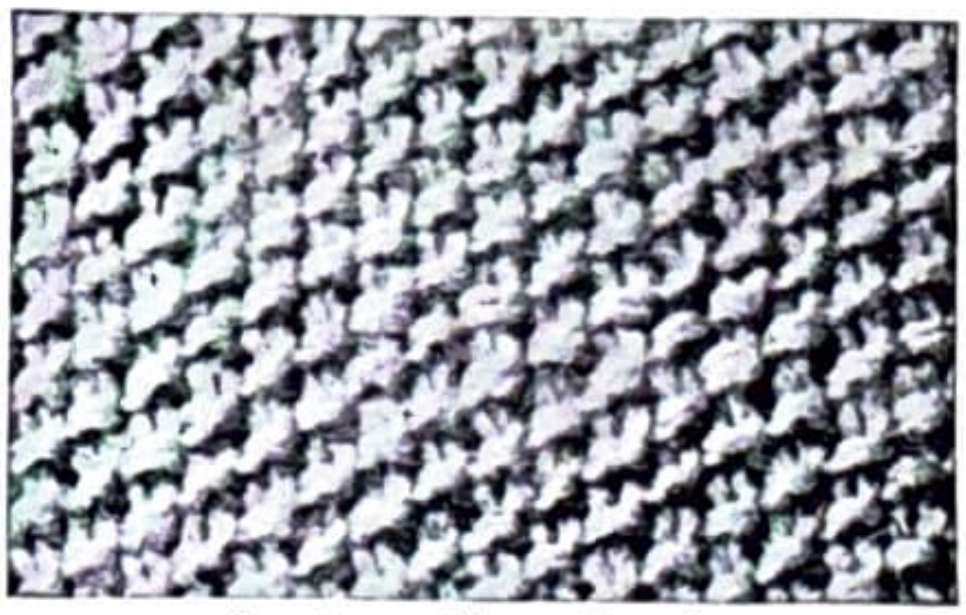

Seed, or Moss Stitch

To Sew Seams

Hold edges to be joined close together, with right side toward you. Using a tapestry needle, bring yarn from wrong to right side; beginning at top insert needle through 2 threads on edge of piece at right (see cut), pull yarn through; insert needle through 2 threads on edge of piece at left, pull yarn through. Continue in this way keeping seam elastic.

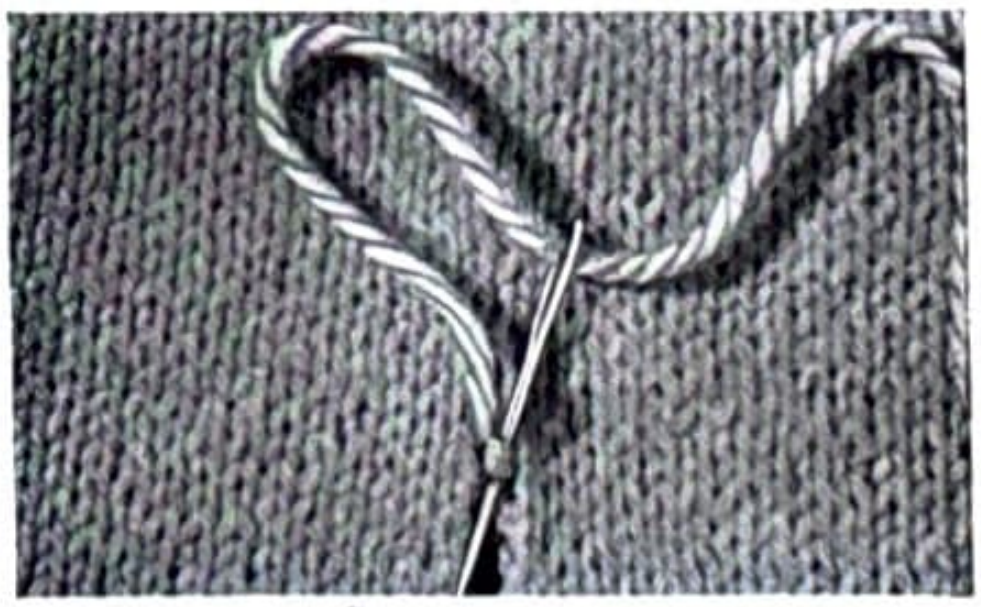

Sew Seams

Weaving Stockinette Stitch

Thread a tapestry needle and bring pieces to be joined close together. Draw up yarn in first st on upper piece, inserting needle from wrong side; insert needle from right side in first st on lower piece and bring up through next stitch from wrong side — draw up yarn; * insert needle from right side in same st as before on upper piece and bring up through next st from wrong side — draw up yarn; insert needle from right side in same st as before on lower piece and bring up through next st—draw up yarn; repeat from * until all sts are joined, and fasten yarn well before breaking off.

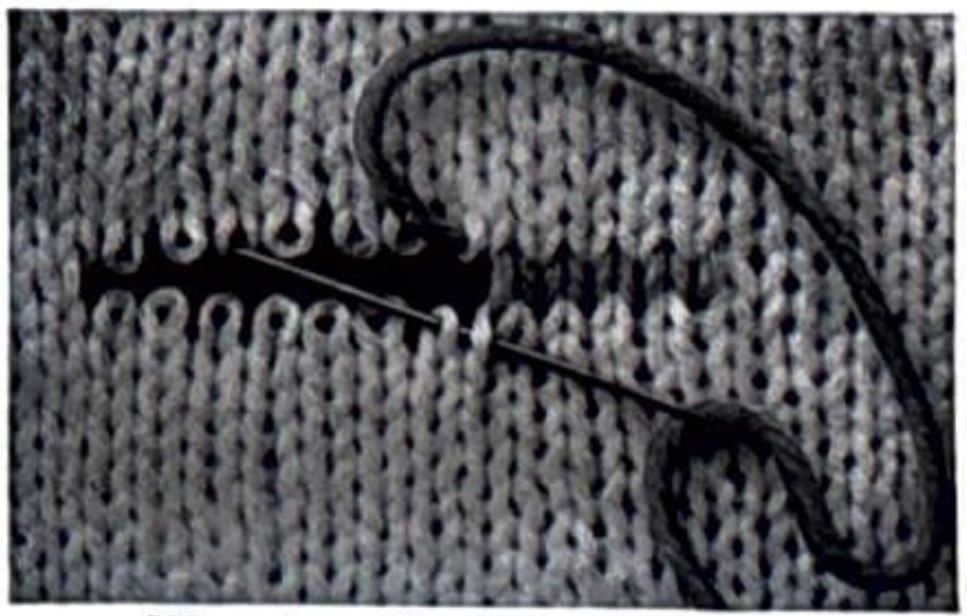

Weaving Stockinette Stitch

CROCHET STITCHES

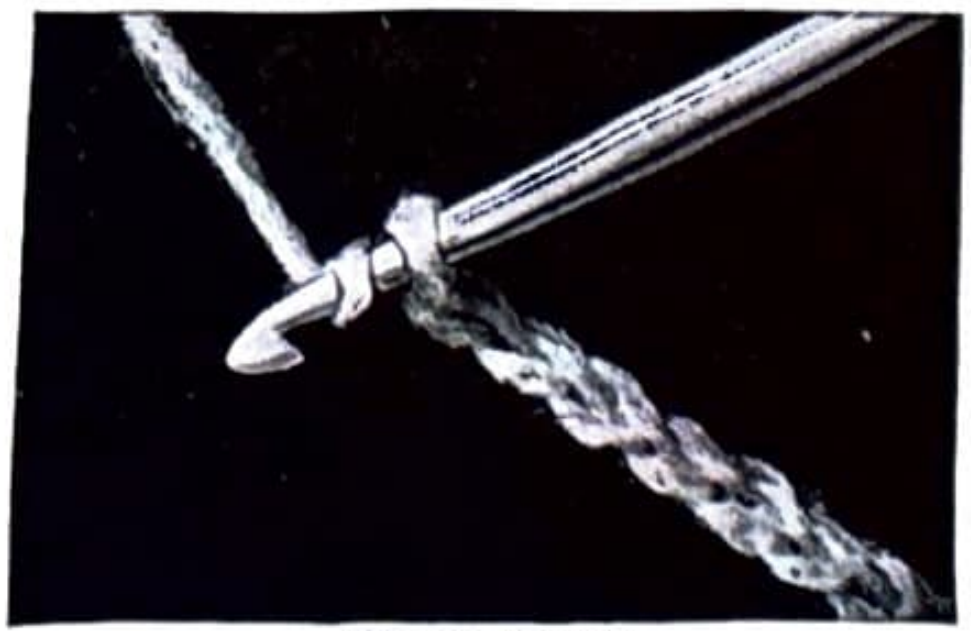

Chain Stitch

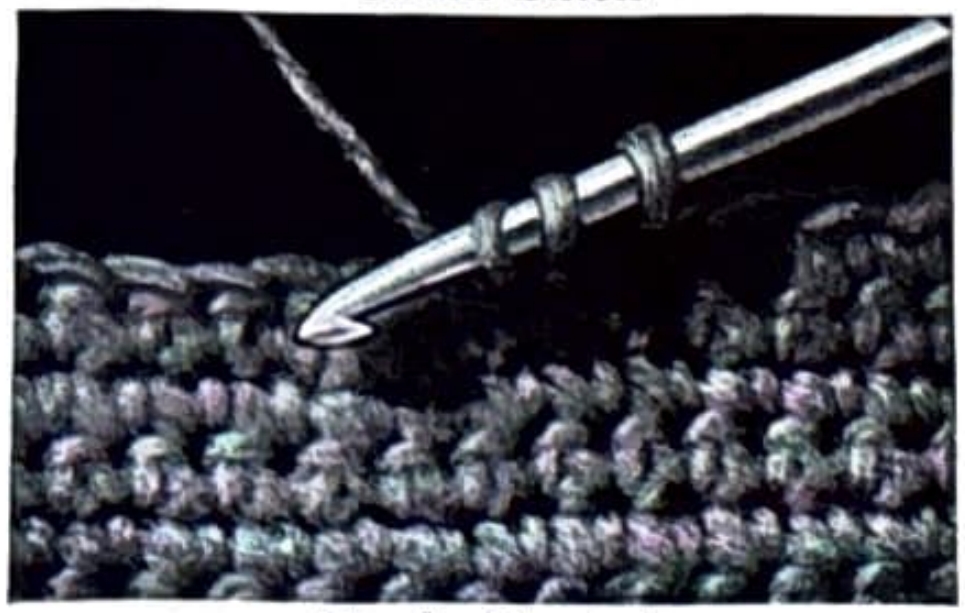

Single Crochet

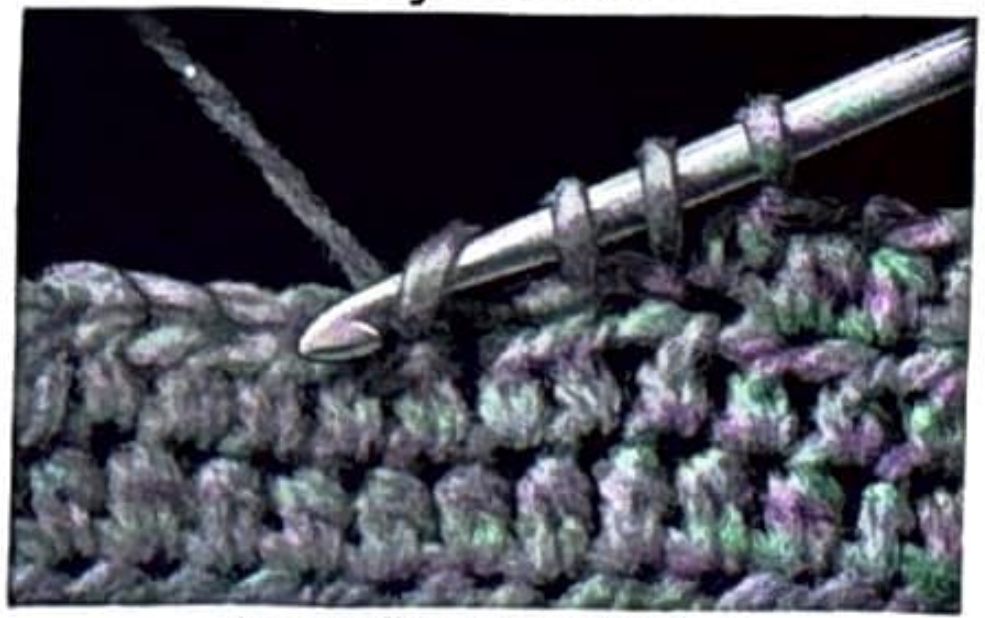

Short Double Crochet
or Half Double Crochet

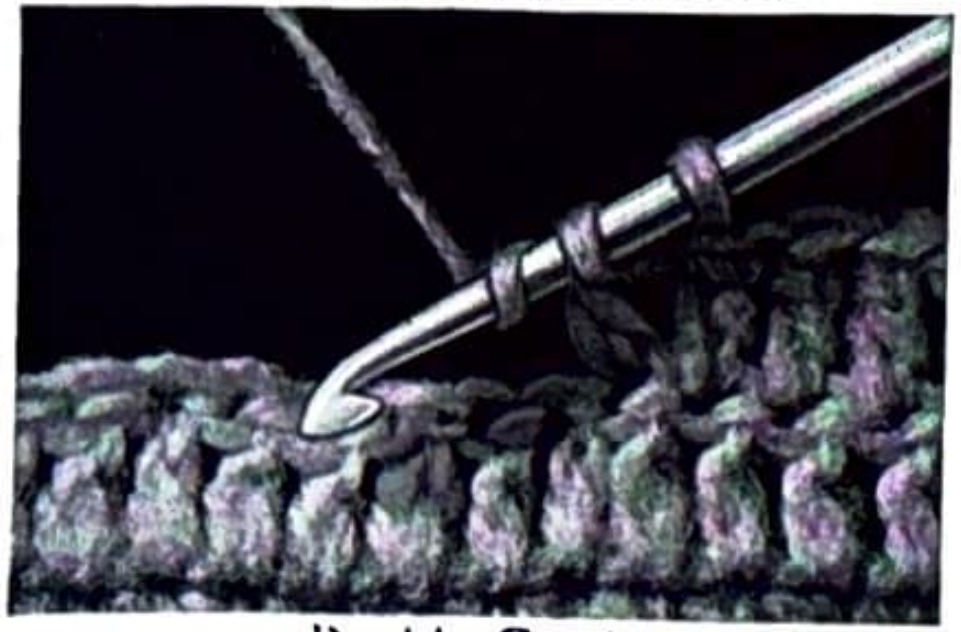

Double Crochet

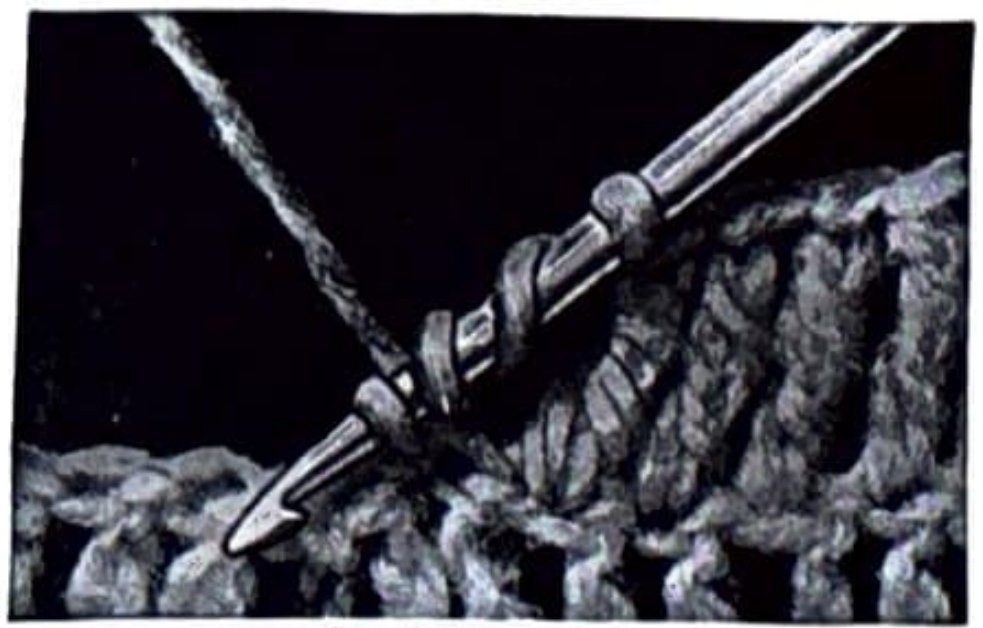

Treble Crochet

Chain Stitch (ch)

Make a loop on hook, * wrap and draw yarn through the preceding loop, repeat from * the desired length. Each loop is called one chain st.

Crocheted Slip Stitch (slip st)

Insert the hook in next st, wrap and draw through both loops on hook.

Single Crochet (s c)

Make a chain the length required, turn, insert the hook in 2nd ch from hook and draw yarn through it, wrap and draw yarn through both loops on hook. Continue to work in this way in each ch to end of row.

2nd row—Turn the work, ch 1, * insert the hook in top of next st, taking up both threads, wrap and draw yarn through, having 2 loops on the hook, wrap and draw yarn through both loops on hook. Repeat from * across row.

Short Double Crochet (s d c) or Half Double Crochet (h d c)

Make a chain the length required, turn, skip 2 ch, * wrap and draw up a loop in next ch, wrap and draw yarn through all 3 loops on hook; repeat from * in each ch to other end. A new row is begun with 2 chs after turning.

Double Crochet (d c)

Make a chain the length required, turn, wrap, insert the hook in the 3rd ch from hook and draw yarn through, having 3 loops on hook; wrap and draw yarn through 2 loops, again wrap and through 2 loops. For the 2nd st, * wrap and draw yarn through next ch, wrap and through 2 loops and then wrap and through 2 loops more, as before; repeat from * to other end of chain. *2nd row*—Turn, ch 2, wrap, insert the hook in the top of the first d c of preceding row, taking up both threads, and work off as in first row.

Treble Crochet (tr)

Treble crochet is made in the same way as double crochet, only wrap the yarn around the hook twice, instead of once. Work the loops off the hook as follows: wrap, draw through 2, wrap, draw through 2, wrap and draw through 2.

ABBREVIATIONS AND TERMS USED IN KNITTING AND CROCHETING

ch—chain
s c—single crochet
s d c—short double crochet
h d c—half double crochet
d c—double crochet
tr—treble
k—knit
p—purl
st—stitch
tog—together
over—yarn over
slip, k and pass—slip 1, k 1, pass the slipped st over the knitted st.

An *Asterisk* (*) indicates that the directions immediately following are to be repeated the given number of times, in addition to the original. Thus "repeat from * 3 times" means to make 4 times in all.

The ** and † are used in the same way.

Even means that a row is to be worked without either increase or decrease.

Over means to throw the yarn over the right-hand needle, which is another way of increasing a st.

Work means to continue in the stitch which has been described.

HELPFUL HINTS

Check Your Gauge First — Before starting your garment, knit a small sample. If you cannot procure the exact gauge given in the direction, try a needle one or even two sizes smaller or larger until you obtain the exact gauge specified for the garment you intend to make. The needles recommended in the directions are based as nearly as possible on the average knitter's work, but because some knitters work tightly and others loosely, we suggest you test your own work first to verify the gauge.

If you find you have to use a different size needle than that called for in the directions, the change will not in any way alter your garment, provided your gauge is in accordance with that called for in the directions.

Directions for Garments in This Book Are Based on the Following Measurements:

	Bust	Waist	Hips (7 inches below waist)
Size 16 (Size 34)	35 inches	28 inches	37 inches
Size 18 (Size 36)	37 inches	30 inches	39 inches
Size 20 (Size 38)	39 inches	32 inches	41 inches
Size 40	41 inches	34 inches	43 inches
Size 42	43 inches	36 inches	45 inches

To Change Size of Garments to Another Regulation Size—Add the number of sts required to make 1 inch (see gauge at beginning of directions for garment to be made) to both the back and front of garment for each size larger than the size given in directions; or subtract the number of sts required for 1 inch from both back and front for each size smaller. When a pattern stitch is used, add (or subtract) the number of sts given for 1 or more repeats (or "multiples") of pattern, according to the number of inches required. Then follow the directions given. When shaping armholes, bind off 1 st more each side for one size larger (1 st less each side for one size smaller). Make the armhole ¼ inch longer at both back and front for one size larger (¼ inch shorter for one size smaller). When shaping shoulders, bind off more (or less) sts than given in directions for shoulders and back of neck, adding 1/3 of the extra sts to each shoulder and remaining sts to back of neck. When casting on the sts for lower edge of sleeve, add ¼ inch for each size larger, then increase ¼ inch extra. This will make sleeve ½ inch wider at underarm for each size larger.

If You Vary from a Regular Size—Take your own measurements wherever you differ from the size given in the directions. Multiply the number of inches of each of these measurements by the number of sts (or rows) equivalent to 1 inch, to obtain the number of sts (or rows) required at each particular place where it is necessary to make your garment larger, or smaller. Follow directions given, changing number of decreases or increases, to obtain desired width or the number of rows between decreases or increases to obtain desired length. In making a garment, always count the rows on the front and back, being careful to have the same number on each piece. Count the rows in same way on each sleeve.

Casing for Elastic for Skirts—Holding wrong side of skirt toward you, ch 3, * skip 1 st, 1 slip st in the next st at left in 4th row below; ch 3, 1 slip st at top of skirt in 3rd st at left of first st, ch 3, repeat from * around top of skirt, ending with a slip st in the first st. Turn right side toward you. Work 1 row s c around top of skirt, working 1 s c in each st. Join with a slip st. Fasten off.

Casing for Elastic for 1 Piece Dress—Work as for casing for skirts, commencing 2 rounds above waistline and working next slip st in 2nd round below waistline, omitting the row of s c on top of skirt.

Beading for Elastic—With crochet hook, work 1 tr (twice around hook) in first st on waistline, * ch 2, skip 2 sts on edge, 1 tr in next st, repeat from * around, join with a slip st, ch 1, work 1 s c in each st around top of skirt, join with a slip st. Fasten off.

To Wash Knitted Garments—First take complete measurements of your garment, then using Lux Soap Flakes, make thick suds with hot water; then add enough cold water to make it lukewarm (comfortable wrist temperature). Avoid using hot water. Immerse garment and gently work suds through the fabric—do not rub or twist or allow the weight of the garment to pull it out of shape. Keep the garment supported in the hands when squeezing out water.

Rinse thoroughly in three lukewarm waters immediately after washing, squeezing garment gently between the hands to remove soap. Do not twist or wring. Roll garment between two turkish towels to knead out excess moisture — unroll at once and shape garment according to original measurements, leaving it on turkish towel. Let it dry slowly, not forgetting to stretch it frequently into its natural shape, according to measurements. While garment is still damp, block according to directions.

To Block or Steam Yarn Garments — Turn garment wrong side out. Lay flat on a pressing board. Pin edges of garment if necessary to make it lie flat. For one-piece dress, pin across waistline, then pin skirt according to directions given below. Lay a wet cloth over garment. Pass a hot iron over the cloth allowing the steam to go through the garment. Do not allow the weight of the iron to rest on the garment. Leave garment pinned until thoroughly dry.

To Block or Steam Yarn Skirts—Turn wrong side out. Pin top of skirt to pad every ¾ inch. Stretch skirt to desired width and length and pin to pad. Steam as for yarn garments. Leave until dry. Turn up side next to pad and steam. Steam out creases formed at sides.

To Stretch Pattern Stitch Garments in Blocking—In special cases when a stitch of the rib type is used, it is necessary to stretch garments out to their correct width. Pin garment to pressing board, stretching to measurements given for finished garment. Then follow directions for steaming garments or skirts, using enough pressure on iron so that garment will retain desired measurements. Be careful not to flatten pattern too much or to leave mark of the iron by pressing too hard.

When Garment Is Not in Use — Be sure to lay your garment flat when not in use.

Buy Sufficient Material — At the time you make your initial purchase of the yarn for the garment you intend to make, it is important that you buy the complete amount of each color necessary to finish the article, making sure that it is all of one *dye lot number* as the next lot number of any color may differ slightly in shade from the original lot you purchased and make it impossible to complete your garment satisfactorily.

IMPORTANT—Dry Cleaning is recommended for Chenille.

Costs less than 1¢ to LUX a

Keep your sweaters soft and new-looking this safe, thrifty LUX way:

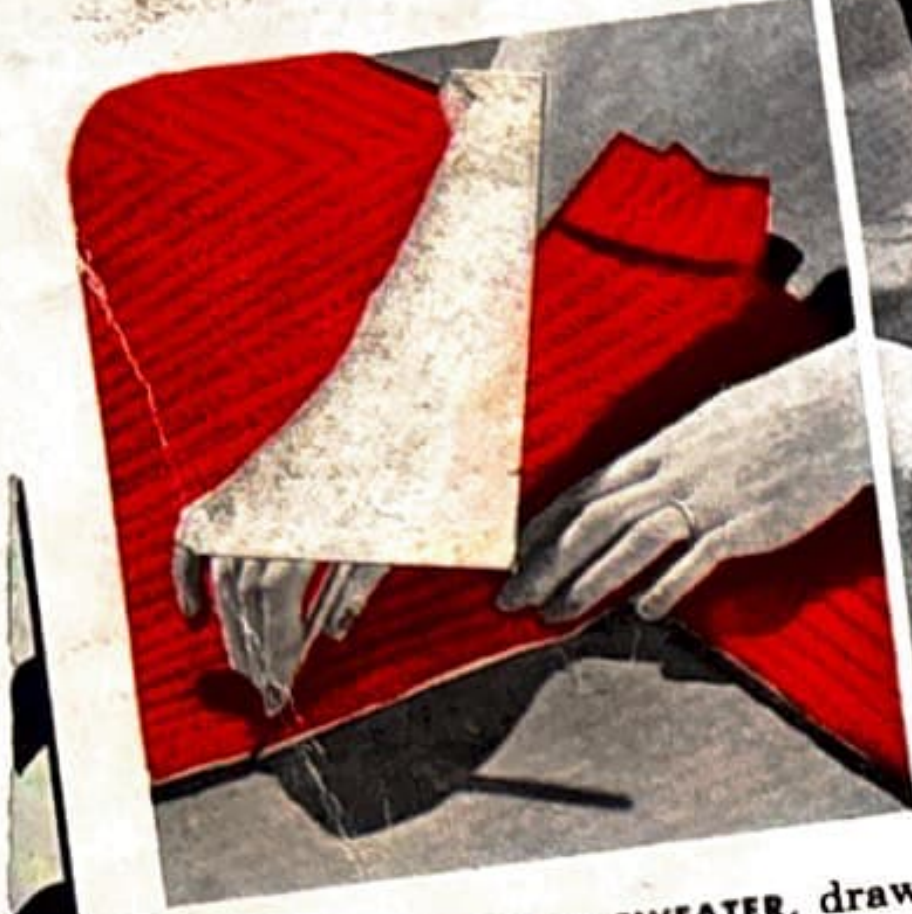

1. BEFORE WASHING SWEATER, draw an outline on heavy paper for record of **size.** Remove unwashable trimmings. Make rich, almost cool Lux suds. Turn garment inside out.

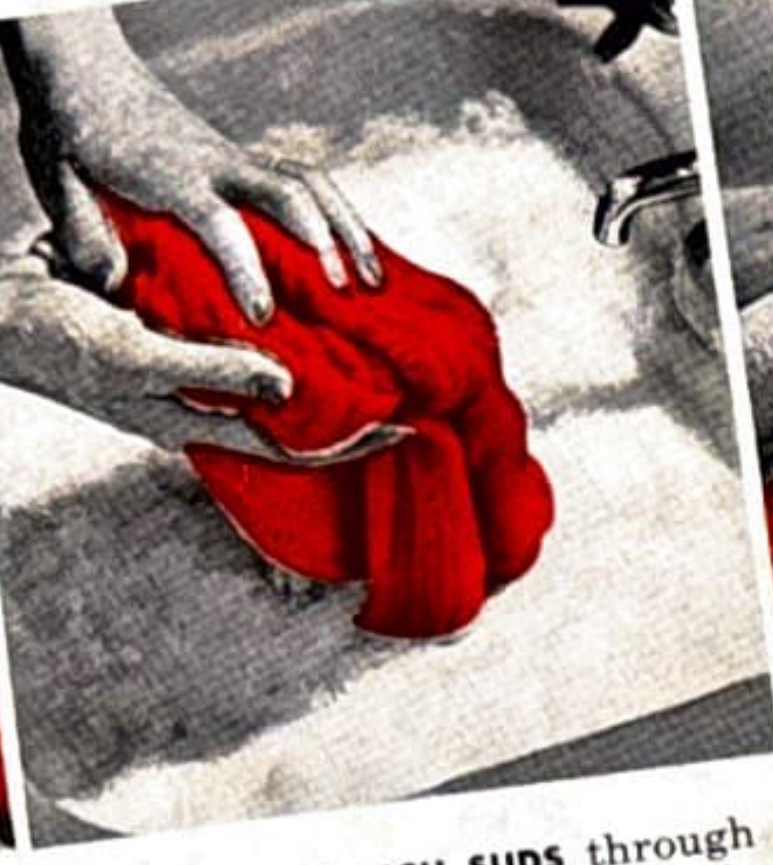

2. SQUEEZE RICH SUDS through sweater. Don't **soak** or **rub.** Rubbing tends to **shrink** and mat woolens. Support garment by hands to avoid stretching.

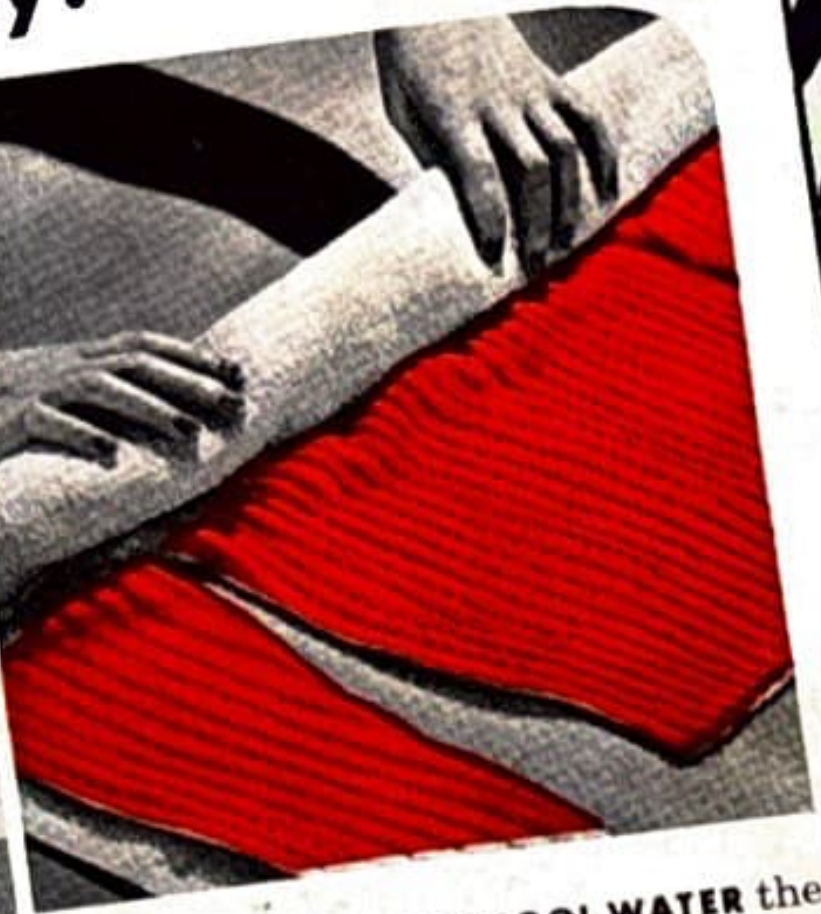

3. RINSE IN ALMOST COOL WATER the **same** temperature as the suds. Squeeze out excess moisture by rolling garment in a Turkish towel and kneading gently. Unroll at once.

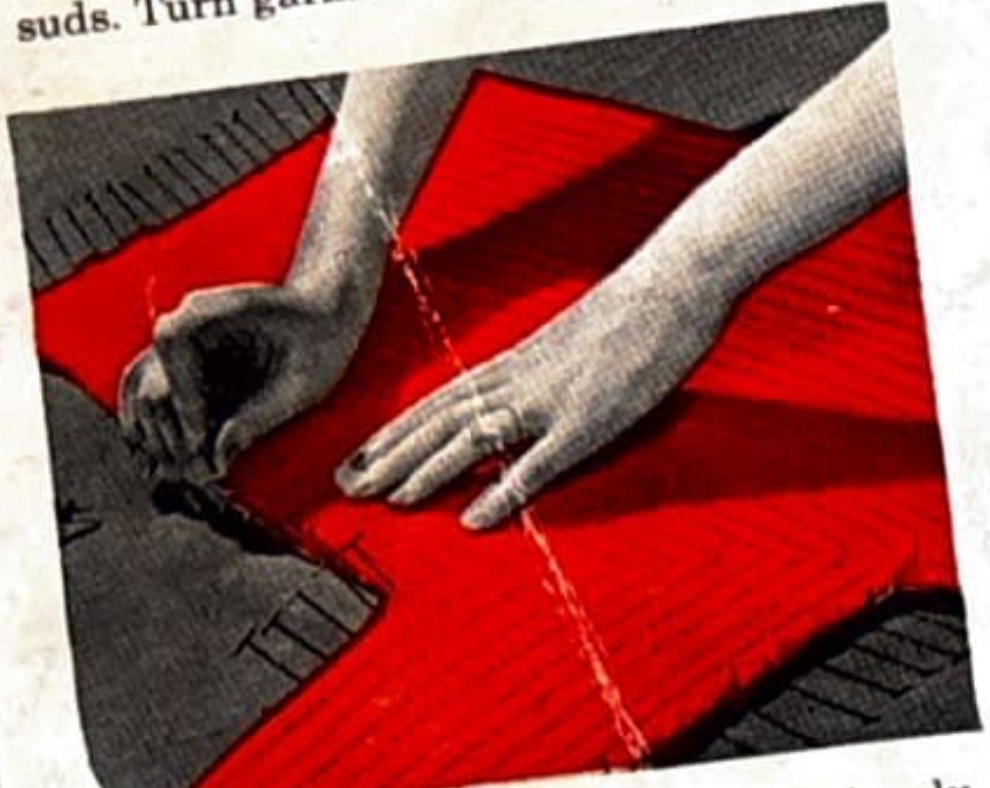

4. EASE TO OUTLINE drawn previously. Pin garment, **wrong side out,** to a firm surface with rustproof pins, 1½ inches apart. Dry away from excessive heat. Place damp cloth over sweater, press pin marks out with warm iron.

Less than a penny's worth of Lux (unless the water is hard) will wash a sweater beautifully! In hard water, just a little extra Lux makes an abundance of suds. It's thrifty care for *all* knitted washables.

With Lux care delicate wools stay soft, unshrunken—new-looking longer. With Lux, you avoid hot water (which shrinks wool), cake-soap rubbing (which mats fibers) and soaps with harmful alkali. Lux has no harmful alkali—safe in water, safe in Lux! Buy the thrifty BIG box!

A little goes so far, LUX is thrifty for sweaters—

NO HARMFUL ALKALI IN
LUX
LUX

PRINTED IN U. S. A.